





Test Report issued under the responsibility of:



TEST REPORT IEC 62841-2-3 Electric motor-operated hand-held tools, transportable tools and lawn and garden machinery - Safety - Part 2-3: Particular requirements for hand-held grinders, disc-type polishers and disc-type sanders	
Report Number.....	6176379.50A
Date of issue.....	2023-12-07
Total number of pages	112 pages
Name of Testing Laboratory preparing the Report	DEKRA Testing and Certification (Shanghai) Ltd. 3F, #250 Jiangchangsang Road, Building 16, Headquarter Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai, 200436, China
Applicant's name	LEE YEONG INDUSTRIAL CO., LTD.
Address.....	No.2, Kejia Rd., Douliu City, Yunlin County 64057, Taiwan
Test specification:	
Standard	IEC 62841-2-3:2020 for use in conjunction with IEC 62841-1:2014
Test procedure	CB Scheme
Non-standard test method	N/A
TRF template used.....	IECEE OD-2020-F1:2022, Ed.1.5
Test Report Form No.	IEC62841_2_3B
Test Report Form(s) Originator	DEKRA Certification B.V.
Master TRF	2023-05-25
Copyright © 2023 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	Straight Grinder	
Trademark (s)	AGP	
Manufacturer	LEE YEONG INDUSTRIAL CO., LTD. No.2, Kejia Rd., Douliu City, Yunlin County 64057, Taiwan	
Model/Type reference	SG6; SG150; SG30; SSG; STRAIGHT-MATE (30A-606); STRAIGHT-MATE (30A-626); RISG6-1500; PT-G10601	
Ratings	110-120 Vac; 50-60 Hz; 1400 W; n _o : 1600 - 4800 min ⁻¹ ; Ø 150 mm; M14; Class II 220-240 Vac; 50-60 Hz; 1500 W; n _o : 1600 - 4800 min ⁻¹ ; Ø 150 mm; M14; Class II	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	DEKRA Testing and Certification (Shanghai) Ltd.
Testing location/ address :	3F., #250 Jiangchangsan Road, Building 16, Headquarter Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai 200436 CHINA	
Tested by (name, function, signature) :	David Yang	
Approved by (name, function, signature) ... :	Paul Liu	
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address :		
Tested by (name, function, signature) :		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address :		
Tested by (name + signature) :		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address :		
Tested by (name, function, signature) :		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ... :		
Supervised by (name, function, signature) :		

<p>List of Attachments (including a total number of pages in each attachment):</p> <p>Test report constituents:</p> <ul style="list-style-type: none"> - 6176379.50A covering IEC 62841-1 and IEC 62841-2-3 and pictures (total 112 pages) - 6176379.50B covering EN GD to IEC 62841-1 (total 12 pages) - 6176379.50C covering EN GD to IEC 62841-2-3 (total 8 pages) - 6176379.50D covering AS/NZS national difference to IEC 62841-1 and IEC 62841-2-3 (total 3 pages). 		
<p>Summary of testing:</p> <p>The product tested passed all the examinations of the applied standards mentioned in section General remarks of this report.</p> <p>The conformity verdict is ‚Pass‘ if the measured value is less or equal to the limit.</p> <p>Information in critical components list (see table CRITICAL COMPONENTS INFORMATION) as well as used plastic materials provided by applicant.</p>		
<p>History of testing</p>		
Date of issue	CBTR	Project-Task
-	-	-
<p>Tests performed (name of test, test clause and date test performed):</p> <p>All applicable clauses of the standard have been done at CBTL.</p>		<p>Testing location (CBTL, SPTL, CTF, Subcontractor):</p> <p>DEKRA Testing and Certification (Shanghai) Ltd. 3F #250 Jiangchangsan Road Building 16, Headquarter Economy Park Shibe Hi-Tech Park, Jing'an District, Shanghai 200436 CHINA</p>
<p>Summary of compliance with National Differences (List of countries addressed):</p> <p>This tool is tested to and complies with EN 62841-1:2015+A11:2022 and EN 62841-2-3:2021+A11:2021, thus complying with the EU group differences.</p> <p>Noise level: $L_{PA} = 88,0 \text{ dB (A)}$ $L_{WA} = 96,0 \text{ dB (A)}$ $K = 3,0 \text{ dB (A)}$</p> <p>Vibration level: $a_{h,SG} = 7,7 \text{ m/s}^2$ $K = 1,5 \text{ m/s}^2$</p> <p>This tool is also complying with the AS/NZS national difference.</p>		

Use of uncertainty measurement for decisions on conformity (decision rule): /

No decision rule is specified by the IEC standard, when comparing **the measurement** result with **the** applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other: ... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.


Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

51.8mm

25.1mm

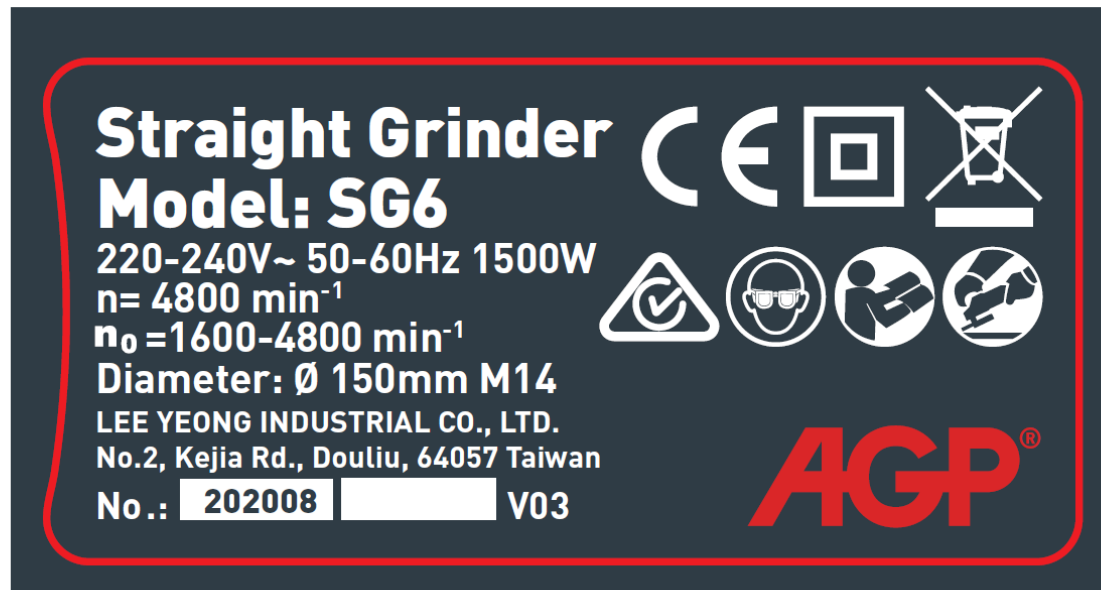

Note: Representative design of labels illustrated, for final ratings refer to page 2.

Test item particulars.....:	
Category of equipment	Hand held
Protection Class of tool	Class II
Method of supply cord attachment	Type Y
Degree of protection.....	IPX0
Accessories and detachable parts included	N/A
Other options included	N/A
Classification of installation and use.....: Normal	
Supply Connection	Supply cord with a plug
Possible test case verdicts:	
- test case does not apply to the test object.....	: N/A
- test object does meet the requirement.....	: P (Pass)
- test object does not meet the requirement.....	: F (Fail)
Testing.....:	
Date of receipt of test item	2023-11-27
Date (s) of performance of tests	2023-11-28 to 2023-12-05
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>IEC 62841-1:2014; IEC 62841-2-3:2020; EN 62841-1:2015+A11:2022; EN 62841-2-3:2021+A11:2021 AS/NZS 62841.1:2015 + A1:2016+A2:2021; AS/NZS 62841.2.3:2021</p> <p>This report was based on previous test report with No. 6138612.50 dated 2023-01-12 and replaces it. (CE certificate No.: 6138612.01AOC, dated 2023-01-12; CB certificate No.: NL-85872, dated 2023-01-12)</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 02:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist, they shall be identified in the General product information section.	

Name and address of factory (ies) : LEE YEONG INDUSTRIAL CO., LTD.
No.2, Kejia Rd., Douliu City, Yunlin County 64057,
Taiwan

General product information and other remarks:

This Straight Grinder is designed for grinding with an abrasive wheel.
The 110-120 V and 220-240 V version shares the same construction.
Model SG150; SG30; SSG; STRAIGHT-MATE (30A-606); STRAIGHT-MATE (30A-626); RISG6-1500;
PT-G10601 are same as SG6.

All relevant tests were both done at 110-120 V and 220-240 V of SG6.

Modification 1 report:

The original Test Report No. 6138612.50 dated 2023-01-19 modified on 2023-12-05 to include the following addition.

- Update the European Standard EN 62841-1:2015+A11:2022.
- Add AS/NZS National Difference Standard AS/NZS 62841.1:2015 +A1:2016 + A2:2021 and AS/NZS 62841.2.3:2021.

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
5	GENERAL CONDITIONS FOR THE TESTS		
5.1	General test conditions in this clause apply unless otherwise specified in this standard		P
5.2	Tests made on separate samples		P
	At manufacturer's discretion, fewer samples used		N/A
	Cumulative stress from successive tests on electronic circuits avoided		P
	Several tests conducted on a single sample, results not affected by previous tests.		P
5.3	Evident from construction of the tool that a particular test(s) not applicable, test(s) not made		N/A
5.4	Tests carried out with the tool and/or any movable part of it		P
	Tool placed in the most unfavourable position that may occur in normal use.		P
5.5	Tools provided with controls or switching devices and setting can be altered by the user, controls or devices adjusted to their most unfavourable settings		N/A
	Electronic speed control devices set at their highest speed	4800 /min	P
	Adjusting means accessible without the aid of a tool, this subclause applies whether the setting can be altered by hand or with the aid of a tool. Adjusting means not accessible without the aid of a tool and setting is not intended to be altered by the user, this subclause does not apply.		N/A
	Adequate sealing prevents alteration of setting by user		N/A
5.6	Tests conducted in a draught-free location, and unless otherwise specified, in (20 ± 5) °C		P
	Tests conducted at (23 ± 2) °C due to temperature limited temperature sensitive device		N/A
5.7.1	Tools for a.c. only, tested with a.c. at rated frequency, if marked		P
	Tools marked for a.c./d.c., tested with the most unfavourable supply		N/A
	Tools for a.c. not marked with rated frequency, or marked 50-60 Hz or 50/60 Hz, tested with either 50 Hz or 60 Hz, whichever is the most unfavourable		N/A
	Tools with series motors only, either frequency may be used		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.2	Tool rated for more than one rated voltage or a voltage range, tested at the highest voltage (V)	110 - 120 Vac; 220 - 240 Vac	P
5.7.3	Tools where there is no marked rated current , tests that require a value for rated current conducted at current measured rated input at the lowest rated voltage or the lower value of the rated voltage range		P
5.8	Alternative heating elements or attachments which are made available for the tool by manufacturer, tool is tested with those heating elements or attachments which give the most unfavourable results		N/A
5.9	Tools are tested with the specified flexible supply cord connected to the tool.		P
5.10	Parts of class I tool having accessible parts not connected to an earthing terminal or earthing contact, and not separated from live parts by an intermediate metal part connected to an earthing terminal/contact, were checked on class II construction requirements.		N/A
5.11	Class I tool or class II tool having parts operating at safety extra-low voltage, such parts on requirements specified for class III tools		N/A
5.12	When testing electronic circuits, supply is free from perturbations from external sources that can influence the results of the tests		N/A
5.13	Heating element, if any, cannot be operated unless the motor is running, element is tested with the motor running		N/A
	Heating element, if any, can be operated without the motor running, element is tested with or without the motor running, whichever is the more unfavourable		N/A
	Heating elements incorporated in the tool connected to a separate supply unless otherwise specified		N/A
5.14 M	For attachments performing a function within the scope of IEC 62841-2-3, tests made in accordance with IEC 62841-2-3		P
5.15	Method of torque loading chosen so as to avoid additional stresses, such as by side thrust.		P
	Additional loads necessary for the correct operation of the tool considered		N/A
	Brake used for loading, load applied gradually		P
	Modification of output means for purpose of loading permitted to allow connection to brake		P
5.16	Tools intended for SELV tested using a supply transformer intended to be used with the tool.		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
5.17	For requirements based on the mass of the tool, the mass is determined without supply cord and without tool bits or accessories, but with all equipment and attachments needed for normal use		P
M	Required accessories, equipment and attachments as given in the IEC 62841-2-3		P
	If tool has more accessories, equipment or attachments heaviest configuration shall be used to determine mass.		P
A	Mass of the grinder includes wheel guard, flanges and handles		P
A	Mass of the disc-type polisher or disc-type sander includes flanges and handles		P
5.18	For linear and angular dimensions, ISO 2768-1, class "c" applicable, unless tolerances are specified		P
5.19	All electrical measurements made with a maximum measurement error of 5 %.		P
	Instruments for measuring voltage have input resistance $\geq 1 \text{ M}\Omega$ and parallel capacitance $\leq 150 \text{ pF}$.		P
5.20	Thermal equilibrium considered achieved when the total deviation of three successive temperature readings, taken at 3 min intervals, is $\leq 4 \text{ K}$		P
	Induction motor, measurement time of 1 hour is considered sufficient.		N/A
6	RADIATION, TOXICITY AND SIMILAR HAZARDS		
6.1	No harmful radiation, no toxic or similar hazard		P
6.2	For tool with laser to indicate a cutting line or the like, laser class 2M or lower according to IEC 60825-1:2007.		N/A
	Tool marked with symbol(s) as in of IEC 60825-1: 2007 for the relevant laser class.		N/A
6.3	Tool fitted with non-coherent light sources, users of tools are cautioned as to the risk of potential photo-biological harm, if such harm exist		N/A
6.3.1	Visible light indicators (pilot lamps) and Infrared sources used for signalling and communication considered to have no risk of photo-biological harm, no marking required.		N/A
6.3.2	Tools emitting visible light from electroluminescent, incandescent or LED sources, considered to be for short term, non-general light services use where exposure is both incidental and intermittent		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Marked with either: – “CAUTION Do not stare at operating lamp”, or – symbol 60417-6041(2010-08)		N/A
	If no reasonable risk of harm, markings may be omitted		N/A
	No reasonable risk of harm considered, as either a) light emission at a distance of 200 mm along any direction of the tool < 500 Lux; or b) luminance light emission < 10 000 cd/m ² in the range of visible light; or c) light source (if not focused by external optics) is in Risk Group 1 or lower evaluated by the methods of IEC 62471; or d) tool itself evaluated by the methods of IEC 62471 and found to be in Risk Group 1 or lower.		N/A
6.3.3	For light derived by sources other than those mentioned in 6.3.2, product evaluated by the methods of IEC 62471, markings guided by 5.4 of IEC/TR 62471-2:2009.		N/A
7	CLASSIFICATION		
7.1	Tool is Class I, II, or III with respect to protection against electric shock	Class II	P
7.2	Degree of protection against harmful ingress of water per IEC 60529		N/A
M	No degree of protection other than IPX0 specified in IEC 62841-2-3		–
8	MARKINGS AND INSTRUCTIONS		
8.1	Tool marked with rated voltage(s) or rated voltage range(s) (V)	110-120 V 220-240 V	P
	Tool for star-delta connection clearly marked with the two rated voltages (e.g. 230 Δ / 400 Y V)		N/A
	Tool complying with this standard for a voltage range, may be marked with any single voltage or smaller voltage range within that range (V)		N/A
	Symbol for nature of supply or rated frequency or frequency range. The symbol for nature of supply placed next to rated voltage (Hz)	50-60 Hz	P
	Rated input or current marked (W or A)	See nameplate	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Tool has alternative components to be selected by a control device, rated input or rated current is that corresponding to the highest rated input or rated current		N/A
	Class II symbol for class II tools	See nameplate	P
	IP number other than IPX0		N/A
A	Rated no-load speed (/min or min ⁻¹	4800	P
A	Rated capacity (e.g. mm)	Ø 150 mm	P
8.1.1	Tools with range of rated values (e.g. voltage, frequency) can be operated without adjustment over the range, marked with the lower and upper limits of the range separated by a hyphen, e.g. 115-230 V .:		P
	Different rated values to be adjusted by the user / installer, tool marked with the these values separated by an oblique stroke, e.g. 115/230 V		N/A
8.1.2	Upper and lower limits of rated power input marked,		N/A
	unless difference between upper and lower limits of rated voltage range do not exceed 20 % of the mean value, in which case the rated input is related to mean value of voltage range.		N/A
8.2	Tool marked with M - "WARNING – To reduce the risk of injury, user must read instruction manual", or - sign M002 of ISO 7010	M002 of ISO 7010	P
	"WARNING" in capital letters not less than 2,4 mm high, not separated from either the cautionary statement or the symbol ISO 7000-0434A or ISO 7000-0434B		N/A
	Statement verbatim except that "operator's manual" or "user guide" may replace "instruction manual".		N/A
	Additional symbols in accordance with ISO 7010 or designed in accordance with ISO 3864-2/3864-3. .:	See nameplate	P
	Cautionary statements having the same signal word such as "WARNING" may be combined into one paragraph under one signal word		N/A
M	Order of statements: markings required by Part 1, markings required by IEC 62841-2-3 and then any optional markings		P
A	Tool marked with - "WARNING – Always wear eye protection", or - sign M004 of ISO 7010, or - appropriate symbol, see IEC 62841-2-3:2020		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	Tool that requires at least two handles as per clause 19.4 marked with - "WARNING – Always operate with two hands", or - appropriate symbol, see IEC 62841-2-3:2020		P
A	Type B wheel guard in accordance with Annex AA marked with - "WARNING – Not for cut-off operations", or - appropriate symbol, see IEC 62841-2-3:2020		N/A
8.3	Business name and address of manufacturer, at least country or state, city and postal code.....:	See nameplate	P
	Business name and address of authorized representative, at least country or state, city and postal code.....:		N/A
	Designation of the tool (may be coded)	Straight Grinder	P
	Designation coded, code explained in the instructions		N/A
	Designation of series or type		P
	Year of manufacture and a date code identifying at least the month of manufacture.....:		P
	Tools parts shipped separately for assembly by the end user, each part marked for identification on the part or the package		N/A
	"> 25 kg" if the mass of the tool is over 25 kg		N/A
A	Tool provided with a threaded spindle intended to accept threaded accessories in accordance with 8.14.2, marked with the spindle thread size	M14	P
A	Direction of rotation of the spindle indicated on the tool by arrow, raised or recessed, or any other means no less visible and indelible.....:		P
	No misunderstanding through additional markings		P
8.4	Markings of 8.1 to 8.3 not on detachable part of the tool		P
	Markings of 8.2 and 8.3 clearly discernible from outside the tool		P
	Markings other than symbols, fold-over label on power cords used (Y or Z attachments only)		N/A
	Other markings may be visible after removing cover		P
	Indications for switches and controls placed on or in vicinity of components		P
	Not placed on parts which can be repositioned		P
	Not positioned such that the marking is misleading		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
8.5	Tool can be adjusted to suit different rated voltages, change in voltage clearly discernible		N/A
	Correct Wiring diagram fixed to tool, may be on inside of a cover but not on a label loosely attached to the tool		N/A
8.6	Use of correct units		P
	Use of correct symbols		P
	Additional symbols explained in the instructions, no misunderstanding		P
	Other units and their symbols belong to the international standardized system.		P
	Other units and their symbols same as international standardised system.....:	CE marking and WEEE symbol	P
8.7	Connection diagram affixed to tool with more than two supply conductors, unless terminals clearly identified		N/A
	The earthing conductor not a supply conductor		N/A
	Wiring diagram indicates how the windings are to be connected for tools for star-delta connection		N/A
8.8	Terminals, except for type Z attachments, marked on non-removable part with specified symbols:		-
	- Terminal exclusively for neutral connection marked with "N"		N/A
	- Earthing terminal marked with symbol IEC 60417-5019 (2006-08)		N/A
	The markings not placed on screws, removable washers or other parts which might be removed		N/A
8.9	Switches which may result in a hazard marked or placed to indicate which part of tool they control.....:		P
8.10	"Off" position of multi stable power switch indicated by figure O (symbol of IEC 60417-5008 [2002-10])		N/A
	A momentary power switch which can be locked in the "on" position is not considered as a multi -stable switch.		N/A
	Push-buttons for "off" function only, figure O used, button coloured red or black.....:		N/A
	Figure O not used for any other indication		P
	Flap/cover covers only the start button, colour of the flap/cover not black, red or yellow.....:		N/A
	Flap/cover covers only the stop button, colour of the flap/cover red or yellow.....:		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
8.11	Control devices adjusted during operation and the like provided with markings as specified, unless...	1,2,3,4,5,6	P
	... fully "on" position opposite to "off" position		N/A
	Figures used for different positions with O for "off" position, and figures reflecting greater output for other positions..... :		N/A
	Indication for different positions placed on the device itself, or adjacent to the operating means		N/A
8.12	Markings easily legible		P
	Markings withstood durability test: - 15 s with water soaked cloth - 15 s with petroleum spirit soaked cloth		P
	Signs are in contrast to their background, clearly legible from a distance of not less than 500 mm		P
	Effect of normal use taken into account		P
	Adhesive backing durable, meets requirements of UL 969 or...	UL file nr. MH46613	P
	... withstands specified tests	The adhesive backing is certified to UL 969 under the conditions of occasional exposure to oil, humidity and water, and appropriate for the surface to which it is applied, is deemed to fulfil with the following tests.	N/A
8.13	Thermal link or fuse-link, reference number or other means for identifying the link marked		N/A
8.14	Instruction manual and safety instructions: - are provided together with the tool		P
	- are noticed by the user when the tool is removed from the packaging		P
	- include an explanation of the symbols		P
	- are written in the official language(s) of the country in which the tool is sold..... :	English	P
	- are legible and contrast with the background.		P
	- include business name and address of the manufacturer and, where applicable, his authorised representative..... :		P
M	- include the designation of the tool and series or type as required by 8.3, including description of machine such as "grinder", "polisher" etc. :	Straight Grinder	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
8.14.1	Safety instructions in English are verbatim and in any other official language are equivalent	English	P
	The general power tool safety warnings may be separate from the instruction manual.		N/A
	Format of all Safety Warnings differentiate the context of all clauses by font or similar means and as illustrated in 8.14.1.1		P
8.14.1.1	General Power Tool Safety Warnings		P
	1) Work Area Safety		P
	2) Electrical Safety		P
	3) Personal Safety		P
	4) Power Tool Use and Care		P
	5) Service		P
8.14.1.101.1	Additional safety instructions as specified in 8.14.1.101 are given		P
	Additional safety instructions printed together with or separately from the "General Power Tool Safety Warnings"	Together with	P
	Terms consistently used		P
8.14.1.101.2	Safety warnings common for grinding, sanding, wire brushing, polishing or cutting-off operations complete		P
8.14.1.101.3	Kickback and related warnings complete		P
8.14.1.101.4	Additional safety instructions for grinding and cutting-off operations complete		P
8.14.1.101.5	Additional safety instructions for cutting-off operations complete		N/A
8.14.1.101.6	Additional safety instructions for sanding operations complete		N/A
8.14.1.101.7	Additional safety instructions for polishing operations complete		P
8.14.1.101.8	Additional safety instructions for wire brushing operations complete		N/A
8.14.1.2	Order of the Safety Instructions in accordance with A): Part 1 warnings are followed by the relevant part of IEC 62841-2-3 warnings, or ...		P
	M ... order of the Safety Instructions in accordance with B): IEC 62841-1 warnings and IEC 62841-2-3 warnings divided into the sections defined by the numbered subtitles and the associated warnings below the numbered subtitle		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
M	Format of instruction manual section titles for IEC 62841-2-3 warnings		N/A
M	C): Any additional warnings deemed necessary by the manufacturer, not inserted within any of the IEC 62841-2-3 warnings		P
8.14.1.3	Instruction manual and safety instructions in one common document, or		P
	Warning as specified included in manual		N/A
8.14.2	Additional instructions and information		P
	a) Instructions for putting into use		P
101) A	Instruction on types of accessories and guards to be used for the intended applications of the tool		P
102) A	Flanges for combined grinding and cutting-off abrasive flange mounted wheels, instruction to only use either a Type A Type C wheel guard		N/A
103) A	Information on the risks associated with using incorrect guards		P
104) A	Information about the permitted thickness and diameter of grinding wheels		P
105) A	Information about the maximum thickness and diameter of wheel-type wire brushes		P
106) A	Information about the permitted construction of cutting-off wheels (diamond or bonded reinforced), wheel diameter and wheel thickness.		N/A
A	Instruction that for diamond segmented wheels, maximum peripheral gap between segments is 10 mm, only with a negative rake angle		N/A
	b) Operating instructions		P
101) A	Instruction on the proper use of blotters, when provided with the bonded abrasive product;		N/A
102) A	Information about the flanges to be used with all wheel types		P
A	Instruction on the mounting of accessories and the use of the correct flanges		P
A	For reversible flanges, instruction on the correct method of fitting the flanges		N/A
103) A	Instruction on proper use of all accessories		P
A	For grinding and cut-off wheels, instruction on their use for side grinding and peripheral grinding applications		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	For Type 27 and 28 wheels, the recommended angle to the work surface		N/A
104) A	Instruction for mounting and securing of the wheel guard identifying allowable adjustments to ensure maximum protection of the operator;		P
105) A	Instruction on proper support for the workpiece		P
106) A	For cup-wheels, cones or plugs with a threaded hole intended to be mounted on the machine spindle, information about critical dimensions and other data in order to prevent the spindle end from touching the bottom of the mounting hole of the abrasive product		N/A
107) A	For disc-type sanders exclusively intended for sanding wooden floors, instruction how to connect the external dust collection equipment, where applicable		P
108) A	For grinders intended to be used with a Type E or Type F wheel guard, instruction how to connect the external dust collection equipment, where applicable		P
	c) Maintenance and servicing instructions		P
101) A	Instruction on storage and handling of specified accessories		P
	d) Warnings and instructions for tools with a liquid system		N/A
8.14.3	Information about the mass or weight of the tool, if any, is the mass specified in 5.17.		P
9	PROTECTION AGAINST ACCESS TO LIVE PARTS		
9.1	Tools so constructed and enclosed that there is adequate protection against accidental contact with live parts, even after removal of detachable parts and soft materials		P
9.2	Accessible part not considered live if it is:		N/A
	- supplied with SELV		N/A
	- or separated from live parts by protective impedance, d.c. current not exceeding 2 mA		N/A
	- or separated from live parts by protective impedance, a.c. peak value not exceeding 0.7 mA		N/A
	- for peak value 42.4 V up to and including 450 V capacitance not exceeding 0.1 μ F		N/A
	- for peak value 450 V up to and including 15 kV discharge not exceeding 45 μ F		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
9.3	Lamps located behind a detachable cover are not removed		N/A
	Protection against contact with live parts of the lamp cap ensured during insertion or removal of lamps located behind a detachable cover		N/A
	Test probe B of IEC 61032:1997 applied with a force of ≤ 5 N		P
	Opening does not allow entry of test probe B of IEC 61032:1997, rigid test probe applied with a force of 20 N		P
	Test with probe B of IEC 61032:1997 repeated		P
	Test probe does not touch live parts or live parts protected only by lacquer, enamel, ordinary paper, cotton, oxide film, beads or sealing compound		P
9.4	Test probe 13 of IEC 61032:1997 applied with a force ≤ 5 N through openings in class II tools and class II constructions		P
	Exception: openings giving access to lamp caps and live parts in socket-outlets		N/A
	Test probe is also applied through openings in earthed metal enclosures having a non-conductive coating such as enamel or lacquer.		N/A
	Not be possible to touch live parts with the test probe		P
9.5	Class II tools and class II constructions, adequate protection against accidental contact with basic insulation and metal parts separated from live parts by basic insulation only		P
	Parts not separated from live parts by double or reinforced insulation are not accessible		P
	Probe B of IEC 61032:1997 cannot contact basic insulation through openings in Class II tools or Class II constructions		P
10	STARTING		
10.1	Motors start under normal voltage conditions		P
	Starting ten times at 0.85 times rated voltage without load (V)	93,5 V	P
	Starting ten times at 1.1 times rated voltage without load (V)	264 V	P
	Tool operated and overload protection devices incorporated in the tool did not activate.		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Centrifugal and other automatic starting switches operate reliably and without contact chattering		N/A
10.2	Input current drawn at (2,0 ±0,2) s after starting does not exceed 30 A...	< 30 A	P
	... or 4 times the rated current of the tool		N/A
11	INPUT AND CURRENT		
	Marked power input or current is at least 110% of measured no-load input or current	See Table 11	P
	Tool marked with more than one rated voltage, test made at each rated voltage		N/A
	Tools marked with one or more rated voltage ranges, test made at both the upper and lower limits of the ranges	110-120 V 220-240 V	P
	Marking of the rated input is related to the mean value of the relevant voltage range, test is made at a voltage equal to the mean value of that range.....		N/A
12	HEATING		
12.1	No excessive temperatures attained at rated input or rated current		P
	Temperature rise determined according to Clauses 12.2 to 12.5		P
	Test of Clause C.3 at 1,06 times the rated voltage under heated conditions	See Table C.3A	P
12.2	Tool is operated at each rated voltage; load conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 0,94 times and 1,06 times the rated voltage		N/A
	Tool with a rated voltage range is operated at - the lower limit of the rated voltage range; conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 0,94 times the lower limit of the rated voltage range - the upper limit of the rated voltage range; conditions as specified in 12.2.1; torque applied is measured and maintained; voltage is then adjusted to 1,06 times the upper limit of the rated voltage range		P
	Temperatures are measured at the most unfavourable of the voltage settings used		P
	Temperatures measured by means of thermocouples are taken while the tool is operating		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
12.2.1	Loading conditions during temperature test.....:	See Table 12.1	P
	Tool without inherent operating cycle is operated with a torque load to draw rated input or rated current until thermal equilibrium is reached		P
	Tool with an inherent operating cycle is operated with a torque load to draw rated input or rated current during each operating cycle; tool was cycled consecutively for 30 min		N/A
12.3.1	Heating elements, if any, are operated under the conditions specified in Clause 11 of IEC 60335-1:2010; tool was operated at 1,06 times the rated voltage		N/A
12.3.2	Tool provided with automatic cord reel, one third of the total length of the cord was unreeled		N/A
12.3.2	Temperature rise was determined near to the hub of the reel and between the two outermost layers of the cord on the reel		N/A
	Cord storage devices, other than automatic cord reels, intended to accommodate the supply cord partially while the tool is in operation, 50 cm of the cord is unwound		N/A
	The temperature rise of the stored part of the cord is determined at the most unfavourable place.		N/A
12.4	Temperature rises, other than those of windings, determined using thermocouples chosen and positioned to have the minimum effect on the temperature of the part tested		P
	Temperature rise of electrical insulation, other than windings, measured on surface of insulation		P
	When possible, temperature rises of windings determined by resistance method		P
	For handles, knobs, grips and the like, all parts considered which are gripped in normal use, and, if of insulating material, to those parts in contact with hot metal		P
12.5	Temperature rises did not exceed values in Tables 1a and 1b, except as allowed by 12.6		P
	Protective devices did not operate		N/A
	Sealing compounds did not flow		P
12.6	When winding temperatures exceeded values in Table 1, three additional samples successfully subjected to following tests:		N/A
	a) Heat treatment for 240 h at the specified cabinet temperature (°C):		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	b) No interturn short circuit after oven treatment		N/A
	c) Humidity treatment in accordance with 14.1		N/A
	d) Tests of Annex D	See Table D.2	N/A
13	RESISTANCE TO HEAT AND FIRE		
13.1	Relevant parts sufficiently resistant to distortion due to heat		P
	Parts of thermoplastic material: - provided as enclosure to comply with Clause 9, - supporting current carrying parts, - providing supplementary or reinforced insulation, sufficiently resistant to distortion due to heat		P
	Relevant parts subjected to ball-pressure test acc. to IEC 60695-10-2	See Table 13.1	P
13.2	Part of non-metallic material, except as listed in this clause, resistant to ignition and spread of fire		P
	Parts of non-metallic material other than - material classified at least HB40 per IEC 60695-11-10:2013, provided test sample not thicker than relevant part, - material with a glow wire ignition temperature of at least 575 °C per IEC 60695-2-13:2010, provided that the test sample was no thicker than the relevant part, comply with glow-wire test of IEC 60695-2-11:2000 at 550 °C	See Table 13.2	P
	Soft, foamy, and similar materials which cannot be subjected to glow wire test complies with ISO 9772:2012 for category HBF material with test sample not thicker than relevant part		N/A
14	MOISTURE RESISTANCE		
14.1	Tools are proof against likely humid conditions		P
	Tool subjected to humidity treatment test for 48 h		P
	Relative humidity (93 ± 2) %.....	93 %	P
	Temperature (20...30 °C) maintained at ± 1K.....	25 °C	P
	Samples pre-conditioned to between t and t + 4 °C:		P
	No excessive leakage after humidity treatment.....	See Table C.2A	P
	No flashover or breakdown occurred during test of Annex D after humidity treatment.....	See Table D.2	P
	No flashover or breakdown occurred during additional test of D.2 between accessible metal parts and supply cord wrapped with metal foil	See Table D.2	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
14.2	Degree of protection for tool enclosure according to tool classification (IP Code)		N/A
14.2.1	Tool not connected to the supply and turned continuously through most unfavourable positions		N/A
	Removable parts are removed and subjected to the relevant treatment with the main part.....		N/A
14.2.2	Tool rated IPX1 through IPX7 subjected to applicable tests of IEC 60529:2013		N/A
	For IPX7 test, tool immersed in water containing 1,0 % NaCl		N/A
	Tool withstood electric strength test of Annex D after moisture treatment	See Table D.2	N/A
	No trace of water on insulation causing reduction of creepage and clearance below values in 28.1		N/A
14.3	No increased risk of electrical shock from liquid systems or spillage of liquid		N/A
	Residual current device is disabled		N/A
	Removable parts, except those fulfilling the test of 21.22., are removed		N/A
	Tool prepared as described in 8.14.2		N/A
	Liquid container filled, then 15% or 0,25 l added.....		N/A
	Detachable liquid container mounted and dismantled 10 times		N/A
	No excessive leakage.....	See Table C.3B	N/A
	No flashover or breakdown occurred during test of D.2 between live parts and accessible parts after drying for 24 h at ambient temperature.....	See Table D.2A	N/A
14.4	No increased risk of electrical shock from liquid systems under pressure during operation		N/A
	Residual current device is disabled		N/A
	Liquid system is subject to a hydrostatic pressure equal to twice the pressure stated in 8.14.2 d) 1) is applied for 1 h with 1,0 % NaCl solution		N/A
	Tool did not exceed maximum allowable leakage current during pressure application	See Table C.2B	N/A
	No flashover or breakdown occurred during test of D.2 between live parts and accessible parts after drying for 24 h at ambient temperature.....	See Table D.2	N/A
14.5	Residual current devices complied with IEC 61540:1999 and met requirements a) to c)		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	a) RCD disconnected only both mains conductors when leakage exceeded 10 mA with a maximum response of 300 ms		N/A
	Test conducted according to 9.9.2 of IEC 61540:1999, and earthing conductor stayed connected		N/A
	b) RCD operated correctly for all 50 cycles		N/A
	c) RCD cannot be removed during use or routine normal maintenance (i.e., residual current device fixed to tool or power supply cord connected to tool)		N/A
	RCD fitted in supply cord provided with Type Y or Z attachment for connection to supply cord and interconnection cord		N/A
15 RESISTANCE TO RUSTING			
15.1	Ferrous parts adequately protected against rusting		N/A
	Parts used to conduct electricity subjected to test.. :		—
M	Any mechanical parts mechanical parts subjected to test..... :		—
	All grease removed from the parts to be tested by immersing them in a degreasing agent for 10 min		N/A
	Parts were immersed for 10 min in a 10 % solution of ammonium chloride in water at $(20 \pm 5) ^\circ\text{C}$		N/A
	Without drying, all drops shaken off, and parts placed for 10 min in a box containing air saturated with moisture at $(20 \pm 5) ^\circ\text{C}$		N/A
	After parts dried for 10 min in a heating cabinet at $(100 \pm 5) ^\circ\text{C}$, no evidence of rust on surfaces		N/A
	Small helical springs and the like and parts exposed to abrasion covered by a layer of grease		N/A
16 OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS			
16.1	No excessive temperatures occurred during short circuit in transformer or circuits associated with it for a tool supplied from a transformer..... :	See Table 16.1	N/A
	Insulation on conductors of SELV circuits was within 15 K of Table 1		N/A
	Temperature of transformer windings did not exceed values in Table 3		N/A
	Transformer complies with IEC 61558-1		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Power limited by (short-circuit protective device) ...:		—
17	ENDURANCE		
17.1	Construction prevents electrical or mechanical failures that might impair compliance with this standard.		P
	Insulation not damaged		P
	Connections did not work loose		P
	Overload protection devices did not activate		
	No flashover or breakdown occurred during test of Annex D, test voltages reduced to 75 per cent, after tests of 17.2 and 17.3	See Table D.2	P
17.2	No load intermittent operation (2 x 24 h) for hand-held tools		P
	Test voltage at each operation (V)	198 V / 264 V 99 V / 132 V	—
	Rate of operation (100s "on", 20s "off").....	100 s "on", 20 s "off"	—
	Three test positions selected for hand-held tools ...:	Horizontal; Vertically up; Vertically down	—
	Operation time for each position		—
	Servicing of carbon brushes and lubricant.....		N/A
	Replacement of parts due to mechanical failure		N/A
	Forced cooling or rest periods if temperature exceeded values in Table 1.....		N/A
	No operation of overload protection devices		N/A
17.3	Tools with Centrifugal switches operated for 10,000 cycles		N/A
	Number of operations under normal load		N/A
	Rate of operations (s "on", s "off")		N/A
	Test voltage 0.9 x rated Voltage (V).....		N/A
18	ABNORMAL OPERATION		
18.1	Risk of fire and mechanical damage impairing - safety and - the protection against electric shock as a result of abnormal operation is obviated as far as is practicable.		P
18.1.1	Tool did not emit flames or molten metal		P
	Compliance with Clause 9 maintained		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	No flashover or breakdown occurred during test of Annex D between live parts and accessible parts after tests of clause 18	See Table D.2	P
	Tool still operable and continues to comply with 19.1 but without repeating the tests of Clause 20		P
18.2	Fuses, thermal cut-outs, overcurrent protection devices used to provide the necessary protection		N/A
	Electronic circuits relied upon for protection evaluated for this safety critical function as in clause 18.8.		N/A
18.3	Tool with series motor operated without accessories at no load for 1 min at 1,3 times rated voltage, or upper limit of voltage range (V)	312 Vac for 220-240 V; 156 Vac for 110-120 V	—
	No parts were ejected from the tool		P
	Speed limiting device operated		—
18.4	Tools with multiphase motor tested, started from cold, with one phase disconnected, and under the torque produced while operated at rated voltage or the mean value of the rated voltage range with rated input or rated current - for 30 s tests for tool kept switched on by hand or continuously loaded by hand - for 5 min test for other tools.....		N/A
	30 s tests for tool kept switched on by hand or continuously loaded by hand		N/A
	5 min test for other tools		N/A
	After the test, or at the instant of operation of fuses, thermal cut-outs, motor protection devices and the like, the temperature of the windings complied with the limits in Table 3		N/A
	Max winding temperature recorded (°C)		—
18.5	Class I tool with class II construction and class II tool subjected to running overload conditions		P
	Tools with series motor, test of 18.5.1		P
	Class I tool with class II armature test of 18.5.2 instead of 18.5.1		N/A
	Tool with electronically commutated stator windings, test 18.5.4		N/A
	Tool with other motor, test of 18.5.3		N/A
	Lawn and garden machinery, test as specified in relevant part of IEC 62841-4	Hand-held	N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
18.5.1	All fuses, thermal cut-outs, overload protectors and the like that are accessible or can be reset by the user without the aid of a tool and any self-resetting protective devices were shorted		P
	Functions of electronic circuits that prevent the tool from operating at 160 % rated current disabled		N/A
	Functions of electronic circuits that prevent the tool from operating at 160 % rated evaluated as safety critical functions as in 18.8.		N/A
	Test circuit minimum 12 kVA	12 kVA	P
	Leakage current between live parts and accessible parts measured as in Clause C.3 did not exceed 2 mA throughout the test and until stabilization afterwards.....	See Table C.3C	P
	Tool operated for 15 min, or until the tool open-circuited, or flame appeared	Open-circuited	P
	160% rated test current (A)	18,40 A; 10,46 A	—
	Tool operated at rated voltage (V)	120 V; 240 V	—
	Overload condition existed for (_min, _sec)	2 sec	—
	Condition continued until the tool open-circuited, or flame appeared or 15 minutes expired	Open-circuited	P
	Elements that opened in case an open circuit occurred	Protective electronic circuit operated	P
	When flames appeared, extinguished by CO ₂ extinguisher		N/A
	Tool did not operate after 15 min, cooled to ambient temperature and subjected to test of D.2 at 1500 V between live parts and accessible parts	See Table D.2	N/A
	Tool still operated after 15 min, cooled to ambient temperature and subjected to test of D.2 at 2500 V between live parts and accessible parts	See Table D.2	P
	Tool permanently open-circuited due to over temperature condition (except opening of a motor winding), test repeated.		N/A
	Non-self-resetting thermal limit function of an electronic circuit bypassed or evaluated as a safety critical function in 18.8.		N/A
	Tool permanently open-circuited for reasons other than above, the cause is determined and bypassed in a new sample, test repeated		N/A
18.5.2	Test circuit minimum 12 kVA applied to armature ..		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Leakage current between commutator segments and the armature shaft measured did not exceed 2 mA throughout the test and until stabilization afterwards.....:		N/A
	1,06 times rated voltage (V) applied between opposite commutator segments		—
	160% rated test current (A)		—
	Current applied for 15 min, or until the armature open-circuited, or flame appeared		N/A
	When flames appeared, extinguished by CO ₂ extinguisher		N/A
	Armature cooled to ambient temperature and subjected to test of D.2 at 1500 V between commutator segments and the armature shaft	See Table D.2	N/A
18.5.3	Test circuit minimum 12 kVA.....:		N/A
	Tool stalled, capacitors in circuit of auxiliary windings are open-circuited		N/A
	Test repeated with capacitors short-circuited one at a time unless they are of class P2 of IEC 60252-1		N/A
	Operated at rated voltage (V).....:		—
	Test duration (min, s).....:		—
	Temperature of the windings did not exceed the relevant value specified in Table 3		N/A
	Conditions of 18.1.1 fulfilled		N/A
18.5.4	Motors with electronically commutated stator windings, all possible static faults of the outputs of the motor drive circuitry considered		N/A
	Protective function prevent these faults evaluated as an SCF according to 18.8 with minimum PL = a		N/A
	All fuses, thermal cut-outs, overload protectors and the like that are accessible or can be reset by the user without the aid of a tool and any self-resetting protective devices were shorted		N/A
	Leakage current between live parts and accessible parts measured as in Clause C.3 did not exceed 2 mA throughout the test and until stabilization afterwards.....:	See Table C.3D	N/A
	Voltage applied for 15 min, or until the armature open-circuited, or flame appeared		N/A
	Source voltage of the motor drive circuitry.....:		N/A
	When flames appeared, extinguished by CO ₂ extinguisher		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Any motor windings open-circuited after 15 min, motor cooled to ambient temperature and subjected to test of D.2 at 1500 V between live parts and accessible parts	See Table D.2	N/A
	No motor windings open-circuited after 15 min, motor cooled to ambient temperature and subjected to test of D.2 at 2500 V between live parts and accessible parts	See Table D.2	N/A
18.6	No hazards from electric shock, fire or accessible moving parts occurred under fault conditions of 18.6.1		P
	Tool operated at rated voltage (V)	115 V; 230 V	—
	No charring or burning of the gauze or tissue paper occurred		P
	Protection against electric shock as in Clause 9 maintained		N/A
	Protection against accessibility to moving parts as in 19.1 maintained		N/A
	Evaluation not performed for low power circuits as in Annex H if no SCF can be lost		N/A
	Circuit encapsulated with an insulating material with a minimum thickness of 0,5 mm and no SCF can be lost, circuit evaluated by open-circuiting and short-circuiting within the encapsulated circuit		P
	Fuses, thermal cut-outs, thermal links, temperature limiters, electronic devices or any components or conductors operated, and		N/A
	– test repeated twice, using two more samples; or		N/A
	– tool withstands test of 18.6.1 with the fuse, thermal cut-out or thermal link bridged; or		N/A
	–miniature fuse link complying with IEC 60127 operates and tool withstands test of 18.6.2		N/A
	Tool withstood the particular test as a conductor of a PCB open-circuited, and		N/A
	– creepage or clearances between live parts and accessible metal parts not reduced below values in 28 due to loosened conductors, and		N/A
	– tool withstood repeated tests with the open-circuited conductor bridged, or		N/A
	– test repeated twice, using two more samples		N/A
18.6.1	Fault conditions a) to f) conducted as applicable	See Table 18.6.1	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
18.6.2	Tests repeated with fuse-link replaced by an ammeter when during fault conditions of 18.6.1, safety of the tool depended on operation of a miniature fuse-link complying with IEC 60127-3,		N/A
	– Circuit not considered to be adequately protected when current measured was ≤ 2.1 times the rated current of fuse-link, and test conducted with fuse-link short-circuited (A).....:		N/A
	– Circuit considered adequately protected when current measured was ≥ 2.75 times the rated current of fuse-link (A).....:		N/A
	– Fuse-link short-circuited when current measured was 2.1-2.75 times the rated current of fuse-link, and test conducted as follows (A).....:		N/A
18.7	Switches and devices for motor reversal withstood stresses occurring when rotation reversed 25 times under running conditions at rated voltage at no-load (V).....:		N/A
18.8	Electronic circuits providing safety critical functions (SCF)		—
18.8.1	Electronic circuits providing SCF are reliable and not susceptible to loss of SCF due to electro-magnetic environmental stresses	See report 6138614.51QS	P
	No SCF lost after tests of 18.8.2 to 18.8.6 for circuits with no internal clock frequency or oscillator frequency > 15 MHz		N/A
	No SCF lost after tests of 18.8.2 to 18.8.7 for other electronic circuits		P
	Test voltage was rated voltage or the mean value of the rated voltage range.....:	110-120 Vac; 220-240 Vac	P
	Difference between upper and lower limit of rated voltage range > 20 % of its mean value, test at both upper and lower limits of the rated voltage range...:		N/A
	After evaluation using 18.6.1, no loss of any SCF or tool in a safe state under any present fault condition.		P
	Concept of 18.6.1 not appropriate, reliability evaluated using ISO 13849-1.	See report 6138614.51QS	P
	Required performance levels.....:	See Table 18.8.1A	P
	If only $MTTF_d$ is applied to achieve the required PL: $MTTF_d$ is 5/20/50 years for PL = a/b/c		P
	Software used in circuits of programmable devices whose failure would create loss of safety critical function, complied with software class B requirements as in H.11.12.3 of IEC 60730-1:2010	See Table 18.8.1B	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	In the case where software class B is realized by single channel with periodic self-test, an acceptable period is regarded as either after each activation of the power switch or a maximum of 5 min.		P
	Class B realized by single channel, periodic self-test either after each activation of the power switch or at least every maximum 5 min		P
	H.11.12.3.4.1 applicable for SCF with a PL \geq c		P
18.8.2	Electrostatic discharges as in IEC 61000-4-2:2008 applied to tool, test level 4 used for air discharge and test level 3 for contact discharge, ten / ten discharges having a positive / negative polarity applied		P
18.8.3	Fast transient bursts as in IEC 61000-4-4:2012 applied to tool, test level 3 used. Repetition frequency 5 kHz for 2 min / 2 min with a positive / negative polarity		P
18.8.4	Voltage surges as in IEC 61000-4-5:2005 applied to power supply terminals, five positive impulses and five negative impulses applied at the selected points		P
	Test level 3 applied for line-to-line coupling mode, a generator with 2 Ω source impedance being		P
	Test level 4 applied for line-to-earth coupling mode, a generator with 12 Ω source impedance being		P
	Tools has surge arresters incorporating spark gaps, test was repeated at 95 % of the flashover voltage		P
18.8.5	Injected currents as in IEC 61000-4-6:2008 applied to tool, test level 3 applicable, all frequencies between 0,15 MHz to 230 MHz covered		P
18.8.6	Class 3 voltage dips and interruptions in accordance with IEC 61000-4-11:2004 applied to tool		P
	Values of Tables 1 and 2 of IEC 61000-4-11:2004 were applied at zero crossing of the supply voltage		P
18.8.7	Radiated fields in accordance with IEC 61000-4-3:2010 applied to tool, test level 3 applicable		N/A
	Frequency ranges 80 MHz to 1 000 MHz tested		N/A
19	MECHANICAL HAZARDS		
19.1	R	Adequate protection against injury provided against moving and other dangerous parts other than the spindle, the accessory and the flanges	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
R	Protective enclosures, covers, guards and the like have adequate mechanical strength and, except for the wheel guard, cannot be removed without the aid of a tool		P
	Adjustable guard used as protection of the working element has easily accessible means of accurate adjustment		P
	No dangers from adjusting the guards		P
	No contact with dangerous moving parts using probe B of IEC 61032:1997, test force $\leq 5N$		P
	Any soft materials removed prior to the test		P
19.2	No hazardous ragged or sharp edges, other than necessary for the functioning of the tool		P
19.3	No contact with dangerous moving parts through dust collection openings, using probe B of IEC 61032:1997, test force $\leq 5N$		N/A
A	19.3 not applicable for the dust collection ports on wheel guards		N/A
19.4	Hand-held tool has at least one handle or grasping surface for safe handling during use		P
A	Tool with rated capacity > 100 mm shall has at least two handles; one of the handles may be the body of the tool if suitably shaped	150 mm	P
19.5	Tool allows visual check of the contact of cutting tool with workpiece		P
R	For grinders and disc-type sanders, no-load speed of the spindle did not exceed the rated no-load speed after operating for 5 min at no-load; accessory in accordance with that produces the maximum speed was installed	4766 min ⁻¹	P
R	For disc-type polishers, no-load speed of the spindle did not exceed 110 % of the rated no-load speed after operating for 5 min at no-load; separable accessories not mounted		N/A
19.9	Fixed guards to be removed to convert the tool or to change the accessory, fastenings remains attached to the guard or to the machinery	Not fixed guard	N/A
	Fastening not completely removed and considered as still attached		N/A
19.101.1 A	Wheel Guard as specified in Annex AA provided to protect the user during operation unless exempted in 19.101.2		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	Wheel guard, if removable, then either with the aid of a tool or by requiring two separate and dissimilar actions	With the aid of tool	P
A	Wheel facilitates the change of the abrasive wheel without the need to remove the wheel guard, except for Type F wheel guards		P
A	Wheel guard is designed to minimize the risk of an accidental contact between the operator and the wheel e.g. by a possibility of adjustment		P
A	Maximum clearance between the inside of the wheel guard and periphery of a new abrasive product of rated capacity is in at least one location – 8 mm for wheel guards of Type A, B, C or G for tools with a rated capacity not exceeding 130 mm, – 10 mm for wheel guards of Type A, B, C or G for tools with a rated capacity exceeding 130 mm; – 11 mm for wheel guards of Type D.....	Ø 150 mm, 7,0 mm	P
19.101.2 A	Grinder with a rated capacity ≤ 55 mm, disc-type sanders and disc-type polishers need not be supplied with a wheel guard		N/A
A	Angle grinder with a rated capacity > 55 mm is supplied with either – both a wheel guard of Type A and of Type B; or – a wheel guard of Type B and additional elements that are to be fixed to it to convert it into Type A ; or – a wheel guard of Type C		N/A
A	Straight grinder with a rated capacity > 55 mm is supplied with a Type G wheel guard		P
A	Tools with a rated capacity > 55 mm, wheel guards as specified in Table 101 for the intended applications and accessory types – are supplied with the tool for any accessory type supplied with the tool; and – be available from the manufacturer and be listed in the instructions; and – comply with all applicable requirements of 19.101, Clause 20 and Annex AA		P
A	Guard types supplied.....	Type G guard	P
19.102 A	Spindle designed to provide for or aid in securing and driving the abrasive products designed for the tool		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	Direction of spindle threads or design of an equivalent securing means such that any clamping device or wheel with threaded hole tends to tighten during working, or the outer flange shall have positive locking to the spindle.		P
A	Direction of spindle threads or design of an equivalent securing means such that any clamping device or wheel with threaded hole tends to tighten during working, or the outer flange has positive locking to the spindle		P
A	Eccentricity of the spindle < 0,1 mm	0,03	P
A	If flange or similar clamping and locating device used, total eccentricity of the combination – 0,30 mm for rated no-load speed < 15 000 min ⁻¹ . – 0,15 mm for rated no-load speeds ≥ 15 000 min ⁻¹ and < 25 000 min ⁻¹ . – 0,10 mm for rated no-load speeds ≥ 25 000 min ⁻¹	0,30 mm, 4800 min ⁻¹	P
A	Total eccentricity measured.....	0,20 mm	P
19.103	Tool is designed so as to prevent the abrasive product coming loose under normal use.		P
A	Grinder provided with inner flange(s) and outer flange(s) for mounting the type of grinding wheels intended to be used with the wheel guard(s) supplied		P
A	Flanges not required to be provided tool only accepts wheels with a non-reusable plate mount or other non-threaded mounting affixed to the wheel		N/A
19.104.1	Flanges designed to secure and locate the abrasive products to the grinder; at least one of the flanges is keyed, screwed, shrunk-on or otherwise secured to prevent rotation relative to the tool spindle	Screw type flange	P
A	Flanges are flat and have no sharp edges		P
A	Flanges have dimensions specified in 19.104.2 and 19.104.3 as illustrated in Figure 105 for wheels other than Type 4		N/A
A	Flanges have dimensions specified in 19.104.4 as illustrated in Figure 106 for wheels of Type 4		N/A
A	Flanges for wheels under 55 mm diameter may be unrecessed (G = 0)		N/A
A	Flanges for wheels with threaded inserts or projecting studs are unrecessed (G = 0)		N/A
A	Inner flange and outer flange have the same diameter D_f or ...		P
	... overlap of inner and outer flange bearing surfaces at least dimension C		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	Outer flange and/or nut does not extend beyond the plane defined by the lip of the wheel guard when mounted with the thickest Type 27, 28 or 29 wheel as specified		N/A
19.104.2 A	Flange diameter for wheel type 1 thicker than 5 mm is $D_f \geq 0,33D$:		N/A
A	Flange diameter for wheel type 1 that are 5 mm or thinner and wheel types 6, 11, 27, 28, 29, 41 and 42 is $D_f \geq (20 \pm 1)$ mm - for $55 \text{ mm} \leq D < 80 \text{ mm}$ or - and for $80 \text{ mm} \leq D \leq 105 \text{ mm}$ for wheels with a bore diameter of 10 mm (3/8 inch UNC)		N/A
A	Flange diameter for wheel type 1 that are 5 mm or thinner and wheel types 6, 11, 27, 28, 29, 41 and 42 is $D_f \geq (29 \pm 1)$ mm - for $80 \text{ mm} \leq D \leq 105 \text{ mm}$ for wheels with a bore diameter of 10 mm (3/8 inch UNC)		N/A
A	Flange diameter for wheel type 1 that are 5 mm or thinner and wheel types 6, 11, 27, 28, 29, 41 and 42 is $D_f \geq (41 \pm 1)$ mm - for $105 \text{ mm} < D \leq 230 \text{ mm}$	$D_f = 49,5 \text{ mm}$	P
A	For wheel type 41 and diamond wheels, D_f may exceed the above values for inner flanges and outer flanges		N/A
A	For all other wheel types, the D_f may exceed the above values for inner flanges only		N/A
A	If the clamping surface of the outer flange is chamfered, bevel angle is at least 45° and the non-clamping surface outside diameter of the flange may be increased by max. 4 mm		P
19.104.3 A	Flange dimensions as per Figure 105 are - $C \geq 3 \text{ mm}$ - $W \geq 1 \text{ mm}$, $G \geq 0,5 \text{ mm}$ for $D_f < 50 \text{ mm}$ - $W \geq 1,5 \text{ mm}$, $G \geq 1,0 \text{ mm}$ for $D_f \geq 50 \text{ mm}$	$C = 6,51 \text{ mm}$ $W = 13,68 \text{ mm}$ $G = 1,47 \text{ mm}$	P
19.104.4 A	Flange as per Figure 106 and have dimensions D_f , C and G in accordance with Table 102		
19.105 A	Flanges required by 19.103 designed so that they are of adequate strength		P
	Torques for testing flanges (Nm).....:	First test torque: 11 Nm, Second test torque: 45 Nm	P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
20	MECHANICAL STRENGTH		
20.1	Adequate mechanical strength to withstand rough handling		P
	No flashover or breakdown occurred during test of Annex D between live parts and accessible parts after tests of clause 20.2-20.4	See Table D.2	P
	No live parts became accessible		P
	No creepage distances or clearances below the values of 28.1		P
R	Deformation of a wheel guard is acceptable		N/A
R	If there is any mechanical damage to other parts of the tool that is likely to compromise compliance with a relevant requirement of Clause 19, the requirement in Clause 19 shall be re-evaluated.		N/A
R	Any mechanical damage to other parts of the tool that is likely to compromise compliance with a relevant requirement of Clause 19, requirement in Clause 19 re-evaluated.....:		N/A
	Inner cover withstood test after removal of the decorative cover		N/A
20.2	Three blows applied to every weak point of enclosure by spring-operated impact test apparatus in Clause 5 of IEC 60068-2-75:1997		P
	Brush cap impact energy (Nm).....:	-	—
	Other part impact energy (Nm).....:	1,0 Nm	—
	Blows applied each point of the enclosure likely to be weak	Air intake, motor housing, handle	P
	Blows applied to guards, covers, handles, levers, knobs and the like as necessary	Guard, switch knobs	P
20.3	Test of 20.3.1, 20.3.2 or the relevant part of IEC 62841-4 applied, as applicable		P
20.3.1	Hand-held tool withstood impact of 3 varied drops on a concrete surface from 1 m		P
	Separable accessories were not mounted		P
	Any attachments provided as specified in instructions, test repeated with each attachment or combination of attachments mounted to a separate tool sample		P
20.4	Adequate mechanical strength of brush holder and their caps		N/A
	Brush cap removed and replace 10 times applying specified tightening torque		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Tightening torque (Nm).....:		—
	No damage to brush holders impairing its further use, thread not damaged, cap shows no cracks		N/A
20.5 M	Handles and grasping surfaces have adequate mechanical strength to provide insulation between grasping area and output shaft (not applicable for disc-type polishers and disc-type sanders not intended to be used as a grinder as specified in the instructions)		P
	A separate sample subjected to a single impact from 1m onto a concrete surface on each handle and each recommended grasping surface		P
20.101 A	Strength of wheel guards of Types A, B, C and D		—
20.101.1 A	Wheel guards have sufficient mechanical strength to prevent the wheel fragments from being ejected towards the operator in the event of the wheel breakage		N/A
	A Three samples of any recommended guard subjected to test in cl. 20.101.2 to 20.101.5		N/A
	A Test conducted with the thickest bonded reinforced wheel that may be used with the wheel guard in accordance with 8.14.2 a) 101)		N/A
	A Acceptance criteria of 20.101.6 are met		N/A
	A For wheel guards intended only for diamond wheels or flap discs, compliance checked either by – the test of 20.102.2 to 20.102.5, using bonded reinforced wheels $\geq 2,5$ mm thick and with a diameter approximately equal to the diameter of the diamond wheels or flap discs in accordance with 8.14.2 a) 101) and the acceptance criteria of 20.102.6; or		N/A
	A – meeting the design requirements in Table 105		N/A
20.101.2 A	Guard is securely mounted and fixed to the grinder in accordance with the instructions of 8.14.2 b) 104)		N/A
	A Adjustable guard positioned as specified (Figs. 107 a and 107 b)		N/A
	A Axial adjustment for Type D guards such that the lower edge of the wheel guard extends beyond the grinding surface of the wheel by $\leq 1,0$ mm.		N/A
	A Grinding wheel with maximum thickness in accordance with 8.14.2 a) 104) and a diameter equal to the rated capacity of the grinder is notched into four quadrants with a notch width of $\leq 2,5$ mm		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	The notched grinding wheel is mounted to the spindle with any mounting means that will allow for the centrifugal forces to cause the wheel to disintegrate at a speed $\geq 90\%$ of the rated no-load speed of the grinder		N/A
20.101.3	Pre-cut length selected as per Table 104		N/A
20.101.4 A	Angle grinders and vertical grinders with side handles: A mass of 1 kg is mounted at the midpoint of the power switch handle and a mass of 0,5 kg is mounted at the midpoint of a side handle installed on each side of the grinder		N/A
A	Angle grinders and vertical grinders without side handles: A mass of 1 kg is attached at the midpoint of the power switch handle. An adaptor with simulated side handles as means of suspension and weight attachment of 0,5 kg at each side is to be provided for the test		N/A
A	Adaptor has a mass as small as possible and is located at less than half the rated capacity distance behind the output spindle for angle grinders and vertical grinders		N/A
A	The three suspension ropes are anchored to a single point		N/A
A	The tool is positioned inside a test box		N/A
A	For wheel guards of Type D that cover 360° of the wheel's periphery, tool not required to be positioned inside the test box of Figure 111; suitable enclosure for test operator safety chosen		N/A
A	Angle grinder or vertical grinder facing down and positioned as specified		N/A
A	Side handles secured to the box with force of $< 5\text{ N}$		N/A
A	High-speed camera used (option)		N/A
20.101.5 A	The wheel speed being monitored with a tachometer, the voltage to the tool is gradually increased until 90% of the rated no-load speed		N/A
A	If wheel does not burst, length of pre-cut notches is increased or ...		N/A
A	... (at manufacturer's option) wheel speed is further increased until wheel bursts		N/A
A	Dust, minor fragments and segments remaining in the wheel guard are ignored		N/A
A	Most of the four major segments are captured by the liner material wall		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	If any of the major segments rebound from the liner material, the segment's impression are identified		N/A
20.101.6 A	a) The speed of the wheel just prior to the wheel bursting is at least the speed specified in 20.101.5		N/A
A	b) Wheel guard and fasteners or the wheel guard's mounting hardware remain mounted		N/A
A	Deformation, hairline cracks or scratches and gouges to the wheel guard and mounting hardware are acceptable		N/A
A	c) The impression of the impact in the wall from the major wheel segments are within the fragment zone (not applicable for wheel guards of Type D that cover 360°)		N/A
A	d) Wheel guard as not rotated in the direction of the wheel rotation by more than 90° (not applicable for wheel guard that covers 360°)		N/A
A	If the wheel guard has failed any of the requirements in b) to d) above at a wheel burst speed above the speed specified in 20.101.6, the test is repeated using the method of increasing the length of the pre-cut segments		N/A
20.102 A	Strength of wheel guards of Type F		N/A
20.102.1 A	Wheel guard of Type F has sufficient mechanical strength to withstand a wheel breakage		N/A
A	Three samples of Type F wheel guards intended for bonded reinforced wheels submitted to test of 20.102.2 to 20.102.5.		N/A
A	For wheel guards intended only for diamond wheels, compliance checked either by – the test of 20.102.2 to 20.102.5, using bonded reinforced wheels $\geq 2,5$ mm thick and with a diameter approximately equal to the diameter of the diamond wheels in accordance with 8.14.2 a) 101) and the acceptance criteria of 20.102.6; or		N/A
A	– meeting the design requirements in Table 105		N/A
20.102.2 A	Guard is mounted and securely fixed to the grinder in accordance with the instructions of 8.14.2 b) 104).		N/A
	Bonded reinforced wheel with the maximum thickness recommended in 8.14.2 a) 104) and with a diameter equal to the rated capacity is mounted		N/A
	Speed of the wheel is measured and recorded after 5 min operation.		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Grinding wheel is notched into four quadrants with a notch width of $\leq 2,5$ mm		N/A
20.102.3	The grinding wheel with maximum thickness in accordance with 8.14.2 a) 104) with a diameter equal to the rated capacity of the grinder is notched into four quadrants with a notch width of $\leq 2,5$ mm		N/A
A	Bonded reinforced wheel with the maximum thickness recommended in 8.14.2 a) 104) and with a diameter equal to the rated capacity is mounted		N/A
A	Speed of the wheel is measured and recorded after 5 min operation.		N/A
A	Grinding wheel is notched into four quadrants with a notch width of $\leq 2,5$ mm		N/A
A	The grinding wheel with maximum thickness in accordance with 8.14.2 a) 104) and a diameter equal to the rated capacity of the grinder is notched into four quadrants with a notch width of $\leq 2,5$ mm		N/A
A	Extent of the notches such as to cause the wheel to disintegrate at a speed equal to or greater than either the speed established in 20.102.2 or 90 % of the rated no-load speed of the grinder, whichever is higher		N/A
A	The notched grinding wheel is mounted to the spindle with any mounting means that will allow for the centrifugal forces to cause the wheel to disintegrate		N/A
20.102.4	Grinders with side handles:		N/A
A	A mass of 1 kg is mounted at the midpoint of the power switch handle and a mass of 0,5 kg is mounted at the midpoint of a side handle installed on each side of the grinder		N/A
A	Tool suspended with the foot of the wheel guard facing down		N/A
20.102.5	The wheel speed being monitored with a tachometer, the voltage to the tool is gradually increased until speed specified in 20.102.3		N/A
A	If wheel does not burst, length of pre-cut notches is increased or ...		N/A
A	... (at manufacturer's option) wheel speed is further increased until wheel bursts		N/A
20.102.6	Wheel guard and fasteners or the wheel guard's mounting hardware remain in place		N/A
A	Deformation, hairline cracks or scratches and gouges to the wheel guard and mounting hardware are acceptable		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
20.103 A	Strength of wheel guards of Type G		–
20.103.1 A	Wheel guard for straight grinder has sufficient mechanical strength to prevent wheel fragments from being ejected towards the operator in the event of a wheel breakage		P
A	Three samples of Type F wheel guards intended for bonded reinforced wheels submitted to test of 20.103.2 to 20.103.5.		N/A
20.103.2 A	Guard is mounted and securely fixed to the grinder in accordance with the instructions of 8.14.2 b) 104).		P
A	Maximum thickness grinding wheel is notched into four quadrants with a notch width of $\leq 2,5$ mm		P
A	The notched grinding wheel is mounted to the spindle with any mounting means that will allow for the centrifugal forces to cause the wheel to disintegrate at a speed ≥ 90 % of the rated no-load speed of the grinder		P
20.103.3 A	A mass of 1 kg is attached and an adapter with an attachment of 0,5 kg is provided		P
A	Adaptor has mass as small as possible and is located as specified		P
A	Suspension point and weight attachment on the left and right side of the tool is located as specified		N/A
20.103.4 A	The wheel speed being monitored with a tachometer, the voltage to the tool is gradually increased to 90 % of rated no-load speed		P
A	If wheel does not burst, length of pre-cut notches is increased or ...		N/A
A	... (at manufacturer's option) wheel speed is further increased until wheel bursts		P
20.103.5 A	a) The speed of the wheel just prior to the wheel bursting is at least the speed specified in 20.103.2		P
A	b) Wheel guard and fasteners or the wheel guard's mounting hardware remain mounted		P
A	Deformation, hairline cracks or scratches and gouges to the wheel guard and mounting hardware are acceptable		P
A	If the wheel guard has failed requirement b) above at a wheel burst speed above the speed specified in 20.103.2, the test is repeated using the method of increasing the length of the pre-cut segments		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
21	CONSTRUCTION		
21.1	Hazardous accidental changing of settings to suit different voltages or speeds unlikely to occur		N/A
21.2	Accidental changing of settings of control devices unlikely to occur		N/A
21.3	Removal of parts ensuring required degree of protection against moisture not possible without aid of a tool		N/A
21.4	Fixing of handles, knobs and the like, used to indicate position of switches or similar components in a hazardous wrong position, was not possible		P
21.5	Replacement of a flexible cable or cord requiring displacement of a switch was possible without subjecting internal wiring to undue stress		P
	After repositioning of the switch and before reassembling the tool, verification of correct positioning of internal wiring was possible		P
21.6	Wood, cotton, silk, paper and similar fibrous or hygroscopic material not used as insulation, unless impregnated or chemically rendered non-fibrous		P
21.7	Ordinary driving belts not relied upon to provide required insulation		N/A
	Special belt design employed to allow use as electrical insulation		N/A
21.8	Insulating barriers of Class II tools, and parts of Class II tools serving as supplementary or reinforced insulation are:		P
	- fixed such that they cannot be removed without being seriously damaged; or		N/A
	- so designed that they cannot be replaced in an incorrect position, and when omitted, the tool will be inoperable or manifestly incomplete		P
21.9	Inner conductors of a flexible cable or cord are used as wiring within class II construction and insulated from accessible metal parts by:		P
	- the sheath of the supply cord itself, this sheath not being exposed to undue thermal stress, clamping against accessible metal or other mechanical stress that could cause damage to it; or		P
	- a sleeve, tubing or barrier complying with the requirements of supplementary insulation.		N/A
21.10	Air-intake of motor enclosures not excessively large		P
	6 mm steel ball test applied to air-intake openings other than those adjacent to fan		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
21.11	No hazards from parts of Class I tool such as wire, screw, nut, washer or spring becoming loose or falling out of position, and accessible metal not made live		N/A
	Clearance and creepage distances of Class II tool or class II construction not reduced to less than 50% of values shown specified in 28.1		P
	Class II tool or Class II construction, other than those of the all-insulated type, provided with an insulating barrier between accessible metal and motor parts and other live parts		P
	Class I tool with adequately fixed parts, barriers, and sufficiently large creepage and clearances		N/A
	All wires secured in place independent of terminal connection or solder		P
21.12	Supplementary and reinforced insulation not impaired by deposition of dirt, or dust resulting from wear of parts within the tool to the extent that creepage and clearances would be reduced		P
	Ceramic material not tightly sintered and similar materials, and beads alone, not used as supplementary or reinforced insulation		N/A
	Parts of Elastomer, natural or synthetic rubber used as supplementary insulation are resistant to aging		N/A
	Rubber parts so arranged and dimensioned that creepage distances not reduced below values in 28.1, even when cracks occurred		N/A
	Insulated material for embedded heating conductors serves only as basic insulation		N/A
	Ageing test for Elastomer and rubber parts for 70 h at 100±2°C		N/A
	No flashover or breakdown occurred during test of D.2, test voltages reduced to 75 per cent	See Table D.2	N/A
	Rubber parts tested		—
	Immersion test for ceramic material on tight sintering in specified fuchsine solution under no less than 15 MPa		N/A
	Test pressure applied (MPa)		N/A
	Test duration (h).....		N/A
	After the test, freshly broken surfaces did not show any trace of dye visible with normal vision		N/A
	Ceramic parts tested.....		—

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
21.13	Internal wiring, windings, commutators, slip rings and the like, and insulation in general, not exposed to oil, grease, and similar substances		P
	Adequate insulation properties of oil, grease, and similar substances used for lubrication of gears and the like with no effect on insulation		N/A
21.14	No access to brushes without aid of a tool		P
	When tightening screw-type brush-caps, two surfaces clamped together		N/A
	Locking device retaining brushes in position do not depend upon brush spring tension		P
	Screw-type brush-caps accessible from the outside of the tool made of or covered with insulating material of adequate strength, and not projecting beyond surrounding surface of the tool		N/A
21.15	Tool employing a liquid system protects the user against increased risk of shock due to presence of liquid under normal use and faults of liquid system		N/A
	Tools employing liquid system constructed as Class III tools, or		N/A
	- class I or II and provided with a residual current device, and complying with 14.3-14.5, or		N/A
	- class I or class II and designed for use in combination with an isolating transformer and complying with 14.3 and 14.4		N/A
21.16	Tool with compartment accessible without the aid of a tool and likely to be cleaned in normal use, the electrical connections are not subject to pulling during cleaning		N/A
21.17	Tool is fitted with a power switch to control the motor		P
	Switch actuator easily visible and accessible		P
21.17.1	For tools incorporating a switch with a lock-off device, and switch trigger is operated by squeezing action closing the fingers towards the palm of the hand, lock-off system designed to ensure sufficient durability against abuse and environmental conditions to prevent start by the switch trigger alone		N/A
21.17.1.1	Relevant tool housing is kept for 1 h in a heating cabinet at 80 °C		N/A
21.17.1.2	Additional test of 21.17.1.2 for lock-off devices that are self-restoring to the lock-off position		N/A
	Number of cycles as per 23.1.10.2		N/A
21.17.1.3	Push force of Table 7 applied to most unfavourable point of the switch actuating member.....		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	The switch did not actuate		N/A
	The switch and its lock-off system operated as designed after the applied force was terminated		N/A
21.18 M	Requirements of 21.18.1 and 21.18.2 observed applicable		P
21.18.1	Hand-held tool fitted with momentary power switch, unless without a relevant part of IEC 62841-2 and without a substantial risk from continued operation		P
	Switch can be switched on and off by the user without releasing any of the required handle(s) or grasping surface(s)		P
A	For angle grinders and vertical grinders with a rated capacity not exceeding 100 mm and straight grinders with a rated capacity not exceeding 55 mm, power switches other than momentary power switches are used as permitted		N/A
21.18.1.1	A momentary switch locking in "on" position unlocks automatically upon a single actuation motion without releasing the grasp on the tool		N/A
	More than one switch, the lock-on switch(es), if any, is (are) within the grasping zone necessary to control the tool		N/A
	Any one of these switches automatically unlocks or makes ineffective all remaining lock-on devices with a single actuation motion without releasing the grasp on the tool		N/A
	Switch cannot be locked in "on" position when a risk with continued operation is defined by the relevant part of IEC 62841-2		N/A
A	For tool with momentary power switch, lock-on device provided with two dissimilar actions necessary to lock the power switch in the "on" position		N/A
A	In addition, only a single motion to the switch is required to automatically return to the "off" position		N/A
A	For tools with both a lock-off and lock-on function, not possible to actuate both the lock-off function and the lock-on function with a single direction of motion, unless ...		N/A
A	... a distinct change in the direction of the motion is required to continue to the lock-on position after actuating the lock-off function and before actuating the lock-on function		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	For mains-operated single phase grinders, either – the power switch automatically switches off the motor as soon as the actuating member of the switch is released and shall has no locking arrangement in the “on” position, or ...		P
A	... the tool incorporates a lock-on device and does not restart after an interruption of the mains supply without releasing the lock-on device and re-actuating the power switch		N/A
A	Grinder is operated; lock-on device engaged; grinder is then disconnected from the mains and, after at least 2 s, reconnected to the mains. Tool does not operate without releasing the lock-on device and re-actuating the power switch		N/A
21.18.1.2 A	For grinders and disc-type sanders with a rated capacity > 55 mm, power switch so located or designed that inadvertent operation is unlikely to occur during lifting, carrying or when the tool is resting on a flat surface		P
A	For tool not provided with a lock-off device, not possible to start the tool when a sphere with a diameter of (100 ± 1) mm is applied to the power switch perpendicularly to the tool's surface where the switch is mounted; and ...		N/A
A	... the gripping length L of the grasping surface in front of or behind the power switch actuating member is ≤ 70 mm		N/A
A	For tools provided with a lock-off device, two separate and dissimilar actions are necessary before the motor is switched on and ...		P
A	... these two actions are not possible with a single grasping motion or a straight line motion and ...		P
A	... the lock-off device is not activated when the tool is resting on a flat surface such that the power switch actuator is facing upwards		P
21.19	Protection against electric shock not affected when screws removed during user maintenance are incorrectly replaced during reassembly		P
	Creepage and clearances between live parts and accessible metal parts not reduced below values in 28.1 when screws are installed at improper screw locations		P
21.20	Tool marked with the first numeral of IP system complies with IEC 60529:2013.....:		N/A
21.21	No risk of electrical shock from charged capacitors when touching pins of the plug		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Max. voltage measured between pins of the plug is ≤ 34 V after 1 s after each disconnection (V)	0 V for all models	P
	Capacitors rated $\leq 0.1 \mu\text{F}$		N/A
	Capacitors complying with the requirements for protective impedance specified in 9.2 and 21.34		P
21.22	Non-detachable protective parts either removable with the aid of a tool or reliably fixed		P
	Snap-in devices have an obvious locked position and have fixing properties that do not deteriorate		N/A
	Parts disassembled and assembled 10 times prior to test		N/A
	Parts affected by temperature tested immediately after conditions of Clause 12		N/A
	Test applied to all parts likely to be detached, whether or not fixed by screws, rivets, or similar parts		N/A
	Weak areas of the covers or parts subjected during 10 s to - 50 N push force		N/A
	- 50 N pull force if the shape of the part prevents easy slippage of fingertips		N/A
	- 30 N pull force if projection of the gripped part is less than 10 mm in the direction of removal		N/A
	Test fingernail of Fig. 1 inserted in apertures and joints with a force of 10 N and then slid sideways with a force of 10 N		N/A
	Axial pull unlikely, test fingernail of Fig. 1 inserted in apertures and joints with a force of 10 N to enable a force of 30 N for 10 s by means of a loop		N/A
	A torque of 2 Nm applied at the same time as pull or push force on parts 50 mm or smaller and likely to be subjected to twisting		N/A
	A torque of 4 Nm applied at the same time as pull or push force on parts larger than 50 mm and likely to be subjected to twisting		N/A
	Projection was less than 10 mm and required a torque of (Nm), test torque reduced		N/A
	Parts not detached, and remained in locked position		N/A
21.23	Handles, knobs, grips, levers etc., withstood axial force of 30 N for 1 minute		P
21.24	Storage hooks and similar devices for flexible cords are smooth and well rounded		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
21.25	Current-carrying parts and other parts resistant to corrosion under normal use		P
	After tests of Clause 15, no sign of corrosion on relevant parts		N/A
	Stainless steel and similar corrosion-resistant alloys and plated steel considered satisfactory		P
21.26	Insulation between parts operating at SELV and other live parts complies with the requirements for double insulation or reinforced insulation		N/A
21.27	Insulation between parts separated by protective impedance comply with requirements for double or reinforced insulation		N/A
21.28	Shafts of operating knobs, handles, levers etc. not live unless their removal does not make the shaft accessible to test probe B of IEC 61032:1997		P
21.29	Handles, levers, and knobs of non-class III tool held or actuated in normal use do not become live during an insulation fault		P
	Metallic handles, levers, and knobs with shaft or fixings likely to become live due to basic insulation fault, either adequately covered by insulating material or their accessible parts separated from their shafts or fixings by insulation		N/A
	Covering or insulating material complies with Electric Strength test in D.2 at 1250 V	See Table D.2	N/A
21.30	Tool likely to cut into concealed wiring or own cord, handles and grasping surfaces - made of insulating material, or		P
	- metal covered by insulating material, or		N/A
	- their accessible parts are separated by insulating barrier(s) from accessible metal parts that may become live by the output shaft		N/A
	Insulated, stick type, auxiliary handle is provided with a flange ≥ 12 mm high above grasping surface between grasping area and accessible parts that may become live by the output shaft		N/A
M	21.30 not applicable for disc-type polishers and disc-type sanders, unless intended to be used as a grinder as per the instructions in accordance with 8.14.1.101.2 a)		N/A
21.31	Capacitors in class II tools not connected to accessible metal parts, and their metallic casings are separated from accessible metal parts by supplementary insulation		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Capacitors tied to accessible metal parts comply with Clauses 9.2 and 21.34		N/A
21.32	Capacitors not connected between contacts of the thermal cut-outs		N/A
21.33	Lamp holders used only for connection of lamps		N/A
21.34	Protective impedance consists of at least two separate components with impedance unlikely to change significantly during lifetime of tool		N/A
	When a component short or open-circuited, values in Clause 9.2 were not exceeded		N/A
	Resistors comply with 14.1 of IEC 60065:2011 and capacitors comply with 14.2 of IEC 60065:2011		N/A
	Single Y1 capacitor acc. to IEC 60384-14 used instead of two separate components		N/A
21.35	M Disc-type sander used exclusively for sanding wooden floors has either integral dust collection/suction device or dust outlet(s)		N/A
	M Grinder intended to be used with a Type E or Type F wheel guard has either integral dust collection/suction device or dust outlet(s)		N/A
	Dust discharge directed away from the operator		N/A
	Dust outlet with external suction device(s) does not impede the normal use of the tool		N/A
22	INTERNAL WIRING		
22.1	Wireways smooth and free from sharp edges, cooling fins, etc		P
	M Holes in metal through which insulated wires pass provided with bushings or have smooth edges with radius $\geq 1,5$ mm		N/A
	Wiring prevented from coming into contact with moving parts		P
22.2	Internal wiring adequately rigid, fixed or insulated such that creepage and clearances cannot be reduced below values in 28.1		P
	Sleeving used as supplementary insulation on internal wiring, retained in position by positive means (removable only by breaking or cutting, or clamped at both ends)		P
22.3	Use of green or green/yellow conductors for earthing terminals only		N/A
22.4	Aluminium wires not used for internal wiring		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
22.5	Stranded conductors with lead-tin soldering are only used with spring terminals with constant contact pressure, except when clamping means pose no risk of bad contact		N/A
22.6	No undue stress to electrical connections and internal conductors from tool parts movable to each other in normal use, during adjustment or user maintenance		N/A
	Flexible metallic tubes do not damage insulation of the conductors contained within them		N/A
	Open-coil springs not used to protect the wiring		N/A
	Adequate additional insulating lining when coiled spring is used		N/A
	Flexing test at a rate of ≤ 6 /min, through the largest angle allowed by the construction		N/A
	Number of flexings 10 000 for conductors/connections flexed during normal use; 2 000 for those flexed during adjustments; 100, for those flexed during user maintenance		—
	Tool withstands test of Annex D between live parts and accessible parts	See Table D.2	N/A
	Live parts not accessible after test		N/A
23	COMPONENTS		
23.1	Components comply with relevant IEC standards	See Critical Components Table	P
	Batteries are regarded as part of the tool and comply with Annexes K and/or L		N/A
	Components used in accordance with their markings		P
	Applied exceptions		N/A
	Components not previously tested and found to comply with the relevant IEC standard for the number of cycles specified, tested to 23.1.1 ... 23.1.11		N/A
23.1.1	Capacitors in auxiliary windings of motors marked with their rated voltage and rated capacitance		N/A
23.1.2	Fixed capacitors for radio interference suppression comply with IEC 60384-14		P
23.1.3	Small lamp holders similar to E10 lamp holders meet requirements for E10 lamp holders in IEC 60238		N/A
23.1.4	Isolating and safety isolating transformers comply with IEC 61558-1 and IEC 61558-2-4 or IEC 61558-2-6, as applicable		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Switch mode power supply units and transformers for such units comply with IEC 61558-2-16		N/A
23.1.5	Appliance couplers comply with IEC 60320, or		N/A
	Instructions provided to inform user to connect the tool with non-IEC appliance couplers		N/A
23.1.6	Automatic temperature controls with electromechanical contacts that cycle in normal use have suitable endurance		N/A
	Tests to IEC 60730-1:2010, Cl. 17, conducted under conditions occurring in the tool		N/A
	Type of controls used and number of cycles per Cl. 17 of IEC 60730-1:2010 (cycles)..... :		N/A
	Automatic controls comply with IEC 60730-1:2010, and are used in accordance with their marking		N/A
	Tests of Clause 17 of IEC 60730-1:2010 were not conducted on automatic controls because tool complies with this standard when protective device short-circuited		N/A
	Thermostats and temperature limiters tested in accordance with a specific exception in Note b) of Table 1 of Clause 12		N/A
23.1.7	Unless otherwise specified, tests on components per other standards conducted separately according to the relevant standard		P
	Component, marked and used per its markings		P
	Components not mentioned in Table 1 of Clause 12 tested as part of the tool		P
23.1.8	Components not separately tested and found to comply with the component standards as references in 23.1 or components not marked or not used in accordance with their marking, tested in accordance with the referenced relevant standard under the conditions occurring in the tool		N/A
	No IEC standard referenced in 23.1, no additional tests		N/A
23.1.9	Tool operated at 1,1 times rated voltage at no-load, capacitor voltage did not exceed 1.1 times its rated voltage (V)..... :		N/A
23.1.10	Switches constructed to prevent failure that might impair compliance with this standard		P
	Switches, separately tested and found to comply with IEC 61058-1:2008, comply with 23.1.10.1		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Switches, not separately tested and found to comply with IEC 61058-1:2008, or not complying with 23.1.10.1, tested as in 23.1.10.2 to 23.1.10.3		N/A
23.1.10.1	Power switches rated for a voltage and current not less than respective ratings of the tool		P
	Power switches rated for a.c. in a.c. tools and d.c. in d.c. tools		P
	Electronic power switches are at least classified for Continuous Duty as in IEC 61058-1:2008		N/A
	Switches for motor-operated tools and lawn and garden machinery classified for resistive and motor load as in 7.1.2.2 of IEC 61058-1:2008, if this load occurs in normal use		P
	Switches for magnetically driven tools and lawn and garden machinery classified for inductive load as in 7.1.2.8 of IEC 61058-1:2008, if this load occurs in normal use		N/A
	Switches alternatively regarded as switches for a declared specific load as in 7.1.2.5 of IEC 61058-1:2008 and classified based on the load conditions of the tool in normal use		N/A
	Ratings and load classifications for switches other than power switches are based on the conditions encountered in the tool		N/A
	Power switches for hand-held tools classified for min. 50K operating cycles	5E4	P
	Power switches with series electronics also endure 1000 operating cycles, electronics bypassed		N/A
	Switches other than power switches, if likely to be switched under electrical load, endure 1 000 operating cycles, unless the requirements of this standard are met with the switch short-circuited		N/A
	Exception for switches other than power switches that cannot be operated under electrical load		N/A
	Exception for motor reversing switches		N/A
	Exception for switches other than power switches, classified for 20 mA load as in 7.1.2.6 of IEC 61058-1:2008		N/A
23.1.10.2	Adequate endurance properties of switches		N/A
	Test of 17.2.4.4 of IEC 61058-1:2008 conducted at load specified in 23.1.10.2.1 or 23.1.10.2.2		N/A
	Power switches for hand-held tools tested for 50K cycles.		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Power switch contains mechanical contacts in series with electronic circuitry with one or more SSD and circuitry provides a protective function by reducing the current during switch operation, then test repeated on 3 samples for ≥ 1000 cycles with the electronics bypassed; or		N/A
	Protective function considered SCF and complies with the greater PL levels for power switches in 18.8		N/A
	Switches other than power switches, if likely to be switched while energized, tested for 1000 cycles under load conditions of normal use		N/A
	After tests all switches were able to be turned on and off and complied with the insulating compliance (TE3) of 17.2.5.3 of IEC 61058-1:2008 for basic insulation		N/A
23.1.10.2.1	Power switches for motor-operated tools and lawn and garden machinery classified to 7.1.2.2 of IEC 61058-1:2008 and tested with external load as specified		N/A
	Power switches for magnetically driven tools and lawn and garden machinery classified to 7.1.2.8 of IEC 61058-1:2008 and tested with external load as specified		N/A
	Switches other than power switches, but which would encounter the same load conditions as power switches in normal use, tested as specified		N/A
23.1.10.2.2	For switches tested using the motor or magnetic load encountered in the tool, tested at rated voltage for the required number of cycles; tool is switched on at no-load and switched off at rated current or rated input		N/A
23.1.10.3	Power switches of motor-operated tools and lawn and garden machinery have adequate breaking capacity		N/A
	Locked-rotor test (TC9) of 17.2.4.9 of IEC 61058-1:2008 at 6 times I-M or with locked motor, each period $\leq 0,5$ s "on" and ≥ 10 s "off"		N/A
	Power switch showed no electrical or mechanical failure after test		N/A
23.1.11	Electronic power switches comply with 18.6 and 18.8		N/A
23.2	Tool not fitted with switches or automatic controls in flexible cords, except for protective devices such as RCDs		P
	Tool not fitted with devices causing the protection device in the fixed wiring to operate		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Tool not fitted with thermal cut-outs which can be reset by a soldering operation		N/A
23.3 R	Protection devices or circuits that switch off the tool are non-self-resetting unless the tool is equipped with a momentary power switch with no provision for being locked in the "on" position		P
23.4	Plugs and socket-outlets for ELV circuits and those used as terminal devices for heating elements not interchangeable with mains plugs and socket-outlets in IEC 60884, IEC/TR 60083 or IEC 60906-1 or with connectors and appliance inlets complying with IEC 60320-1		N/A
23.5	Motors connected to the supply mains with insulation inadequate for the rated voltage comply with Annex B		N/A
24	SUPPLY CONNECTION AND EXTERNAL FLEXIBLE CORDS		
24.1	Tool provided with a supply cord $\geq 1,8$ m and with a plug; cord length (m)	> 1,8 m	P
	Tool provided with a supply cord at least 1,8 m long and without a plug; cord length (m)		N/A
	Information for connection given in the instructions		N/A
	Tool provided with appliance inlet having at least same degree of protection against moisture as required for the tool		N/A
	Tool provided with a supply cord $\geq 0,2$ m and $\leq 0,5$ m and with a plug or other connector having at least same degree of protection against moisture as required for the tool; cord length (m)		N/A
	Plugs, connectors and inlets suitable for the ratings of the tool		P
24.2	Supply cord assembled to the tool by attachment type (specify X, Y, or Z)	Type Y	P
	Supply cords with type X attachment are specially prepared cords only available from the manufacturer or its service agent		N/A
	Special cord includes part of the tool		N/A
24.3	Plugs fitted with only one flexible cord		P
24.4 R	For angle grinders and vertical grinders with a rated capacity > 155 mm and for straight grinders with a rated capacity > 130 mm, supply cords not lighter than heavy polychloroprene-sheathed flexible cable (code designation 60245 IEC 66) or equivalent		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	PVC cords not used if external metal parts exceed 75 K temperature rise during test of Clause 12		N/A
24.5	Nominal cross-section area of supply cord per Table 8 (mm ²)	1,0 and 1,5 mm ²	P
24.6	Supply cord of class I tool has green or green/yellow core connected to internal earthing terminal of the tool, and to earthing contact of plug		N/A
24.7	Lead-tin solder not used to consolidate leads under contact pressure, except when clamping means used prevents risk of a bad contact		N/A
	Clamping screws alone not used for securing soldered leads		N/A
24.8	Moulding supply cord to any part has no effect on the insulation of the cord		N/A
24.9	Supply cord protected against damage at its entry by flexible cord guard, or cord inlet, or bushing	Cord guard	P
24.10	Cord inlets and bushings shaped to prevent damage to supply cord		N/A
	Cord inlet and bushings reliably fixed and not removable without the aid of a tool		N/A
24.11	In tools other than transportable tools, supply cord being flexed during operation is protected against excessive flexing at its entry	Cord guard used to protect against excessive flexing	P
	Flexing test performed in apparatus shown in Fig. 2		P
	Weight attached to cable or cord (kg)	3,4	—
	Oscillating member moved back and forth through an angle of 90° (45° on either side of the vertical) with rate of 60 flexings per minute		P
	After 10,000 flexings, sample turned through 90° about the centre of the cord entry		P
	Cord guard did not slip out from its location after completion of ten 1 sec lifts over 500 mm		P
	After the test, no conductor disconnected from terminal		P
	Number of strands versus number of broken strands of each conductor ≤ 10%	0 % for all models	P
24.12	In tools other than transportable tools, supply cord being flexed during operation is protected against excessive bending at its entry	See table 24.12	P
	Cord guard fixed reliably and projects outside tool for a distance beyond inlet opening of at least 5 times the overall diameter of cord		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Mass attached to the free end of cord (g)	672	—
	Curvature of cable or cord is nowhere less than 1,5 times the external diameter of cord		P
24.13	Tool provided with cord anchorage to relieve conductors of cord from strain, twisting, and protect them from abrasion.		P
	Pushing cord into the tool not possible		P
	Pull force was applied 25 times at the force shown in Table 9 (N)	60 N	—
	After pull test, cord, unless on an automatic cord reel, subjected to torque in Table 9 for 1 min (Nm) :	0,25	P
	The cord was not damaged during the tests		P
	No appreciable strain at the terminals		P
	Cord longitudinal displacement (mm)	0 mm	P
	No appreciable strain at the connection		P
24.14	Cord anchorage either accessible only with the aid of a tool, or the cord can only be fitted using a tool		P
24.15	Cord anchorages properly designed and located		P
	Cord cannot touch clamping screws of the cord anchorage that not separated from accessible metal parts by supplementary insulation		P
	Cord not clamped by metal screw bearing directly on the cord		N/A
	Glands are not used as cord anchorages		P
	Class I tool, cord anchorage of insulating material or with insulating lining fulfilling basic insulation, if an insulation fault on the cord could make accessible metal parts live		N/A
	Class I tool, sheath of the cord considered adequate		N/A
	Class II tool, cord anchorage of insulating material or insulated by supplementary insulation (sheath of the cord alone not sufficient)		P
24.16	Cord anchorages for type X attachment properly designed and located	Type Y	N/A
	Cord anchorage allows easy replacement of cord		N/A
	Clear method of relief from strain and prevention of twisting		N/A
	Screws operated during cord replacement are not used to fix any other part		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws operated during cord replacement are used to fix other parts and, if omitted or incorrectly mounted, make the tool inoperative or clearly incomplete		N/A
	Parts fastened to the cord anchorage by the same screw could not be removed without the aid of a tool		N/A
	Conductors inserted into terminals, terminal screws tightened sufficiently to prevent conductors from easily changing their position, torque set at (Nm) ..:		N/A
24.17	Knots and tying strings for type X attachment are not used		N/A
24.18	For type X attachment, space for supply cord provided inside or as a part of tool		N/A
	- permits verification of correct connection and positioning of conductors		N/A
	- permits covers to be fitted without risk of damage to supply conductors or their insulation		N/A
	- ensures that uninsulated end of conductor, when detached from a terminal, cannot come into contact with accessible metal parts, or terminations are unlikely to slip free of the conductor		N/A
	For pillar terminals (with conductors that are not separately clamped ≤ 30 mm from terminal), and for other terminals with screw clamping, a force of 2 N applied to the wire in any direction and adjacent to the terminal, screw or stud		N/A
	The uninsulated end of the conductor did not come into contact with accessible metal parts		N/A
24.19	Appliance inlet prevents access to live parts during insertion or removal of the connector		N/A
	Easy insertion of connector		N/A
	After insertion of connector, tool not supported by the connector in any position of normal use on a flat horizontal surface		N/A
	Test probe B of IEC 61032:1997 applied to tool inlet other than appliance inlet per IEC 60320		N/A
	Appliance inlet complies with IEC 60320		N/A
24.20	Interconnection cords meet the requirements for the supply cord, exceptions as follows		N/A
	Cross-sectional area is based on maximum current through conductor during test of Clause 12		N/A
	Insulation adequate for conductor's working voltage		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Test of 24.11 restricted to range of motion during normal use.		N/A
24.21	Interconnection cords not detachable without tool if compliance with this standard is impaired when they are disconnected		N/A
25	TERMINALS FOR EXTERNAL CONDUCTORS		
25.1	Tool provided with terminals or equally effective devices for connection to external conductors		P
	Terminals only accessible with the aid of a tool		P
	Screws and nuts allowed to also clamp internal conductors when they are unlikely to be displaced when fitting supply conductors		N/A
	Screws and nuts do not fix other components		N/A
	For tool with type X attachment, soldered connections allowed for connection of external conductors, when soldering alone is not used to maintain conductor in position		N/A
	When provided, barriers prevent creepages and clearances between live parts and other metal parts from being reduced to < 50% of values in 28.1, the conductor can be fixed by soldering alone		N/A
	For type Y and Z attachments, soldered, welded, crimped and similar connections allowed for the connection of external conductors		N/A
	Class II tools, conductor so positioned or fixed that soldering, crimping, or welding alone not relied upon to maintain the conductor in the position		N/A
	Barriers prevent creepages and clearances between live parts and other metal parts from being reduced to < 50% of values in 28.1 for the Class of tool using Type Y or Z attachments		N/A
	Conductors connected by soldering are held in place near termination independent of solder		N/A
	Conductor is "hooked in" before soldering and the hole through which it passes is not too large		N/A
	Terminals of a component built into the tool used to secure external conductors		P
	Conductors connected by other means, leads additionally fixed near terminations		N/A
	Stranded conductors secured at insulation and conductor		N/A
25.2	Terminals for supply cords suitable for their purpose		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Supply cord terminals withstood pull force of 5 N		P
25.3	For type X attachment, when clamping means tightened or loosened, terminal did work loose, no stress on internal wiring, and creepage and clearances not reduced below values in 28.1	Type Y	N/A
	Test per Clause 9.6, using 2/3 torque of that in Table 4, of IEC 60999-1:1999 (Nm)		N/A
	Terminals secured by two screws to prevent loosening, or by one screw in a recess, or by other suitable means		N/A
	Correct position of supply terminals maintained by switches and similar devices with recesses and verified after connection of supply cord and repositioning of device		N/A
	Sealing compound without other means of locking not used		N/A
	Self-hardening resins used only on terminals that are not subject to torsion in normal use		N/A
25.4	Type X attachment using terminals to clamp the conductor between metal surfaces do so without damage to conductor after torque test per Cl. 25.3	Type Y	N/A
25.5	End of conductor inserted in the hole of pillar type terminals is visible, or can pass beyond threaded hole for a distance of half nominal diameter of screw, or 2,5 mm, the greater of the two (mm)		N/A
25.6	For type X attachment, terminals clearly recognizable and accessible after opening the tool		N/A
	All terminals located behind one cover, or one part of the enclosure		N/A
25.7	For tool with type X attachment, terminal devices located or shielded to prevent a strand of wire from escaping		N/A
	No risk of accidental connection between live parts and accessible metal parts		N/A
	For class II tool, no risk of accidental connection between live parts and metal parts with supplementary insulation only		N/A
	8 mm long free wire of the stranded supply conductor did not touch any accessible metal part		N/A
	8 mm long free wire of the stranded supply conductor did not touch any metal parts with supplementary insulation only		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	8 mm long free wire of stranded conductor connected to an earthing terminal did not touch any live part		N/A
26	PROVISION FOR EARTHING		
26.1	Accessible metal parts of class I tool permanently connected to an earthing terminal or termination within the tool		N/A
	Accessible metal parts of class I tool permanently connected to the earthing contact of the tool inlet		N/A
	Printed circuit boards are not used to provide continuity of protective earthing circuit		N/A
	No electrical connection between earthing terminals or contacts and neutral terminal		N/A
	No provision for earthing in Class II and III tools		P
	Rotating motor components with metal-to-metal bearing surfaces considered electrically bonded		N/A
	Metal parts behind a decorative cover that do not withstand test of Clause 20 considered accessible metal parts		N/A
26.2	Clamping means of earthing terminals adequately locked against accidental loosening		N/A
	Earthing connections not possible to loosen without the aid of a tool		N/A
	Terminals with screw clamping comply with the relevant requirements of Clause 25, and screwless terminals comply with IEC 60998-2-2		N/A
	For specially prepared cords, terminals comply with IEC 61210 and table 10		N/A
	Screwless terminals tested per IEC 60998-2-2		N/A
26.3	Earth connection of detachable parts was made before the current-carrying connections established when placing the part in position, and the current carrying connections separated before earth connection was broken when removing the part		N/A
	If cord slips out of cord anchorage, current-carrying conductors become taut before earthing conductor		N/A
26.4	No risk of corrosion between metal parts of earthing terminals and copper of earthing conductor		N/A
	Parts transmitting current in case of an insulation fault, other than parts of metal frame or enclosure, are coated or uncoated metal with adequate resistance to corrosion		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Thickness of electroplated coating (μm)		N/A
	Parts of coated or uncoated metal providing or transmitting contact pressure only, adequately protected against rusting		N/A
	Protection provided against risk of corrosion resulting from contact between copper and aluminium (or aluminium alloy)		N/A
	Parts subjected to a treatment such as chromate conversion coating are used only to provide or transmit contact pressure		N/A
	Thickness of coating of steel measured in accordance with ISO 2178 or ISO 1463 (μm).....		N/A
	Resistance to rusting test	See also 15.1	N/A
26.5	Resistance of earthing circuit (max. 0.1Ω).....		N/A
	Test current (A)		—
	Voltage drop between the earthing terminal and accessible metal part (V)		—
27	SCREWS AND CONNECTIONS		
27.1	Fixings and electrical connections (earthing connections included) withstand mechanical stresses occurring in normal use		P
	Screws not made of soft metal such as zinc or aluminium		P
	Diameter of screws of insulating material not used for electrical or earthing connection, diameter (mm).		N/A
	Screws transmitting electrical contact pressure screw into metal		P
	Screws of insulating material not used if their replacement by a metal screw could impair supplementary or reinforced insulation		N/A
	Screws removed when replacing the supply cord with type X attachment, or during maintenance, are not of insulating material where their replacement by a metal screw could impair basic insulation		P
	Screws and nuts tightened and loosened 10 times for screw engaged with a thread of insulating material		P
	Nuts and other screws tightened and loosened five times		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Screws engaging with a thread of insulating material completely removed and reinserted each time		P
	When testing terminal screws and nuts, a flexible conductor of the largest cross-sectional area per Clause 24.5 placed, and each time repositioned, in the terminal (mm ²)		N/A
	Test using a suitable test screwdriver, spanner or key, torque as in Table 11 and the relevant column		P
	Column I for metal screw without head, flush with surface (Nm)		N/A
	Column II for other metal screws and nuts (Nm)	See table 27.1	P
	Column II for screws of insulating material, having a hexagonal head with a width across flats exceeding overall thread diameter (Nm).....		N/A
	Column II for screws of insulating material, having a cylindrical head and a key socket with a width across corners exceeding overall thread diameter (Nm) ...		N/A
	Column II for screws of insulating material, with a head having a slot or cross-slots longer than 1,5 times the overall thread diameter (Nm).....		N/A
	Column III applied to other screws of insulating material (Nm)		N/A
	No damage impairing further use of fixing or electrical connections		P
27.2	Contact pressure not transmitted through insulating material other than ceramic, unless compensated for shrinkage or distortion		N/A
27.3	Space-threaded screws not used for connection of current-carrying parts, unless direct clamping and suitable locking provided		N/A
	No thread-cutting screws used for connection of current-carrying parts		P
	Use of two space-threaded or thread-cutting screws in earthing circuits		N/A
27.4	Screws making both mechanical and electrical connections are locked against loosening		N/A
	Rivets for current-carrying connections subjected to torsion in normal use locked against loosening		N/A
27.5	Screwless connectors not intended for disconnection in normal use prevent disconnection in normal use		P
	Connectors withstood 5 N pull through the wire		P
	Neither the connector nor the wire became disconnected		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Directions of the application and exit of the wire not in line, force applied in both directions, one at a time		N/A
	Connectors fulfilled relevant IEC standards and were considered to fulfil requirements of 27.5.		N/A
27.5.1	Conductors secured by more than one means, unless their detachment does not impair safety		P
	Only one means of securing, test with detached conductors		N/A
	Clearances not reduced below 50 % of values in 28.1		N/A
28	CREEPAGE DISTANCES, CLEARANCES AND DISTANCES THROUGH INSULATION		
28.1	Creepage and clearances not less than the values in Table 12, except for cross-over points of motor windings	See Table 28.1	P
	When a resonance voltage occurs, creepage and clearance are not less than specified for the voltage imposed by the resonance; these values increased by 4 mm in case of reinforced insulation		N/A
	Creepage and clearances for a tool with an appliance inlet measured with an appropriate connector inserted		N/A
	Creepage and clearances on a tool with other attachment measured on the tool as delivered		N/A
	Measurements on tool with belt made with the belt in place and belt tension adjusted to the most unfavourable position within its adjustment range		N/A
	Measurements repeated with the belt removed		N/A
	Movable parts placed in the most unfavourable position		P
	Nuts and screws with non-circular heads tightened in the most unfavourable position		N/A
	Clearances between terminals and accessible metal parts also measured with screws and nuts unscrewed as far as possible and they were not less than 50% of Table 12	See Table 28.1	P
	Distances through slots or openings in external parts of insulating material measured to metal foil in contact with accessible surface with the foil pushed into corners using test probe B of IEC 61032:1997 :	See Table 28.1	P
	2 N force applied to internal wiring, bare conductors and uninsulated capillary tubes of thermostats and similar devices during measurement		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	30 N force applied to enclosure		P
	Measurements made according to Annex A	See Table 28.1	P
	Creepage and clearances on a tool having parts with double insulation and no metal between basic insulation and supplementary insulation		P
	PWB with peak voltage stresses ≤ 150 V per mm between parts of different potential provided with a min. distance of 0.2 mm, when protected against deposition of dirt	See Table 28.1	N/A
	-PWB with 100 V per mm provided with a min. distance of 0.5 mm, when not protected against deposition of dirt	See Table 28.1	N/A
	Values of the table applied when limits mentioned above resulted in higher values than in the table	See Table 28.1	N/A
	Distances reduced further since the tool complied with the requirements of Clause 18 distances short-circuited one at a time.....:	See Table 28.1	N/A
	Creepage and clearances within optocouplers not measured when individual insulation adequately sealed, with air excluded between material layers		N/A
	For live parts of different polarity separated by basic insulation only, creepage and clearances reduced as tool complied with Clause 18 when creepage and clearances short-circuited.....:	See Table 28.1	N/A
28.2	Distance through insulation between metal parts was ≥ 1.0 mm for working voltages ≤ 130 V when separated by supplementary insulation	See Table 28.2	N/A
	Distance through insulation between metal parts was ≥ 1.5 mm for working voltages ≤ 130 V when separated by reinforced insulation	See Table 28.2	N/A
	Distance through insulation between metal parts was ≥ 1.0 mm for working voltages $> 130\text{V} \leq 280\text{V}$ when separated by supplementary insulation, and ≥ 2.0 mm when separated by reinforced insulation	See Table 28.2	N/A
	Distance through reinforced insulation between windings and accessible metal parts was ≥ 1.0 mm for working voltages $\leq 280\text{V}$	See Table 28.2	P
	Requirement waived as insulation applied was in thin sheet form, other than mica or similar, and for supplementary insulation consisting of at least two layers, one layer having withstood electrical strength test for supplementary insulation		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Requirement waived as insulation applied was in thin sheet form, other than mica or similar, and for reinforced insulation consisting of at least three layers, two layers having withstood electrical strength test for reinforced insulation		N/A
	Requirement waived as max. temperature rise determined during test of Cl. 12 did not exceed values in 12.5 for inaccessible supplementary or reinforced insulation		N/A
	Requirement waived as inaccessible reinforced or supplementary insulation, after conditioning for 168h at 50 K above max. temperature rise determined per Cl. 12, withstood test of Annex D at the oven temperature and room temperature (°C)	See Table D.2	N/A
	For optocouplers, 168 h of conditioning at 50 K above the max. temperature rise measured on optocouplers during tests of Clauses 12 and 18, while operating under most difficult conditions		N/A

ANNEX B	MOTORS NOT ISOLATED FROM THE SUPPLY MAINS AND HAVING BASIC INSULATION NOT DESIGNED FOR THE RATED VOLTAGE OF THE TOOL		N/A
----------------	---	--	-----

ANNEX C	LEAKAGE CURRENT		
C.2	Leakage current measurement of non-operating tool	See Tables C.2A and C.2B	P
C.3	Leakage current measurement of operating tool	See Tables C.3A to C.3D	P

ANNEX D	ELECTRIC STRENGTH		
D.1	Any protective impedance were disconnected		N/A
	The tools were not connected to the supply		P
	Electric strength is checked by the tests of D.2		P
	For tools with heating elements, test voltages of IEC 60335-1:2010 apply to the heating elements only		N/A
	Insulation between live parts of motor in accordance with Annex B and its other metal parts not subjected to this test		N/A
	Tool in accordance with Annex L, tool is directly connected to the mains or to a non-isolated source		N/A
	Electronic devices bypassed to enable the test to be conducted		N/A
D.2	Test duration 1 min		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Voltage of substantially sinusoidal waveform, frequency 50 Hz or 60 Hz		P
	Electric strength test, voltages applied..... :	See Table D.2	P
	To distinguish between capacitor reactance current and unacceptable performance, d.c. potential 1,414 times the that for a.c. was used..... :		N/A
	No flashover or breakdown occurred during the test	See Table D.2	P
ANNEX H	LOW-POWER CIRCUITS		
	Any points closest to the supply at which the maximum power delivered to the variable resistor does not exceed 15 W at the end of 5 s identified as called a low power points		N/A
ANNEX K	BATTERY TOOLS AND BATTERY PACKS		N/A
ANNEX L	BATTERY TOOLS AND BATTERY PACKS PROVIDED WITH MAINS CONNECTION OR NON-ISOLATED SOURCES		N/A
ANNEX AA	WHEEL GUARD TYPES		
Type A A	Type A guard (see Figure AA.1) covers the abrasive wheel periphery and both sides of the wheel for at least 175		N/A
A	Front curtain that covers the outer flange side of the wheel designed to allow replacement of the wheel		N/A
A	If front curtain is removable to convert a Type A wheel guard into Type B, it requires removal with the aid of a tool ...		N/A
A	... or is fixed in a reliable manner, see 21.22		N/A
A	Front curtain is supplied with the front curtain assembled		N/A
Type B A	Type B wheel guard (see Figure AA.2) covers the abrasive wheel periphery and the inner flange side for at least 175°		N/A
A	The wheel guard periphery has a lip on the outer edge that curls inward for at least 3 mm from the intersect line of the top surface of the thickest wheel and largest wheel diameter, as specified in accordance with 8.14.2 a) 104), with the inner surface of the wheel guard to the inner edge of the lip, measured radially		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
A	The face of the thickest wheel as specified in accordance with 8.14.2 a) 104) is at least 2 mm axially from the inner surface of the lip		N/A
A	Ends of the lip not chamfered by more than 45°		N/A
Type C A	Type C wheel guard (see Figure AA.3) complies with requirements for Type B and ...		N/A
A	... is covered on the outer flange side by at least a front curtain with a height c of minimum 0,25 times the rated capacity		N/A
A	If front curtain is removable, it requires removal with the aid of a tool or ...		N/A
A	... is fixed in a reliable manner, see 21.22		N/A
A	Wheel guard is supplied with the front curtain assembled		N/A
Type D A	Type D wheel guard (see Figure AA.4) covers the abrasive wheel periphery and the inner flange side for at least 240°		N/A
A	Wheel guard adjustable axially		N/A
Type E A	Type E wheel guard (see Figure AA.5) covers the diamond wheel periphery and the inner flange side for 360°		N/A
A	Permission in order to maintain contact with the surface to enable dust extraction: peripheral part of the wheel guard flexible (e.g. rubber or brushes)		N/A
A	Portion that can be opened to allow flush grinding is $\leq 120^\circ$ and is assembled to the wheel guard or to the tool		N/A
A	If that portion is removable, it requires removal with the aid of a tool or ...		N/A
A	... is fixed in a reliable manner, see 21.22		N/A
A	Wheel guard is supplied with the removable portion assembled		N/A
A	Wheel guard designed to allow dust extraction		N/A
Type F A	Type F wheel guard (see Figure AA.6) covers the wheel periphery and the inner flange side for at least 175° and ...		N/A
A	... at least the outer 20 % radius of a wheel with rated capacity on the outer flange side for at least 175°		N/A
A	Wheel guard provided with a guide plate or guide rollers (may be removable or adjustable)		N/A
A	Wheel guard designed to allow dust extraction		N/A

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
Type G A	Type G wheel guard of (see Figure AA.7) covers the abrasive wheel periphery and the inner flange side for at least 175°		P
A	The wheel guard periphery has a lip on the outer edge that curls inward for at least 3 mm from the intersect line of the top surface of the thickest wheel and largest wheel diameter, as specified in accordance with 8.14.2 a) 104), with the inner surface of the wheel guard to the inner edge of the lip, measured radially		N/A
A	Requirement also fulfilled in case of a front curtain or a combination of a front curtain and a lip, provided ...		P
	... the front curtain is designed to facilitate replacement of the wheel without removing the wheel guard		P

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

8.12 A	TABLE: Label Heating Test			N/A
Test Conditions	Conditioned in oven for 24 h at (120 ± 2) °C Y/N Conditioned in oven for 200 h at: °C Y/N Amount of samples: 3			
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
Supplementary information:				

8.12 B	TABLE: Label immersion tests – Water			N/A
Test Conditions	Pre Treating for 24 h at relative humidity of 45 % and temperature: °C Time of labels in water: 48 h Amount of samples: 3			
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
Supplementary information:				

8.12 C	TABLE: Label immersion tests - Oil (IRM 903)			N/A
Test Conditions	Pre Treating for 24 h at relative humidity of 45 % and temperature: °C Time of labels in oil: 48 h Amount of samples: 3			
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
Supplementary information:				

8.12 D	TABLE: Label Standard atmosphere tests			N/A
Test Conditions	Time of labels in controlled atmosphere at relative humidity of 45%: 72h Controlled atmosphere temperature: °C Amount of samples: 3			
Test Specimen	Material type	Good adhesion and no curling of edges	Label resists defacement and removal when scraped	
Supplementary information:				

IEC 62841-2-3					
Clause	Requirement + Test			Result - Remark	Verdict
9.1	TABLE: Protection against access to live parts				N/A
11	TABLE: Input data under no-load conditions				N/A
Input deviation of/at:	Rated P (W) or I (A)	Measured P (W) or I (A)	Ratio (%)	Required ratio (%)	Remark
115 V (110 – 120 V)	1400 W	558,5 W	251	110	No load
230 V (220 – 240 V)	1500 W	588,9 W	255	110	No load
Supplementary information:					

12.1A	TABLE: Temperature rise measurements under the conditions of 12.2 to 12.5		P
Test voltage (V)	103 / 110 / 120 / 127 V		—
Ambient temperature, t ₁ (°C) :	22,5 °C		—
Ambient temperature, t ₂ (°C) :	21,5 / 21,95 / 21,85 / 21,6 °C		—
Operating time (min, s).....	Until thermal steady		—
Speed (min ⁻¹)	3700 / 4032 / 4783 / 4822 min ⁻¹		—
Input Wattage (W)	1300 / 1400 / 1412 / 1446 W		—
Input current (A)	12,71 / 12,86 / 11,73 / 11,29 A		—
Torque (Nm)	1,931 / 1,931 / 1,382 / 1,382 Nm		—
Thermocouple Locations	Temperature rise measured (K)	Temperature rise limit (K)	
Power cord	40	50	
Ambient of switch	17	30	
X2 capacitor	34	50	
PWB	19	-	
Internal wire	18	50	
Handle	19	50	
Main handle (rear handle)	16	50	
Switch knob	15	50	
Enclosure	16	60	
Motor core	32	-	
Gear box	36	-	
Brush holder	18	65	
Supplementary information:			

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

12.1B	TABLE: Heating test, resistance method					P
	Test voltage (V).....:	103 / 110 / 120 / 127 V				—
	Ambient, t ₁ (°C).....:	22,5 °C				—
	Ambient, t ₂ (°C).....:	21.5 / 21.95 / 21.85 / 21.6 °C				—
Temperature rise of winding	R ₁ (Ω)	R ₂ (Ω)	ΔT measured (K)	ΔT Limit (K)	Insulation class	
Stator (1)	0,248	0,349	105,67	115	Class 155	
Rotor (2)	0,352	0,446	69,63	115	Class 155	
Supplementary information:						

12.1C	TABLE: Temperature rise measurements under the conditions of 12.2 to 12.5					P
	Test voltage (V).....:	207 / 220 / 240 / 254 V				—
	Ambient temperature, t ₁ (°C) :	22,5 °C				—
	Ambient temperature, t ₂ (°C) :	22,3 / 22,2 / 21,55 / 21.6 °C				—
	Operating time (min, s)	Until thermal steady				—
	Speed (min ⁻¹)	3955 / 4260 / 4824 / 4824 min ⁻¹				—
	Input Wattage (W)	1386 / 1510 / 1500 / 1550 W				—
	Input current (A)	6,72 / 6,87 / 6,26 / 6,16 A				—
	Torque (Nm)	2,215/ 2,215 / 1,744 / 1,744 Nm				—
Thermocouple Locations	Temperature rise measured (K)		Temperature rise limit (K)			
Power cord	20		50			
Ambient of switch	15		30			
X2 capacitor	21		50			
PWB	22		-			
Internal wire	20		50			
Handle	17		50			
Main handle (rear handle)	16		50			
Switch knob	16		50			
Enclosure	13		60			
Motor core	28		-			
Gear box	40		-			
Brush holder	14		65			
Supplementary information:						

IEC 62841-2-3					
Clause	Requirement + Test	Result - Remark			Verdict
12.1D	TABLE: Heating test, resistance method				P
	Test voltage (V)..... :	207 / 220 / 240 / 254 V			—
	Ambient, t ₁ (°C)..... :	22,5 °C			—
	Ambient, t ₂ (°C)..... :	22,3 / 22,2 / 21,55 / 21.6 °C			—
Temperature rise of winding	R ₁ (Ω)	R ₂ (Ω)	ΔT measured (K)	ΔT Limit (K)	Insulation class
Stator (1)	0,875	1,00	37,61	115	Class 155
Rotor (2)	1,568	2,130	93,01	115	Class 155
Supplementary information:					

13.1	TABLE: Ball Pressure Test of Thermoplastics				P
Allowed impression diameter (mm)				2,0	—
Object/ Part No.	Manufacturer/ trademark	Material	Test temperature (°C)	Impression diameter (mm)	
Enclosure	-	-	75	0,8	
Grip	-	-	75	0,8	
Plastic support of PCB	-	-	125	0,9	
Supplementary information:					

13.2	TABLE: Glow Wire Test					P
Object/ Part No.	Manufacturer / trademark	Material	Test temperature (°C)	Material ignited, Yes/No	Layer under Test Sample ignited, Yes/No	Verdict
Enclosure	-	-	550	No	No	P
Grip	-	-	550	No	No	P
Plastic support of PCB	-	-	550	No	No	P
Supplementary information:						

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
16	TABLE: Overload Protection of Transformers and Associated Circuits		N/A
Test voltage (V):			—
Ambient temperature (°C)			—
Input current (A) / Input Wattage (W)			—
Applied short-circuit or overload			—
Measurement at:	ΔT measured (K)		ΔT Limit (K)
Transformer winding (thermocouple)			
Transformer winding (T ₁)R-R			
Transformer winding (T ₂)R-R			
Transformer Lamination			
Internal wiring			
Capacitor			
Printed circuit board			
SELV circuits			
Supplementary Information:			

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark		Verdict
18.6.1	TABLE: Fault Condition Tests	P		
	Ambient temperature (°C).....:	21	—	
	Fuse-link Current (A)	-	—	
Component	Fault Condition	Test Voltage (V)	Test Duration*	Comment/Result Test repeated Yes/No**
Whole PWB	Open circuit	115	30 sec	Not work
Whole PWB	Short circuit	115	Until steady	Working at max speed
SCF (prevent exceeding thermal limits) for 110 – 120 V				
R1	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No operation. Safe state.
R2	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No operation. Safe state.
R3	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No loss of SCF
R4	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No operation. Safe state.
R7	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No loss of SCF
R9	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No loss of SCF
R11	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No loss of SCF
R15	Open circuit	115	Until steady	No operation. Safe state.

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark		Verdict
	Short circuit	115	Until steady	No loss of SCF
RT1	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
RT2	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No loss of SCF
RX1A	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No loss of SCF
C1	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
C3	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
C5	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
CT1	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
D1	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No operation. Safe state.
D3	Open circuit	115	Until steady	No operation. Safe state.
	Short circuit	115	Until steady	No operation. Safe state.
D4	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark		Verdict
D5	Open circuit	115	Until steady	No loss of SCF
	Short circuit	115	Until steady	No operation. Safe state.
Q1	Open circuit	115	Until steady	No operation. Safe state.
	B-C Short circuit	115	Until steady	No loss of SCF
	B-E Short circuit	115	Until steady	No operation. Safe state.
	E-C Short circuit	115	Until steady	No loss of SCF
Q2	Open circuit	115	Until steady	No operation. Safe state.
	B-C Short circuit	115	Until steady	No loss of SCF
	B-E Short circuit	115	Until steady	No operation. Safe state.
	E-C Short circuit	115	Until steady	No operation. Safe state.
Supplementary Information: * Tests were continued until - a protective device operates, or - until steady conditions are established or - an open circuit occurs. ** Test was repeated on a second sample due to an intentionally weak part permanently open-circuited to terminate the test.				

18.6.1	TABLE: Fault Condition Tests	P		
	Ambient temperature (°C).....:	21	—	
	Fuse-link Current (A)	-	—	
Component	Fault Condition	Test Voltage (V)	Test Duration*	Comment/Result Test repeated Yes/No**
Whole PWB	Open circuit	230	30 sec	Not work
Whole PWB	Short circuit	230	Until steady	Working at max speed
SCF (prevent exceeding thermal limits) for 220-240 V				
R1	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No operation. Safe state.

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark		Verdict
R2	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No operation. Safe state.
R3	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No loss of SCF
R4	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No operation. Safe state.
R7	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No loss of SCF
R9	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No loss of SCF
R11	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No loss of SCF
R15	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No loss of SCF
RX1A	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No loss of SCF
C1	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No operation. Safe state.
C3	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No operation. Safe state.
C5	Open circuit	230	Until steady	No loss of SCF

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark		Verdict
	Short circuit	230	Until steady	No operation. Safe state.
D1	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No operation. Safe state.
D3	Open circuit	230	Until steady	No operation. Safe state.
	Short circuit	230	Until steady	No operation. Safe state.
D4	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No operation. Safe state.
D5	Open circuit	230	Until steady	No loss of SCF
	Short circuit	230	Until steady	No operation. Safe state.
Q1	Open circuit	230	Until steady	No loss of SCF
	B-C Short circuit	230	Until steady	No operation. Safe state.
	B-E Short circuit	230	Until steady	No loss of SCF
	E-C Short circuit	230	Until steady	No operation. Safe state.
Q2	Open circuit	230	Until steady	No operation. Safe state.
	B-C Short circuit	230	Until steady	No loss of SCF
	B-E Short circuit	230	Until steady	No operation. Safe state.
	E-C Short circuit	230	Until steady	No operation. Safe state.
<p>Supplementary Information:</p> <p>* Tests were continued until</p> <ul style="list-style-type: none"> - a protective device operates, or - until steady conditions are established or - an open circuit occurs. <p>** Test was repeated on a second sample due to an intentionally weak part permanently open-circuited to terminate the test.</p>				

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

18.8.1A	TABLE: Performance levels of Safety Critical Functions			P
Type and purpose of SCF	Min. PL determined based on: ^{1,2}	Min. PL	Actual PL	
Prevent exceeding thermal limits as in Clause 18	1	a	a	
Supplementary Information: ¹ IEC 62841-2-3 ² For safety critical functions not listed in Table 4 of IEC 62841-1 and provided by electronic circuits, PL values were determined using the methods of ISO 13849-1.				

18.8.1B	TABLE: Software in Safety Critical Functions			—
H.11.12.3 from IEC 60730-1:2010				
H.11.12.3	Measures to avoid errors			—
H.11.12.3.1	For controls with software Class B or C the V-model for the software life cycle was applied			P
	Measures used for software class C are inherently acceptable for software class B			N/A
	Other methods applied if they incorporate disciplined and structured processes including design and test phases			N/A
H.11.12.3.2	Specification			—
H.11.12.3.2.1	Software safety requirements			—
H.11.12.3.2.1.1	The specification of the software safety requirements includes:			—
	<ul style="list-style-type: none"> • A description of each safety related function to be implemented, including its response time(s): <ul style="list-style-type: none"> ○ functions related to the application including their related software classes ○ functions related to the detection, annunciation and management of software or hardware faults 			P
	<ul style="list-style-type: none"> • A description of interfaces between software and hardware 			P
	<ul style="list-style-type: none"> • A description of interfaces between any safety and non-safety related functions 			P
H.11.12.3.2.2	Software architecture			—

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
H.11.12.3. 2.2.1	The description of software architecture shall include the following aspects:		—
	<ul style="list-style-type: none"> Techniques and measures to control software faults/errors (refer to H.11.12.2) 		P
	<ul style="list-style-type: none"> Interactions between hardware and software 		P
	<ul style="list-style-type: none"> Partitioning into modules and their allocation to the specified safety functions 		P
	<ul style="list-style-type: none"> Hierarchy and call structure of the modules (control flow) 		P
	<ul style="list-style-type: none"> Interrupt handling 		P
	<ul style="list-style-type: none"> Data flow and restrictions on data access 		P
	<ul style="list-style-type: none"> Architecture and storage of data 		P
	<ul style="list-style-type: none"> Time based dependencies of sequences and data 		P
H.11.12.3. 2.2.2	The architecture specification was verified against the specification of the software safety requirements by static analysis. Acceptable methods are:		—
	<ul style="list-style-type: none"> Control flow analysis 		P
	<ul style="list-style-type: none"> Data flow analysis 		P
	<ul style="list-style-type: none"> Walk-throughs / design reviews 		P
H.11.12.3. 2.3.1	Based on the architecture design, software is suitably refined into modules. Software module design and coding are implemented in a way that is traceable to the software architecture and requirements		P
H.11.12.3. 2.3.2	Software code is structured		P
H.11.12.3. 2.3.3	Coded software is verified against the module specification, and the module specification is verified against the architecture specification by static analysis		P
H.11.12.3. 2.4	Design and coding standards		—
	Program design and coding standards is consequently used during software design and maintenance		P
	Coding standards specify programming practice, proscribe unsafe language features, and specify procedures for source code documentation as well as for data naming conventions		P
H.11.12.3. 3	Testing		—

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
H.11.12.3.3.1	Module design (software system design, software module design and coding)		—
H.11.12.3.3.1.1	A test concept with suitable test cases is defined based on the module design specification.		P
H.11.12.3.3.1.2	Each software module is tested as specified within the test concept		P
H.11.12.3.3.1.3	Test cases, test data and test results are documented		P
H.11.12.3.3.1.4	Code verification of a software module by static means includes such techniques as software inspections, walk-throughs, static analysis and formal proof		P
	Code verification of a software module by dynamic means includes functional testing, white-box testing and statistical testing		P
H.11.12.3.3.2	Software integration testing		P
H.11.12.3.3.2.1	A test concept with suitable test cases is defined based on the architecture design specification		P
H.11.12.3.3.2.2	The software is tested as specified within the test concept		P
H.11.12.3.3.2.3	Test cases, test data and test results are documented		P
H.11.12.3.3.3	Software validation		—
H.11.12.3.3.3.1	A validation concept with suitable test cases is defined based on the software safety requirements specification		P
H.11.12.3.3.3.2	The software is validated with reference to the requirements of the software safety requirements specification as specified within the validation concept.		P
	The software is exercised by simulation or stimulation of:		P
	• input signals present during normal operation		P
	• anticipated occurrences		P
	• undesired conditions requiring system action		P
H.11.12.3.3.3.4	Test cases, test data and test results are documented		P
H.11.12.3.4	Other Items		—

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
H.11.12.3.4.1	Tools, programming languages are assumed to be suitable if they comply with "increased confidence from use" according to IEC 61508-7, C.4.4	Only applicable for SCF with PL $\geq c$	P
H.11.12.3.4.2	Management of software versions: All versions are uniquely identified for traceability		P
H.11.12.3.4.3	Software modification		—
H.11.12.3.4.3.1	Software modifications are based on a modification request which details the following:		—
	<ul style="list-style-type: none"> the hazards which may be affected 		N/A
	<ul style="list-style-type: none"> the proposed change 		N/A
	<ul style="list-style-type: none"> the reasons for change 		N/A
H.11.12.3.4.3.2	An analysis is carried out to determine the impact of the proposed modification on functional safety.		N/A
H.11.12.3.4.3.3	A detailed specification for the modification is generated including the necessary activities for verification and validation, such as a definition of suitable test cases		N/A
H.11.12.3.4.3.4	The modification are carried out as planned		N/A
H.11.12.3.4.3.5	The assessment of the modification is carried out based on the specified verification and validation activities. This may include:		N/A
	<ul style="list-style-type: none"> a reverification of changed software modules 		N/A
	<ul style="list-style-type: none"> a reverification of affected software modules 		N/A
	<ul style="list-style-type: none"> a revalidation of the complete system 		N/A
H.11.12.3.4.3.6	All details of modification activities are documented		N/A
H.11.12.3.5	For class C control functions: One of the combinations (a–p) of analytical measures given in the columns of table H.9 is used during hardware development	Measures to avoid errors for class C not required	N/A

IEC 62841-2-3						
Clause	Requirement + Test	Result - Remark			Verdict	
20.101	TABLE: Mechanical strength of wheel guards				P	
Initial angle position for adjustable guard (°)		30				
Test voltage (V)		240 V				
Guard Type (1, 4, 6, 11, 27, 28, 29, 41 or 42).....		Wheel Type 1				
Wheel Type (A, B, C, D, E, F or G)		Guard Type G				
90% of rated no-load speed (guard types A, B, C, D, F, or G) (min ⁻¹)..		4320 min ⁻¹				
No-load speed established in 20.102.2 (guard type F) (min ⁻¹).....		-				
Guard fixing method (positive locking, screwed using friction etc.).....		Screwed using friction				
		Notch 1	Notch 2	Notch 3	Notch 4	Notch 5
Width of notch 1 (mm)		2,2	2,2	2,2	2,2	-
Pre-cut length (mm).....		57,9	57,8	57,6	57,5	-
Width of notch 2 (mm)		2,2	2,2	2,2	2,2	-
Pre-cut length (mm).....		58,1	57,6	58,2	58,3	-
Width of notch 3 (mm)		2,2	2,2	2,2	2,2	-
Pre-cut length (mm).....		58,1	58,2	57,8	58,0	-
		Burst no.1	Burst no.1	Burst no.1		
Test voltage (V)		241	241	241		
Burst speed (min ⁻¹)		4782	4781	4789		
Change of angle (°) ...		0	0	0		
Observations		The guard still on tool, no rotation	The guard still on tool, no rotation	The guard still on tool, no rotation		
Supplementary information: The guard is not adjustable.						

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

24.1	TABLE: Length of supply cord			P
Manufacturer of Cable	Cable type	Nominal cross-section used (mm ²)	Length of supply cord measured (m)	
Nexans	H07RN-F	1,5	3 m	
Ta Tun Electric	H07RN-F	1,0	3 m	
Supplementary information:				

24.5	TABLE: Nominal cross-section area of supply cord				P
Rated current (A) ¹ :	-	Current measured during clause 12ff. (A):	12,86 A (110 V); 6,87 A (220 V)	Nominal cross-section required per table 6:	1,0 mm ² ; 1,5 mm ²
Manufacturer of Cable		Cable Type	Nominal cross-section used		
Nexans		H07RN-F	1,5		
Ta Tun Electric		H07RN-F	1,0		
Supplementary information:					
¹ Current measured during test of clause 12.1, if no current rating marked.					

24.11	TABLE: Flexing and lifting				P
Weight of tool (kg):	3,4 kg	> 10 000 flexings, sample turned about 90° (Yes/No):	Yes		
Weight attached to cable or cord (kg):	3,4 kg	Cord guard slipped out after 10 completed 1 s lifts (Yes/No):	No		
Manufacturer of Cable	Cable type	No. of strands (total)	No. of strands (broken)	Deviation in %	
Nexans	H07RN-F	32	0	0	
Ta Tun Electric	H07RN-F	32	0	0	
Supplementary information:					

24.12	TABLE: Cord guard						P
Cable manufacturer	Cable type	Overall Ø of cord (mm)	Cord guard length min. (mm)	Cord guard length meas. (mm)	Mass attached (g)	Radius of curvature (mm)	
Nexans	H07RN-F	8,2	41	64	672	28	
Ta Tun Electric	H07RN-F	6,8	34	64	462	27	
Supplementary information:							

IEC 62841-2-3						
Clause	Requirement + Test				Result - Remark	Verdict
24.13	TABLE: Cord anchorage					P
Manufacturer of Cable	Cable type	Cord is pulled 25 times at (N)	Cord is twisted for 1 min at (Nm)	Cord damaged	Longitudinal displacement	Conductors movement
Nexans	H07RN-F	60	0,25	0	0	No
Ta Tun Electric	H07RN-F	60	0,25	0	0	No
Supplementary information: -						

27.1	TABLE: Torque Test for screws and nuts				P
Threaded part identification	Thread diameter (mm)	Column number (I, II, or III)	Applied torque (Nm)	Number of cycles (5 or 10)	
Terminal	0,5	II	0,5	5	
Cord anchorage	1,2	II	1,2	10	
Enclosure	1,2	II	1,2	10	
Supplementary information:					

28.1	TABLE: Clearance And Creepage Distance Measurements						P
clearance cl and creepage distance cr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required cr (mm)	cr (mm)	
L/N polarity	-	240	2,5	6,8	3,0	6,8	
Stator winding and motor core	-	240	2,0	4,3	2,0	4,3	
Rotor winding and motor core	-	240	2,0	3,9	2,0	3,9	
Commutator and bearing	-	240	8,0	8,5	8,0	8,5	
Internal wire and enclosure	-	240	4,0	6,2	4,0	6,2	
Winding and bearing	-	240	6,0	>10	6,0	>10	
Supplementary information: - Creepage and clearance values of Table 12 do not apply to crossover points of motor windings.							

28.2	TABLE: Distance Through Insulation Measurements				P
Distance through insulation dti at/of:	U r.m.s. (V)	Test voltage (V)	Required dti (mm)	dti (mm)	
Metal parts separated by supplementary insulation	240	-	1	1,5	
Metal parts separated by reinforced insulation	240	-	2	-	
Supplementary information:					

IEC 62841-2-3					
Clause	Requirement + Test			Result - Remark	Verdict
C.2A	TABLE: Leakage Current of the non-operating tool as per clause 14.1				P
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)
L/N and body	240	50	OFF	0,25	0,01/0,01
L/N and body	120	50	OFF	0,25	0,01/0,01
Supplementary Information:					

C.2B	TABLE: Leakage Current of the non-operating tool as per clause 14.4				N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)
Supplementary Information:					

C.3A	TABLE: Leakage Current of the operating tool as per clause 12.1				P
Points of application	Test voltage (1.06 X rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF ¹)	Allowed leakage current (mA)	Measured leakage (mA)
L/N and body	254	50	ON	0,25	0,01/0,01
L/N and body	127	50	ON	0,25	0,01/0,01
Supplementary Information:					

C.3B	TABLE: Leakage Current of the operating tool as per clause 14.3				N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)
Supplementary Information:					

C.3C	TABLE: Leakage Current of the operating tool as per clause 18.5.1				P
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position (ON /OFF ¹)	Allowed leakage current (mA)	Measured leakage (mA)
L/N and body	240	50	ON	2	0,01
L/N and body	120	50	ON	2	0,005
Supplementary Information:					

IEC 62841-2-3					
Clause	Requirement + Test			Result - Remark	Verdict
C.3D	TABLE: Leakage Current of the operating tool as per clause 18.5.4				N/A
Points of application	Test voltage (rated V)	Freq. (Hz)	Selector Switch Position	Allowed leakage current (mA)	Measured leakage (mA)
Supplementary Information:					

D.2	TABLE: Dielectric Strength			P
Test voltage applied between:		Test during or after clause	Test potential applied (V)	Breakdown / flashover (Yes/No)
- windings and metal core of the motor field over basic insulation		12.6	1250	N/A
- commutator and metal core of the motor armature over basic insulation		12.6	1250	N/A
- metal core and motor armature spindle of the motor armature over supplementary insulation		12.6	2500	N/A
- commutator and motor armature spindle over reinforced insulation		12.6	3750	N/A
- between live parts and other metal parts over basic insulation		14.1	1250	No
- between inaccessible metal parts and accessible parts over supplementary insulation		14.1	2500	No
- between live parts and accessible parts over reinforced insulation		14.1	3750	No
- accessible metal parts in class I tools and the supply cord wrapped with metal foil		14.1	1250	N/A
- accessible metal parts in class II tools and the supply cord wrapped with metal foil		14.1	1750	No
- between live parts and other metal parts over basic insulation		14.2.2	1250	N/A
- between inaccessible metal parts and accessible parts over supplementary insulation		14.2.2	2500	N/A
- between live parts and accessible parts over reinforced insulation		14.2.2	3750	N/A
- live parts and accessible parts over basic insulation		14.3	1250	N/A
- live parts and accessible parts over reinforced insulation		14.3	3750	N/A
- live parts and accessible parts over basic insulation		14.4	1250	N/A
- live parts and accessible parts over reinforced insulation		14.4	3750	N/A

IEC 62841-2-3				
Clause	Requirement + Test	Result - Remark	Verdict	
	- between live parts and other metal parts over basic insulation	17.2 and 17.3	937,5	No
	- between inaccessible metal parts and accessible parts over supplementary insulation	17.2 and 17.3	1875	No
	- between live parts and accessible parts over reinforced insulation	17.2 and 17.3	2812,5	No
	- live parts and accessible parts over basic insulation	18.3 and 18.4	1250	No
	- live parts and accessible parts over reinforced insulation	18.3 and 18.4	3750	No
	- live parts and accessible parts not grounded, if the tool does not operate anymore	18.5.1	1500	N/A
	- live parts and accessible parts not grounded, if the tool still operates	18.5.1	2500	No
	- commutator segments and armature shaft in series motors with class II armature construction	18.5.2	1500	N/A
	- live parts and accessible parts not grounded, if any winding is open circuited	18.5.4	1500	N/A
	- live parts and accessible parts not grounded, if no windings are open circuited	18.5.4	2500	N/A
	- live parts and accessible parts over basic insulation	20.2 to 20.4	1250	No
	- live parts and accessible parts over reinforced insulation	20.2 to 20.4	3750	No
	- between the handles and grasping surfaces in contact with foil and the output shaft of the tool	20.5	1250	No
	- between live parts and other metal parts over basic insulation	21.12	937,5	N/A
	- between inaccessible metal parts and accessible parts over supplementary insulation	21.12	1875	N/A
	- between live parts and accessible parts over reinforced insulation	21.12	2812,5	N/A
	- shafts of operating knobs, handles, levers etc. and their insulating covering wrapped in metal foil	21.29	1250	N/A
	- live parts and accessible parts over basic insulation	22.6	1250	N/A
	- live parts and accessible parts over reinforced insulation	22.6	3750	N/A
	- basic insulation	28.2.b)	1250	N/A
	- supplementary insulation	28.2.b)	2500	N/A
	- reinforced insulation	28.2.b)	3750	N/A
	- over insulation protecting from electric shock	K.9.5	750	N/A
Supplementary information:				

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

K.12.1	TABLE: Normal Temperature Test for Battery Tool		N/A
Ambient temperature (°C)			—
Measurement at:		ΔT measured (K)	ΔT Limit (K)
Enclosure, outside, gripping surface			
Enclosure , outside, near motor			
Enclosure outside, gear housing			
Enclosure, inside, near motor			
Enclosure, inside, near heat sink			
Internal wiring			
Switch body			
External, metal gear case			
Battery terminal support			
Battery pack			
Supplementary Information: Status of overload protector at end of test [] No change [] Opened during the Test [] N/A			

K.12.201	TABLE: Lithium-ion charging systems – Normal Temperature Test						N/A
Measurement at:	Temperature normal charging (°C)	Cell-voltage (V)		Temperature imbalanced cells charging (°C)	Cell-voltage (V)		Allowed Limit (°C)
		At start of the test	Max. during test		At start of the test	Max. during test	
BATTERY PACK:		CELL:		CHARGER:			
Max. allowed cell-charging-current:				measured charging-current ¹⁾ :			
Ambient		—			—		—
Cell 1							
Cell 2							
Cell 3							
Cell 4							
Cell 5							
Cell X							
Supplementary Information: ¹⁾ If multi-layer battery the charging current has to be divided through the number of layers.							

IEC 62841-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
K.12.201	TABLE: Lithium-ion charging systems – Normal Temperature Test						N/A
Measurement at:	Temperature normal charging (°C)	Cell-voltage (V)		Temperature imbalanced cells charging (°C)	Cell-voltage (V)		Allowed Limit (°C)
		At start of the test	Max. during test		At start of the test	Max. during test	
All technical information are provided by manufacturer.							

K.18.1	TABLE: Battery Tool Abnormal Operation					N/A
	Resistance applied (max. 10 mΩ)	Protective device operated during first test?	Test repeated 2 more times with device in place?	Test repeated 1 more time with device bridged?	Explosion, charring or burning of test materials?	
a) Terminals of detachable battery pack with exposed terminals shorted						
	Reaction during test:					
b) Motor terminals shorted						
	Reaction during test:					
c) Motor rotor locked						
	Reaction during test:					
d) Cord between battery tool and separable battery pack shorted						
	Reaction during test:					
e) Cord between tool and charger shorted						
	Reaction during test:					
f) Any two uninsulated parts of opposite polarity in battery tools shorted						
	Reaction during test:					
Supplementary Information:						

IEC 62841-2-3									
Clause	Requirement + Test					Result - Remark			Verdict
K.18.201	TABLE: Lithium-ion charging systems – Abnormal Operation								N/A
Abnormal condition: a) Components in the charging system faulted as in 18.6.1 b) to f)									
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Abnormal condition: b) One cell 50% charged in a fully discharged battery									
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Abnormal condition: c) Charging of a series configured battery with all cells 50% charged, one cell shorted									
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]

IEC 62841-2-3									
Clause	Requirement + Test							Result - Remark	Verdict
K.18.201	TABLE: Lithium-ion charging systems – Abnormal Operation								N/A
Abnormal condition:		d) Short across a component or between adjacent PCB tracks							
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Supplementary Information: ¹⁾ Including cell information if necessary One of conditions ²⁾ or ³⁾ is sufficient to achieve compliance with this subclause.									

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

K.18.8	TABLE: Performance levels of Safety Critical Functions			N/A
Type and purpose of SCF	Min. PL determined based on: ^{1,2}	Min. PL	Actual PL	
Power switch – prevent unwanted switch-on for grinders with a rated capacity ≤ 55 mm	1	c		
Power switch – prevent unwanted switch-on for disc-type sanders and disc-type polishers	1	b		
Power switch – provide desired switch-off for grinders with a rated capacity exceeding 55 mm	1	c		
Power switch – provide desired switch-off for grinders with a rated capacity ≤ 55 mm, disc-type sanders and disc-type polishers	1	b		
Provide desired direction of rotation for grinders	1	c		
Prevent output speed from exceeding 120 % of rated no-load speed without accessories mounted for grinders and disc-type sanders	1	c		
Prevent output speed from exceeding 130 % of rated no-load speed without accessories mounted for disc-type polishers	1	b		
Prevent exceeding thermal limits as in Clause 18	1	a		
Prevent unwanted lock-on of the power switch function	1	b		
Restart prevention as required by K.21.18.1.1	1	b		
Lock-off function as required by 21.18.1.2	1	c		
Prevent self-resetting as required in 23.3	1	c		
Supplementary Information: ¹ IEC 62841-2-3 ² For safety critical functions not listed in Table 4 of IEC 62841-1 and provided by electronic circuits, PL values were determined using the methods of ISO 13849-1.				

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

K.18.202	TABLE: Lithium-ion battery short circuit					N/A
Battery pack ¹⁾	Sample	Explosion occurred? [YES / NO]	Charring or burning of gauze or tissue? [YES / NO]	Cell vented ²⁾ [YES / NO]	Reaction during test	
	1/3					
	2/3					
	3/3					

Supplementary Information:
¹⁾ Including cell information if necessary
²⁾ Venting of cells is acceptable.

K.19.202	TABLE: Mechanical hazards - Venting		N/A
Battery pack ¹⁾	Total area of openings > 20 mm ² ²⁾ [YES / NO]	Pressure test - rupturing of enclosure? ³⁾ [YES / NO]	

Supplementary information:
¹⁾ Including cell information if necessary
One of conditions ²⁾ or ³⁾ is sufficient to achieve compliance with this subclause.

IEC 62841-2-3											
Clause	Requirement + Test							Result - Remark			Verdict
K.20.3.1	TABLE: Mechanical Strength – Drop test										N/A
Test subject ¹⁾	Drop height [m]	Voltage prior test [V _{DC}]	Voltage after test [V _{DC}]	Deviation [%]	Discharging possible [YES/NO]	Recharging possible [YES/NO]	Damage to the cell vent [YES/ NO]	Meet the requirements of K.9 [YES/ NO]	Meet the requirements of K.19 [YES/ NO]	Meet the requirements of K.18.1f) ²⁾ [YES/ NO]	Meet the requirements of K.28.1 ²⁾ [YES/ NO]
Supplementary information: ¹⁾ Can be: tool itself, tool with battery, battery itself. Indicate what was tested. One of conditions ²⁾ is sufficient to achieve compliance with this subclause.											

IEC 62841-2-3											
Clause	Requirement + Test							Result - Remark			Verdict
K.20.3.2	TABLE: Mechanical Strength – Impact test										N/A
Test subject ¹⁾	Drop height [m] ²⁾	Voltage prior test [V _{DC}]	Voltage after test [V _{DC}]	Deviation [%]	Discharging possible [YES/NO]	Recharging possible [YES/NO]	Damage to the cell vent [YES/ NO]	Meet the requirements of K.9 [YES/ NO]	Meet the requirements of K.19 [YES/ NO]	Meet the requirements of K.18.1f) ³⁾ [YES/ NO]	Meet the requirements of K.28.1 ³⁾ [YES/ NO]
Supplementary information: ¹⁾ Can be: tool itself, tool with battery, battery itself. Indicate what was tested. ²⁾ Only relevant for detachable battery packs or separable battery packs with a mass less than 3 kg. One of conditions ³⁾ is sufficient to achieve compliance with this subclause.											

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
L.12	TABLE: Normal Temperature Test for Battery Tool		N/A
Ambient temperature (°C)			—
Measurement at:		ΔT measured (K)	ΔT Limit (K)
Enclosure, outside, gripping surface			
Enclosure, outside, near motor			
Enclosure outside, gear housing			
Enclosure, inside, near motor			
Enclosure, inside, near heat sink			
Internal wiring			
Switch body			
External, metal gear case			
Battery terminal support			
Battery pack			
Supplementary Information: Status of overload protector at end of test [] No change [] Opened during the Test [] N/A			

L.12.201	TABLE: Lithium-ion charging systems – Normal Temperature Test						N/A
Measurement at:	Temperature normal charging (°C)	Cell-voltage (V)		Temperature imbalanced cells charging (°C)	Cell-voltage (V)		Allowed Limit (°C)
		At start of the test	Max. during test		At start of the test	Max. during test	
BATTERY PACK:		CELL:		CHARGER:			
Max. allowed cell-charging-current:				measured charging-current ¹⁾ :			
Ambient		—			—		—
Cell 1							
Cell 2							
Cell 3							
Cell 4							
Cell 5							
Cell X							
Supplementary Information: ¹⁾ If multi-layer battery the charging current has to be divided through the number of layers. All technical information are provided by manufacturer.							

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

L.18.1	TABLE: Battery Tool Abnormal Operation					N/A
Abnormal conditions	Resistance applied (max. 10 mΩ)	Protective device operated during first test?	Test repeated 2 more times with device in place?	Test repeated 1 more time with device bridged?	Explosion, charring or burning of test materials?	
a) Terminals of detachable battery pack with exposed terminals shorted						
b) Motor terminals shorted						
c) Motor rotor locked						
d) Cord between battery tool and separable battery pack shorted						
e) Cord between tool and charger shorted						
f) Any two uninsulated parts of opposite polarity in battery tools shorted						
Supplementary Information:						

L.18.201	TABLE: Battery Tool Abnormal Operation				N/A
Abnormal conditions	Explosion occurred?	Charring or burning of test materials?	Protector Operated?	Test repeated 3 more times?	
a) Terminals of detachable battery pack with exposed terminals shorted					
Reaction during test:					
b) Motor terminals shorted					
Reaction during test:					
c) Motor rotor locked					
Reaction during test:					
d) Cord between battery tool and separable battery pack shorted					
Reaction during test:					
e) Cord provided the tool and the charger shorted					
Reaction during test:					
f) Any two uninsulated parts of opposite polarity in battery tools shorted					
Reaction during test:					
Supplementary Information:					

IEC 62841-2-3									
Clause	Requirement + Test					Result - Remark			Verdict
L.18.202	TABLE: Lithium-ion charging systems – Abnormal Operation								N/A
Abnormal condition:		a) Components in the charging system faulted as in 18.6.1 b) to f)							
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Abnormal condition:		b) One cell 50% charged in a fully discharged battery							
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Abnormal condition:		c) Charging of a series configured battery with all cells 50% charged, one cell shorted							
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]

IEC 62841-2-3									
Clause	Requirement + Test							Result - Remark	Verdict
L.18.202	TABLE: Lithium-ion charging systems – Abnormal Operation								N/A
Abnormal condition:		d) Short across a component or between adjacent PCB tracks							
Charger	Battery pack ¹⁾	Affected component	Build in failure	Reaction during test	Explosion occurred? [YES / NO]	Charring or burning of test materials? [YES / NO]	Upper limit charging voltage exceeded by ≤ 150 mV ²⁾ [YES / NO]	If > 150 mV then charging system permanently disabled? ³⁾ [YES / NO]	Cell vent damaged? [YES / NO]
Supplementary Information: ¹⁾ Including cell information if necessary One of conditions ²⁾ or ³⁾ is sufficient to achieve compliance with this subclause.									

IEC 62841-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

L.18.203	TABLE: Lithium-ion battery short circuit					N/A
Battery pack ¹⁾	Sample	Explosion occurred? [YES / NO]	Charring or burning of gauze or tissue? [YES / NO]	Cell vented ²⁾ [YES / NO]	Reaction during test	
	1/3					
	2/3					
	3/3					

Supplementary Information:
¹⁾ Including cell information if necessary
²⁾ Venting of cells is acceptable.

L.19.202	TABLE: Mechanical hazards - Venting		N/A
Battery pack ¹⁾	Total area of openings > 20 mm ² ²⁾ [YES / NO]	Pressure test - rupturing of enclosure? ³⁾ [YES / NO]	

Supplementary information:
¹⁾ Including cell information if necessary
One of conditions ²⁾ or ³⁾ is sufficient to achieve compliance with this subclause.

IEC 62841-2-3													
Clause	Requirement + Test										Result - Remark	Verdict	
L.20.202.1	TABLE: Mechanical Strength – Drop test												N/A
Test subject ¹⁾	Drop height [m]	Voltage prior test [V _{DC}]	Voltage after test [V _{DC}]	Deviation [%]	Discharging possible [YES/NO]	Recharging possible [YES/NO]	Damage to the cell vent [YES/ NO]	Meet the requirements of L.9 [YES/ NO]	Meet the requirements of L.19 [YES/ NO]	Meet the requirements of L.28.1 [YES/ NO]	Meet the requirements of L.18.201 ²⁾	Meet the requirements of L.28.201 ²⁾	
Supplementary information: ¹⁾ Can be: tool itself, tool with battery, battery itself. Indicate what was tested. One of conditions ²⁾ is sufficient to achieve compliance with this subclause.													

IEC 62841-2-3													
Clause	Requirement + Test										Result - Remark	Verdict	
L.20.202.2	TABLE: Mechanical Strength – Impact test												N/A
Test subject ¹⁾	Drop height [m] ²⁾	Voltage prior test [V _{DC}]	Voltage after test [V _{DC}]	Deviation [%]	Discharging possible [YES/NO]	Recharging possible [YES/NO]	Damage to the cell vent [YES/ NO]	Meet the requirements of L.9 [YES/ NO]	Meet the requirements of L.19 [YES/ NO]	Meet the requirements of L.28.1 [YES/ NO]	Meet the requirements of L.18.201 ³⁾	Meet the requirements of L.28.201 ³⁾	
Supplementary information: ¹⁾ Can be: tool itself, tool with battery, battery itself. Indicate what was tested. ²⁾ Only relevant for detachable battery packs or separable battery packs with a mass less than 3 kg. One of conditions ³⁾ is sufficient to achieve compliance with this subclause.													

IEC 62841-2-3					
Clause	Requirement + Test		Result - Remark		Verdict
TABLE: Critical components information					
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
Supply cord for 110-120 V	Nexans	H07RN-F	2 X 1,5 mm ²	IEC 60245	LCIE
Alternative supply cord for 110-120 V	Ta Tun Electric	H07RN-F	2 X 1,5 mm ²	IEC 60245	VDE
Supply cord for 220-240 V	Ta Tun Electric	H07RN-F	2 X 1,0 mm ²	IEC 60245	VDE
Alternative supply cord for 220-240 V	Nexans	H07RN-F	2 X 1,0 mm ²	IEC 60245	LCIE
UK type power plug	Ta An Electrical	TP-66	13 A; 250 Vac (Fuse include)	BS 1363	ASTA
Power plug	Ta An Electrical	TP-61	250 Vac; 16 A	IEC 60884	VDE
Alternative plug	Ta An Electrical	TP-41	250 Vac; 16 A	IEC 60884	VDE
Alternative plug	Ching Cheng Wire Material	EL-208	250 Vac; 16 A	IEC 60884	SABS
Power plug for 220-240 Vac only	Ta An Electrical	TP-37	250 Vac; 10 A	IEC 60884	SEV
Alternative plug for 220-240 Vac only	Ta An Electrical	TP-35	250 Vac; 10 A	IEC 60884	IRAM
Alternative plug for 220-240 Vac only	Ta An Electrical	TP-21	250 Vac; 10 A	IEC 60884	SAA
Alternative plug for 220-240 Vac only	Ta An Electrical	TP-22	250 Vac; 10 A or 15 A	IEC 60884	SAA
Power plug only for 110-120 Vac only	Ningbo Znpon	P1134	130 Vac; 16 A	IEC 60309	SEMKO
Alternative for 110-120 Vac only	Ta An Electrical	TP-22	250 Vac; 15 A	IEC 60884	SAA
Switch for 220-240 V	Zhejiang Jiaben Electronics	FA2-8/1BE(E)	250 Vac; 8(8) A; 5E4	IEC 61058-1	TUV
Switch for 110-120 V	Zhejiang Jiaben Electronics	FA2-6D-2113-B	125 Vac; 16(16) A; 5E4	IEC 61058-1	TUV
X2 Capacitor	Carli Electronics	MPX	0,22 µF; 275 Vac	IEC 60384-14	VDE
Alternative capacitor	Aid Electronics	MEX	0,22 µF; 275 Vac	IEC 60384-14	VDE

IEC 62841-2-3					
Clause	Requirement + Test			Result - Remark	Verdict
X2 Capacitor	Carli Electronics	MPX	0,1 µF; 275 Vac	IEC 60384-14	VDE
Alternative capacitor	Aid Electronics	MEX	0,1 µF; 275 Vac	IEC 60384-14	VDE
Electronic device for 220-240 V	LONG CHANG	CCP-508	220-240 V PCB: 1,6 mm (UL/E94733)	IEC 62841	Tested in Appliance
Electronic device for 110-120 V	LONG CHANG	CCP-508	110-120 V; PCB: 1,6 mm (UL/E94733)	IEC 62841	Tested in Appliance
<p>1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>2) License available upon request.</p>					

Photos:
















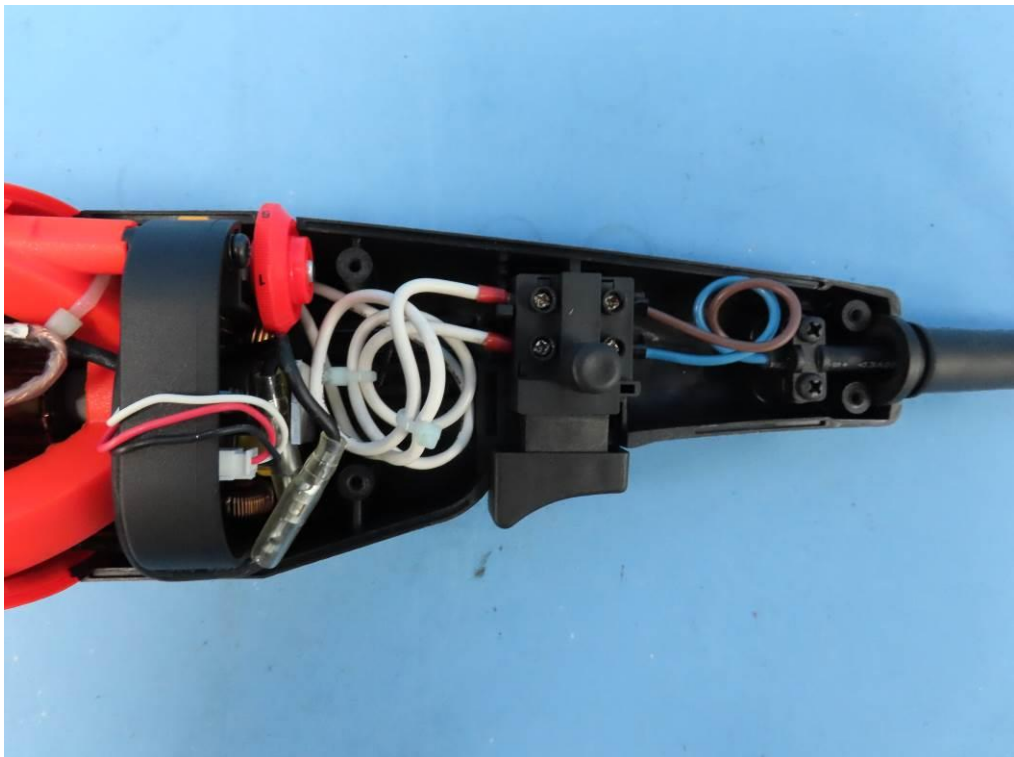

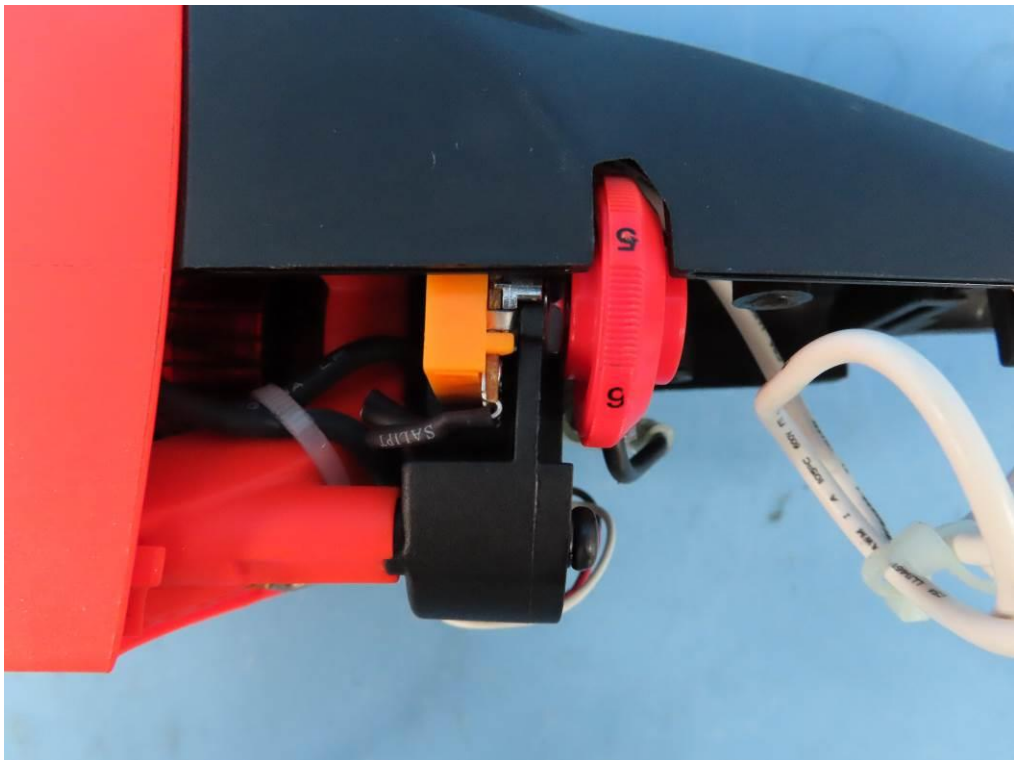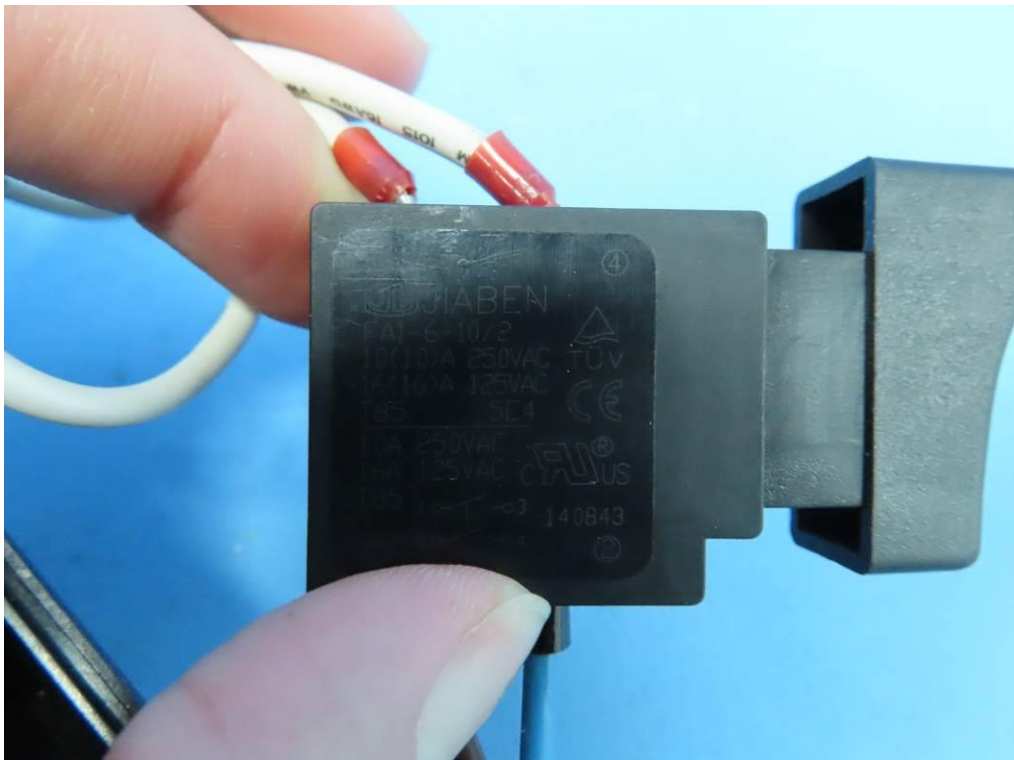

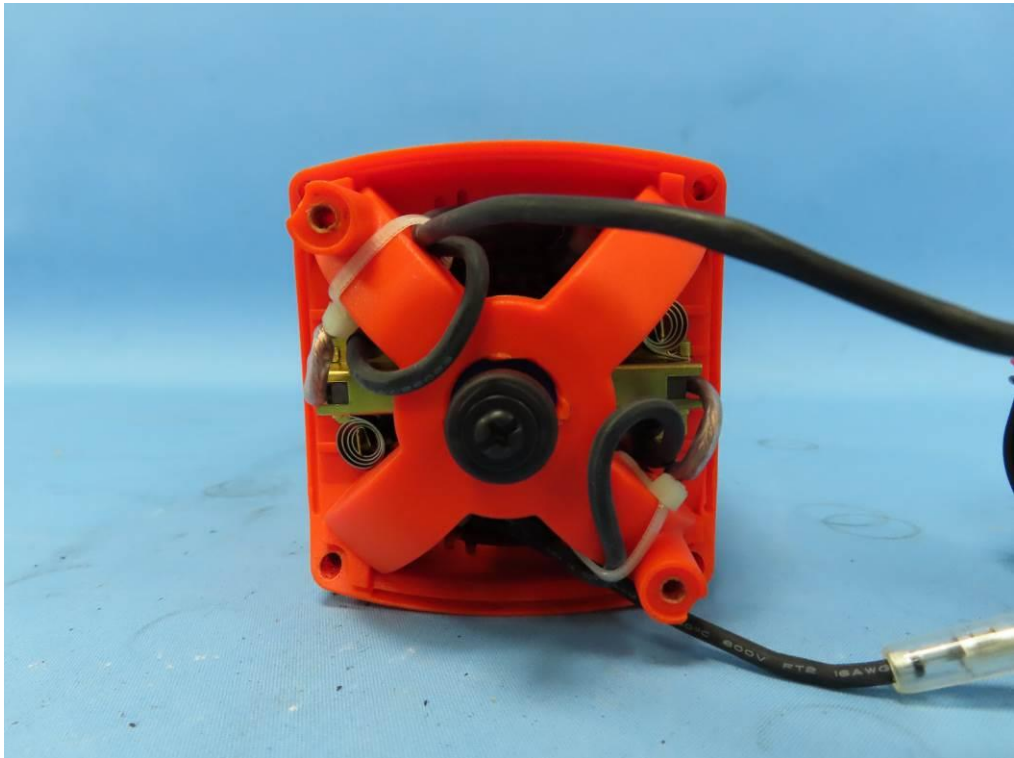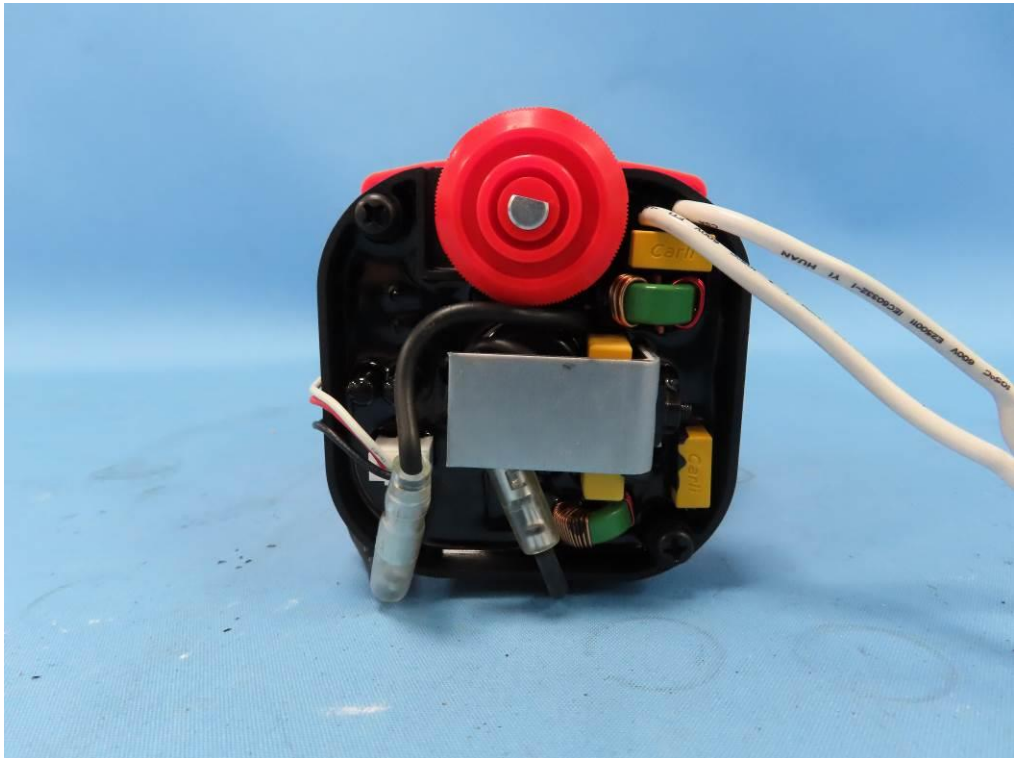



-----END-----