



-page 1 of 21-

3173043.50 V1.1

EMC Test report for Concrete Saw(Cut-off Machine)

**Model: C16; C405; CS16; CS405; PC16; PC405; PS16; PS405;
QHS-400; KCS400**

Shanghai, date of issue: 2016-10-18

Author : Jeremy Cai

By order of LEE YEONG INDUSTRIAL CO., LTD.

Jeremy Cai

Richie Tang

author : Jeremy Cai

reviewed : Richie Tang

B 18 pages 0 annexes (sec)

SH-F-PC4-005 v1.1

DEKRA Testing and Certification (Shanghai) Ltd.
DOCUMENT

CONTENTS

| | | |
|-----|---|----|
| 1 | Conclusion | 3 |
| 1.1 | Model description..... | 3 |
| 1.2 | Environment..... | 5 |
| 1.3 | Classification..... | 5 |
| 2 | Summary | 6 |
| 2.1 | Applied standards | 6 |
| 2.2 | Overview of results | 6 |
| 3 | General Information | 7 |
| 3.1 | Customer Information..... | 7 |
| 3.2 | Test data..... | 8 |
| 3.3 | Environmental conditions | 8 |
| 3.4 | Measurement Uncertainty | 8 |
| 4 | Emission test results | 9 |
| 4.1 | Mains conducted disturbance voltage | 9 |
| 4.2 | Disturbance power..... | 12 |
| 4.3 | Harmonic currents..... | 15 |
| 4.4 | Voltage fluctuations (Flicker) | 18 |
| 5 | Identification of the equipment under test..... | 20 |

1 CONCLUSION

The equipment under test (EUT) does meet the essential requirements of the EMC Directive 2014/30/EU.

The conclusion and results stated in this test report are based on a non-recurrent examination of sample(s) provided by the applicant.

1.1 Model description

The apparatus as supplied for the test are concrete saws (cut-off machine) intended for residential use. The EUTs have neither electronic control nor earth connection.

According to the declaration from manufacturer, models C16; C405; CS16; CS405; PC16; PC405; PS16; PS405; QHS-400; KCS400 are identical except the model name.

Therefore, model C16 was selected for the full tests and the results are also representative for other models as well.



Figure 1 Overview

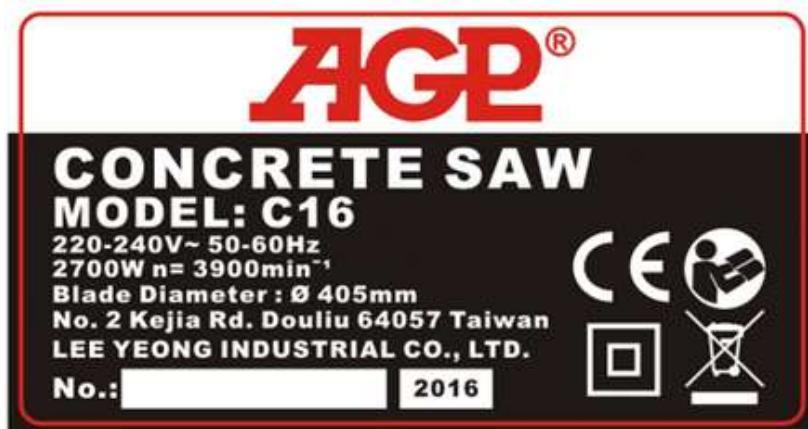


Figure 2 Label

1.2 Environment

The requirements and standards apply to equipment intended for use in:

| | |
|---|---|
| ✓ | Residential (domestic) environment |
| | Commercial and light-industrial environment |
| | Industrial environment |
| | Medical environment |

1.3 Classification

The standard EN 55014-2 is subdivided in four categories. For each category, the specific immunity requirements are formulated.

| | | |
|---|-------------------|--|
| ✓ | Category 1 | Apparatus containing no electronic control circuitry |
| | Category 2 | Apparatus containing electronic control circuitry with no internal clock or oscillator frequency higher than 15 MHz. |
| | Category 3 | Battery powered apparatus containing electronic control circuitry with no internal clock higher than 15 MHz. |
| | Category 4 | All other apparatus. |

2 SUMMARY

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

2.1 Applied standards

| Standard | Year | Title |
|--------------|------|---|
| EN 55014-1 | 2006 | Emission – Electrical motor-operated and thermal appliances for household and similar purposes, electrical tools and similar electrical apparatus |
| A1 | 2009 | |
| A2 | 2011 | |
| EN 55014-2 | 1997 | Immunity - Household appliances, electric tools and similar |
| A1 | 2001 | |
| A2 | 2008 | |
| EN 61000-3-2 | 2014 | Limits for harmonic currents emissions |
| EN 61000-3-3 | 2013 | Limitation of voltage fluctuations and flicker |

2.2 Overview of results

| Emission tests | Result |
|--|--------|
| Mains conducted disturbance voltage | PASS |
| Disturbance power | PASS |
| Harmonic current emission | PASS |
| Limitation of voltage fluctuations (flicker) | PASS |

| Immunity tests | Result |
|---|--------|
| Electrostatic Discharges (ESD) | N/A* |
| Electrical fast transient (EFT) | N/A* |
| Surge transients | N/A* |
| Conducted RF disturbances | N/A* |
| Power supply voltage interruptions & dips | N/A* |

Note*: The equipment is classified as category 1 equipment according to EN 55014-2; no immunity test is applicable.

3 GENERAL INFORMATION

| | |
|----------------------|---|
| Equipment under test | Concrete Saw(Cut-off Machine) |
| Trade mark | AGP |
| Tested Type | C16 |
| Representative Types | C405; CS16; CS405; PC16; PC405; PS16; PS405; QHS-400; KCS400 |
| Ratings | 220-240 V; 50-60 Hz; 2700 W; n=3 900 min-1; ø405 mm Class II |

3.1 Customer Information

| | |
|-----------|---|
| Applicant | LEE YEONG INDUSTRIAL CO., LTD. |
| Address | No.2, Kejia Rd., Douliu City, Yunlin County 64057, Taiwan |

| | |
|--------------|---|
| Manufacturer | LEE YEONG INDUSTRIAL CO., LTD. |
| Address | No.2, Kejia Rd., Douliu City, Yunlin County 64057, Taiwan |

| | |
|---------|---|
| Factory | LEE YEONG INDUSTRIAL CO., LTD. |
| Address | No.2, Kejia Rd., Douliu City, Yunlin County 64057, Taiwan |

3.2 Test data

| | |
|---------------------------------|--|
| Location | QuieTek Technology (Suzhou) Co., Ltd. |
| Address | No. 99, Hongye Road, Suzhou Industrial Park Loufeng Hi-New-Tech Development Area, Suzhou City, China |
| Date of receipt of test item | Jan. 2016 (sample(s) provided by applicant) |
| Date(s) of performance of tests | Jan. 2016 |
| Supervised by | Richie Tang |

3.3 Environmental conditions

Tests have been performed in a controlled laboratory environment, where the environmental conditions are maintained within the applicable ranges.

| | |
|-----------------------|---------------|
| Ambient temperature | 15 °C – 35 °C |
| Relative Humidity air | 30% - 60% |

3.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: $U = 3.22 \text{ dB}$

Disturbance Power Expanded Uncertainty: $U = 2.38 \text{ dB}$

4 EMISSION TEST RESULTS

4.1 Mains conducted disturbance voltage

| | | | |
|-----------------|--------------------|---------|-------------|
| Standard | EN 55014-1 (Tools) | | |
| Frequency [MHz] | QP [dB(μV)] | | AV [dB(μV)] |
| 0,15 – 0,35 | 66 | – 59 *) | 59 – 49 *) |
| 0,35 – 5 | 59 | | 49 |
| 5 – 30 | 64 | | 54 |


*) Limits decreasing linearly with the logarithm of the frequency

| | | |
|---|------------------------------------|-----------------|
| | Rated power below 700 W | Limits as above |
| | Rated power between 700 and 1000 W | Limits +4 dB |
| ✓ | Rated power above 1000 W | Limits +10 dB |

| | |
|-------------|----------|
| Port | AC mains |
| Test method | LISN |
| Mode | On mode |


Results

Line

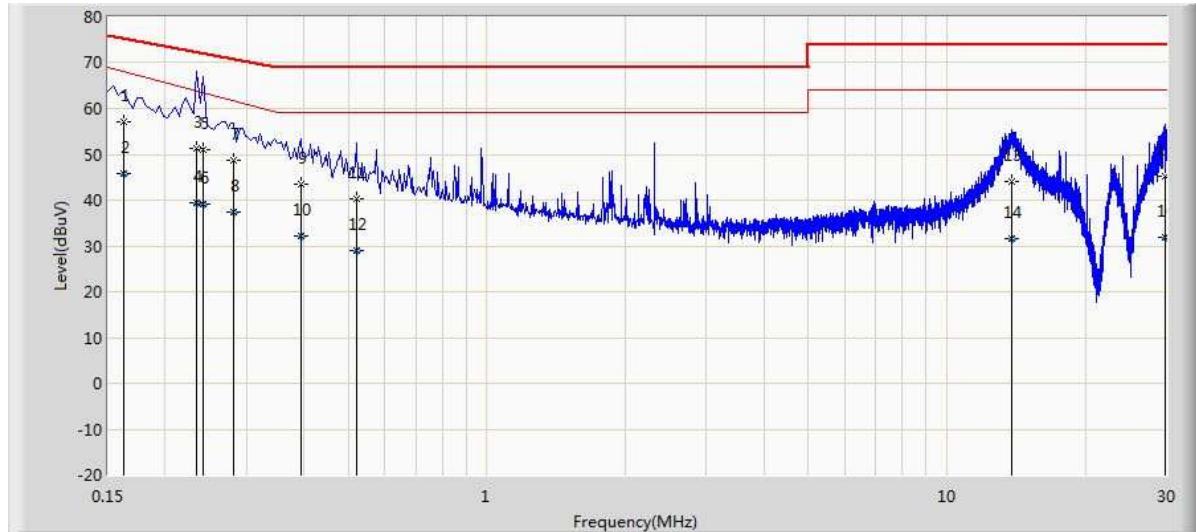

| No | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1 | 0.162 | 57.087 | 47.467 | -18.277 | 75.364 | 9.597 | 0.023 | 0.000 | QP |
| 2 | 0.162 | 45.846 | 36.226 | -22.246 | 68.092 | 9.597 | 0.023 | 0.000 | AV |
| 3 | 0.234 | 51.309 | 41.689 | -21.017 | 72.326 | 9.590 | 0.030 | 0.000 | QP |
| 4 | 0.234 | 39.465 | 29.845 | -24.287 | 63.752 | 9.590 | 0.030 | 0.000 | AV |
| 5 | 0.242 | 51.042 | 41.423 | -21.006 | 72.048 | 9.590 | 0.029 | 0.000 | QP |
| 6 | 0.242 | 39.191 | 29.572 | -24.164 | 63.355 | 9.590 | 0.029 | 0.000 | AV |
| 7 | 0.282 | 48.804 | 39.182 | -21.981 | 70.785 | 9.590 | 0.032 | 0.000 | QP |
| 8 | 0.282 | 37.320 | 27.698 | -24.230 | 61.550 | 9.590 | 0.032 | 0.000 | AV |
| 9 | 0.394 | 43.547 | 33.917 | -25.453 | 69.000 | 9.590 | 0.040 | 0.000 | QP |
| 10 | 0.394 | 32.030 | 22.401 | -26.970 | 59.000 | 9.590 | 0.040 | 0.000 | AV |
| 11 | 0.522 | 40.295 | 30.659 | -28.705 | 69.000 | 9.590 | 0.047 | 0.000 | QP |
| 12 | 0.522 | 28.853 | 19.216 | -30.147 | 59.000 | 9.590 | 0.047 | 0.000 | AV |
| 13 | 13.846 | 44.169 | 34.276 | -29.831 | 74.000 | 9.648 | 0.245 | 0.000 | QP |
| 14 | 13.846 | 31.698 | 21.805 | -32.302 | 64.000 | 9.648 | 0.245 | 0.000 | AV |
| 15 | 29.778 | 45.220 | 35.293 | -28.780 | 74.000 | 9.561 | 0.366 | 0.000 | QP |
| 16 | 29.778 | 31.806 | 21.879 | -32.194 | 64.000 | 9.561 | 0.366 | 0.000 | AV |

Neutral

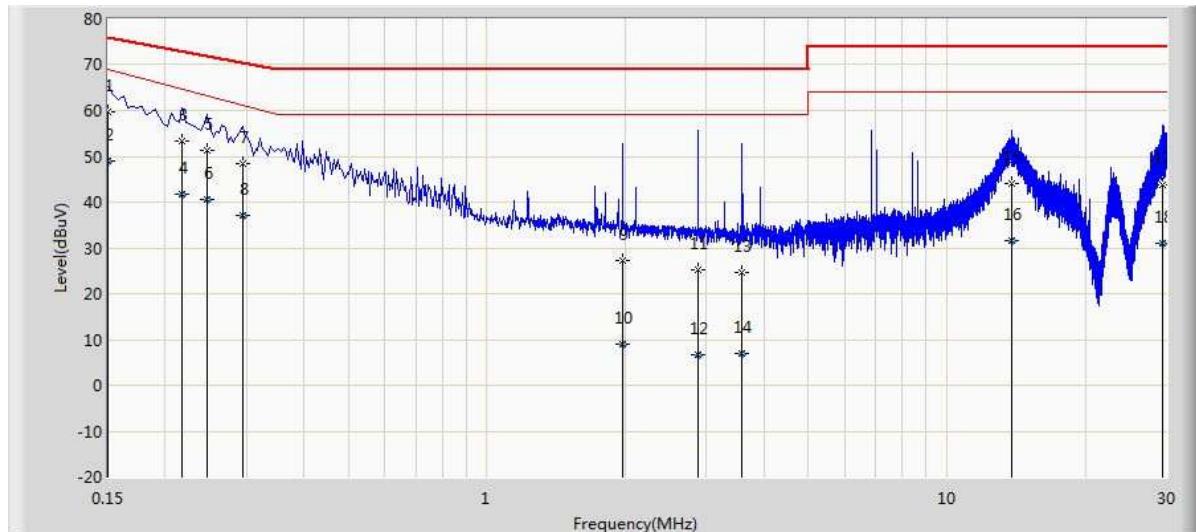

| No | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1 | 0.150 | 59.738 | 50.137 | -16.262 | 76.000 | 9.580 | 0.021 | 0.000 | QP |
| 2 | 0.150 | 49.020 | 39.419 | -19.980 | 69.000 | 9.580 | 0.021 | 0.000 | AV |
| 3 | 0.218 | 53.246 | 43.643 | -19.665 | 72.911 | 9.571 | 0.032 | 0.000 | QP |
| 4 | 0.218 | 41.766 | 32.163 | -22.822 | 64.588 | 9.571 | 0.032 | 0.000 | AV |
| 5 | 0.246 | 51.320 | 41.718 | -20.593 | 71.913 | 9.572 | 0.030 | 0.000 | QP |
| 6 | 0.246 | 40.435 | 30.833 | -22.726 | 63.161 | 9.572 | 0.030 | 0.000 | AV |
| 7 | 0.294 | 48.528 | 38.923 | -21.912 | 70.440 | 9.574 | 0.031 | 0.000 | QP |
| 8 | 0.294 | 37.077 | 27.472 | -23.981 | 61.058 | 9.574 | 0.031 | 0.000 | AV |
| 9 | 1.974 | 27.125 | 17.452 | -41.875 | 69.000 | 9.590 | 0.083 | 0.000 | QP |
| 10 | 1.974 | 9.002 | -0.671 | -49.998 | 59.000 | 9.590 | 0.083 | 0.000 | AV |
| 11 | 2.874 | 25.263 | 15.559 | -43.737 | 69.000 | 9.596 | 0.107 | 0.000 | QP |
| 12 | 2.874 | 6.668 | -3.036 | -52.332 | 59.000 | 9.596 | 0.107 | 0.000 | AV |
| 13 | 3.590 | 24.636 | 14.909 | -44.364 | 69.000 | 9.601 | 0.126 | 0.000 | QP |
| 14 | 3.590 | 6.900 | -2.827 | -52.100 | 59.000 | 9.601 | 0.126 | 0.000 | AV |
| 15 | 13.842 | 44.139 | 34.246 | -29.861 | 74.000 | 9.648 | 0.245 | 0.000 | QP |
| 16 | 13.842 | 31.605 | 21.712 | -32.395 | 64.000 | 9.648 | 0.245 | 0.000 | AV |
| 17 | 29.326 | 43.905 | 33.911 | -30.095 | 74.000 | 9.633 | 0.361 | 0.000 | QP |
| 18 | 29.326 | 30.890 | 20.896 | -33.110 | 64.000 | 9.633 | 0.361 | 0.000 | AV |

Refer to chapter 5 for the test set-up.

Conclusion:

PASS

4.2 Disturbance power

| | | |
|-----------------|-------------|-------------|
| Standard | EN 55014-1 | |
| Frequency [MHz] | QP [dB(pW)] | AV [dB(pW)] |
| 30 – 300 | 45 – 55 *) | 35 – 45 *) |


*) Limits increasing linearly with the frequency

For tools the following limits apply to the AC Mains port:

| | | |
|---|------------------------------------|-----------------|
| | Rated power below 700 W | Limits as above |
| | Rated power between 700 and 1000 W | Limits +4 dB |
| ✓ | Rated power above 1000 W | Limits +10 dB |

| | |
|------|----------|
| Port | AC Mains |
| Mode | On mode |

Results

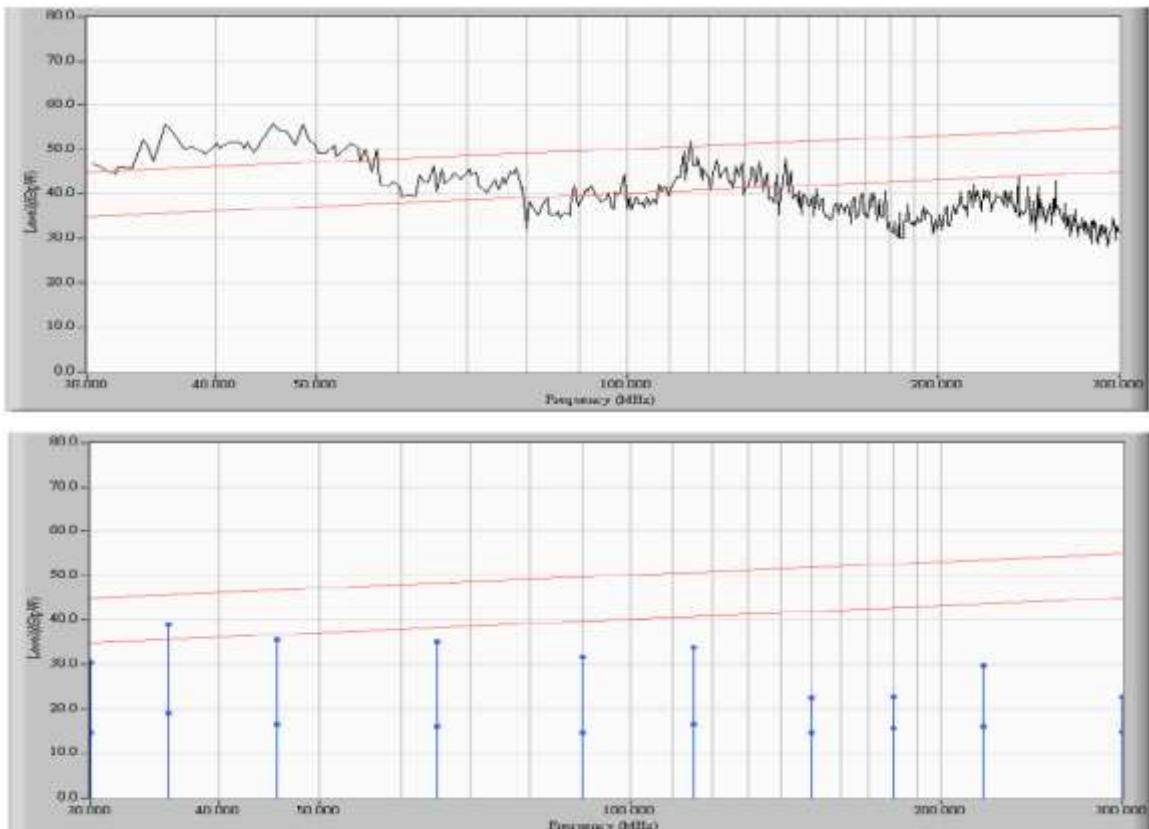

| | Frequency (MHz) | Correct Factor (dB) | Reading Level (dBpW) | Measure Level (dBpW) | Margin (dB) | Limit (dBpW) | Detector Type |
|-----|--------------------|------------------------|-------------------------|-------------------------|----------------|-----------------|---------------|
| 1 | 30.000 | 3.700 | 26.660 | 30.360 | -14.640 | 45.000 | QUASIPEAK |
| 2 | 30.000 | 3.700 | 10.870 | 14.570 | -20.430 | 35.000 | AVERAGE |
| 3 * | 35.687 | 4.720 | 34.420 | 39.140 | -6.614 | 45.754 | QUASIPEAK |
| 4 | 35.687 | 4.720 | 14.390 | 19.110 | -16.644 | 35.754 | AVERAGE |
| 5 | 45.437 | 5.567 | 30.020 | 35.588 | -11.215 | 46.803 | QUASIPEAK |
| 6 | 45.437 | 5.567 | 10.950 | 16.518 | -20.285 | 36.803 | AVERAGE |
| 7 | 65.000 | 6.420 | 28.860 | 35.280 | -13.078 | 48.358 | QUASIPEAK |
| 8 | 65.000 | 6.420 | 9.570 | 15.990 | -22.368 | 38.358 | AVERAGE |
| 9 | 90.000 | 6.823 | 24.840 | 31.663 | -18.108 | 49.771 | QUASIPEAK |
| 10 | 90.000 | 6.823 | 7.760 | 14.583 | -25.188 | 39.771 | AVERAGE |
| 11 | 115.312 | 7.747 | 26.220 | 33.966 | -16.881 | 50.848 | QUASIPEAK |
| 12 | 115.312 | 7.747 | 8.840 | 16.586 | -24.261 | 40.848 | AVERAGE |
| 13 | 150.000 | 8.855 | 13.760 | 22.615 | -29.375 | 51.990 | QUASIPEAK |
| 14 | 150.000 | 8.855 | 5.760 | 14.615 | -27.375 | 41.990 | AVERAGE |
| 15 | 180.000 | 9.968 | 12.820 | 22.788 | -29.994 | 52.782 | QUASIPEAK |

Refer to chapter 5 for the test set-up.

According to clause 4.1.2.3.2 (EN 55014-1):

Appliances are deemed to comply in the frequency range from 300 MHz to 1 000 MHz if both of the following conditions (1) and (2) are fulfilled:

- 1) All emission readings from the equipment under test shall be lower than the applicable limits (Table 2a) reduced by the margin (Table 2b);
- 2) The maximum clock frequency shall be less than 30 MHz.

Conclusion:**PASS**

4.3 Harmonic currents


| | |
|----------|-----------------|
| Standard | EN 61000-3-2 |
| Port | AC Mains supply |
| Mode | On mode |

| | | |
|---|---------|---|
| | Class A | All apparatus not classified as Class B, C or D |
| ✓ | Class B | Portable tools |
| | Class C | Lighting equipment |
| | Class D | Personal computers, television receivers |

Results and limits


Test Result: Pass Source qualification: Normal

Current & voltage waveforms

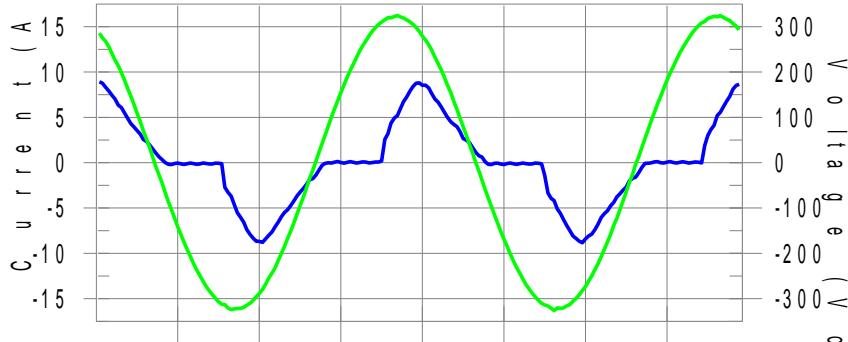

Harmonics and Class B limit line

European Limits

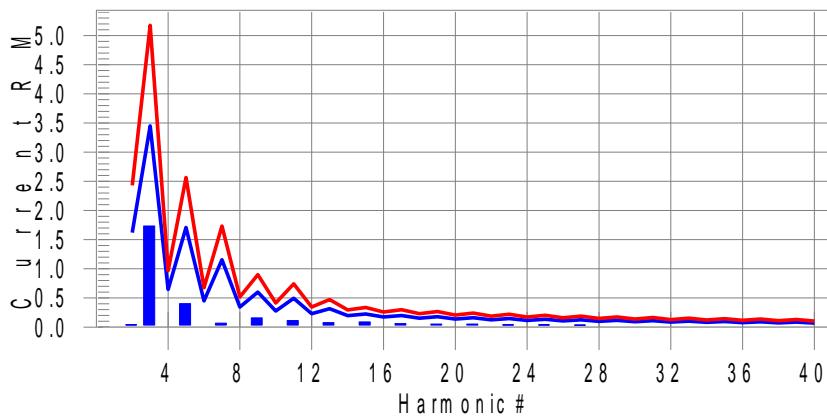

Test result: Pass Worst harmonic was #3 with 34.0% of the limit.

Test Result: Pass Source qualification: Normal
THC(A): 1.802 I-THD(%): 44.1 POHC(A): 0.089 POHC Limit(A): 0.377

Highest parameter values during test:

| | | | |
|----------------|--------|----------------|-------|
| V_RMS (Volts): | 228.73 | Frequency(Hz): | 50.00 |
| I_Peak (Amps): | 9.065 | I_RMS (Amps): | 4.527 |
| I_Fund (Amps): | 4.130 | Crest Factor: | 2.010 |
| Power (Watts): | 791.9 | Power Factor: | 0.771 |

| Harm# | Harms(avg) | 100%Limit | %of Limit | Harms(max) | 150%Limit | %of Limit | Status |
|-------|------------|-----------|-----------|------------|-----------|-----------|--------|
| 2 | 0.041 | 1.620 | 2.5 | 0.044 | 2.430 | 1.8 | Pass |
| 3 | 1.734 | 3.450 | 50.3 | 1.759 | 5.175 | 34.0 | Pass |
| 4 | 0.021 | 0.645 | N/A | 0.023 | 0.968 | N/A | Pass |
| 5 | 0.403 | 1.710 | 23.6 | 0.407 | 2.565 | 15.8 | Pass |
| 6 | 0.011 | 0.450 | N/A | 0.013 | 0.675 | N/A | Pass |
| 7 | 0.068 | 1.155 | 5.9 | 0.074 | 1.733 | 4.3 | Pass |
| 8 | 0.011 | 0.345 | N/A | 0.012 | 0.518 | N/A | Pass |
| 9 | 0.157 | 0.600 | 26.2 | 0.162 | 0.900 | 18.0 | Pass |
| 10 | 0.012 | 0.276 | N/A | 0.014 | 0.414 | N/A | Pass |
| 11 | 0.113 | 0.495 | 22.9 | 0.117 | 0.743 | 15.7 | Pass |
| 12 | 0.012 | 0.230 | N/A | 0.014 | 0.345 | N/A | Pass |
| 13 | 0.078 | 0.315 | 24.6 | 0.082 | 0.473 | 17.3 | Pass |
| 14 | 0.011 | 0.197 | N/A | 0.013 | 0.295 | N/A | Pass |
| 15 | 0.088 | 0.225 | 39.1 | 0.091 | 0.338 | 26.9 | Pass |
| 16 | 0.011 | 0.173 | N/A | 0.012 | 0.260 | N/A | Pass |
| 17 | 0.059 | 0.199 | 29.6 | 0.061 | 0.299 | 20.6 | Pass |
| 18 | 0.011 | 0.153 | N/A | 0.012 | 0.230 | N/A | Pass |
| 19 | 0.054 | 0.178 | 30.2 | 0.057 | 0.267 | 21.2 | Pass |
| 20 | 0.010 | 0.138 | N/A | 0.011 | 0.207 | N/A | Pass |
| 21 | 0.054 | 0.161 | 33.9 | 0.056 | 0.241 | 23.4 | Pass |
| 22 | 0.010 | 0.125 | N/A | 0.011 | 0.188 | N/A | Pass |
| 23 | 0.038 | 0.147 | 25.8 | 0.039 | 0.221 | 17.8 | Pass |
| 24 | 0.009 | 0.115 | N/A | 0.010 | 0.173 | N/A | Pass |
| 25 | 0.039 | 0.135 | 28.6 | 0.040 | 0.203 | 19.9 | Pass |
| 26 | 0.009 | 0.106 | N/A | 0.010 | 0.159 | N/A | Pass |
| 27 | 0.036 | 0.125 | 28.5 | 0.037 | 0.188 | 19.7 | Pass |
| 28 | 0.008 | 0.099 | N/A | 0.009 | 0.149 | N/A | Pass |
| 29 | 0.026 | 0.116 | N/A | 0.027 | 0.174 | N/A | Pass |
| 30 | 0.008 | 0.092 | N/A | 0.009 | 0.138 | N/A | Pass |
| 31 | 0.028 | 0.110 | 25.2 | 0.030 | 0.164 | 18.0 | Pass |
| 32 | 0.008 | 0.086 | N/A | 0.008 | 0.129 | N/A | Pass |
| 33 | 0.024 | 0.102 | N/A | 0.025 | 0.153 | N/A | Pass |
| 34 | 0.007 | 0.081 | N/A | 0.008 | 0.122 | N/A | Pass |
| 35 | 0.019 | 0.096 | N/A | 0.021 | 0.144 | N/A | Pass |
| 36 | 0.007 | 0.077 | N/A | 0.008 | 0.116 | N/A | Pass |
| 37 | 0.020 | 0.092 | N/A | 0.022 | 0.137 | N/A | Pass |
| 38 | 0.007 | 0.073 | N/A | 0.009 | 0.110 | N/A | Pass |
| 39 | 0.017 | 0.087 | N/A | 0.018 | 0.131 | N/A | Pass |
| 40 | 0.007 | 0.069 | N/A | 0.008 | 0.104 | N/A | Pass |

Conclusion:



-page 17 of 21-
V1.1

3173043.50

PASS

4.4 Voltage fluctuations (Flicker)

| | |
|----------|---------------------|
| Standard | EN 61000-3-3 |
| Port | AC Mains supply |
| Voltage | 230 V _{AC} |
| Mode | On mode |

Equipment intended to be connected to 230/400 V_{AC} 50 Hz supply systems may not produce voltage fluctuations in the supply systems due to variation of the input current above the limits as stated below.

| | |
|------------------|-----------------|
| P _{ST} | Not applicable* |
| P _{LT} | Not applicable* |
| dt > 3,3% | ≤ 500 ms |
| d _C | ≤ 3,3% |
| d _{MAX} | ≤ 7% |

| | |
|---|----------------|
| Relative voltage change characteristic dt | 0,0 ms |
| Maximum voltage change d _{MAX} | 2,610% |
| Relative Voltage change d _C | 1,480% |
| Short term flicker P _{ST} | Not applicable |
| Long term flicker P _{LT} | Not applicable |

* The EUT belongs to hand-held tools (portable tools without heating elements), according to EN 61000-3-3, clause A.9, P_{ST} and P_{LT} shall not be evaluated.

Conclusion:

PASS



-page 19 of 21-
V1.1

3173043.50

5 IDENTIFICATION OF THE EQUIPMENT UNDER TEST

The photographs show the tested device.



Figure 2 Conducted Emission test setup



Figure 3 Disturbance power test setup



-page 21 of 21-

V1.1

-----END-----

3173043.50