


# DS1600 PLUNGE CUT CIRCULAR SAW

160 mm plunge cut saw with 55 mm depth of cut. Outstanding accuracy and control when used in conjunction with the optional guide rail.

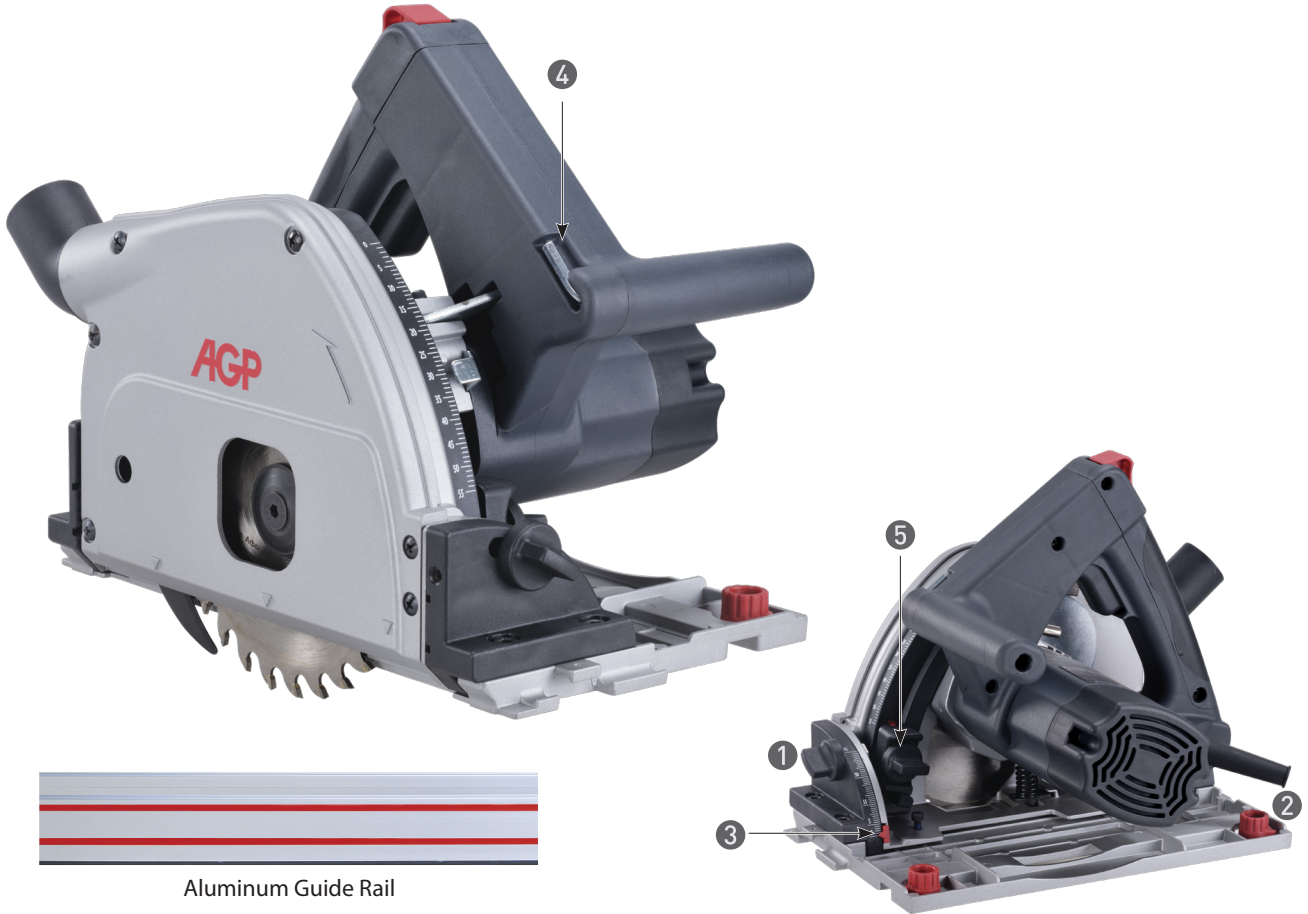

Aluminum Guide Rail

## Features

1. Zero Degree Bevel Fine Adjustment.
2. Guide Clearance Adjustors.
3. Precise Bevel Angle Indication.
4. Onboard Hex Wrench Storage.
5. Adjustable Depth Stop.

Model	DS1600
Power Input	1150 W
Voltage, Frequency	220-240 V~ 50-60 Hz or 110-120 V~ 50-60 Hz
No Load Speed	5500 min <sup>-1</sup>
Bevel Capability	0° to 45°
Max. Blade Diameter	160 mm (6-1/4")
Arbor	20 mm
Max. Depth (Straight)	55 mm (2-3/16")
Max. Depth (45°)	35 mm (1-3/4")
Soft Start & Overload Protection	With
Dimensions (LxWxH)	322 x 228 x 266 mm
Weight	4.8 kg (10.6 lb)
Characteristics / Certification	



Guide Rail Connector



Lever Clamp

### Standard Accessories

M5 Hex Key  
 160 mm 28T TCT Saw Blade  
 (See p. 122)

Optional Accessories	Part Number
Guide Rail (800 mm)	0299-0065-00149-005
Guide Rail (1400 mm)	0299-0065-00149-006
Guide Rail Connector	0299-0106-00000-001
Lever Clamp	305-00179-000-001