

Stone Cutting Circular Saw

INSTRUCTION MANUAL



ORIGINAL INSTRUCTIONS

For your personal safety, **READ** and **UNDERSTAND** before using.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.




CAUTION:

For tools equipped with overload protection, when the motor shuts off due to overload, always run the machine with no load for at least 3 minutes to reduce temperature before returning to operation to avoid burn-out of the motor.

SPECIFICATIONS

Model	SCS7
Voltage	220-240 V~50 /60 Hz, or 110-120 V~50/60 Hz (See Machine Nameplate)
Power	1800 W (220 V), 1680 W (110 V)
No Load min ⁻¹	5800
Arbor	22.23 mm (7/8")
Max. Blade Diameter	180 mm
Max. Cutting Depth	55 mm
Weight	6.7 kg (14.74 lb)

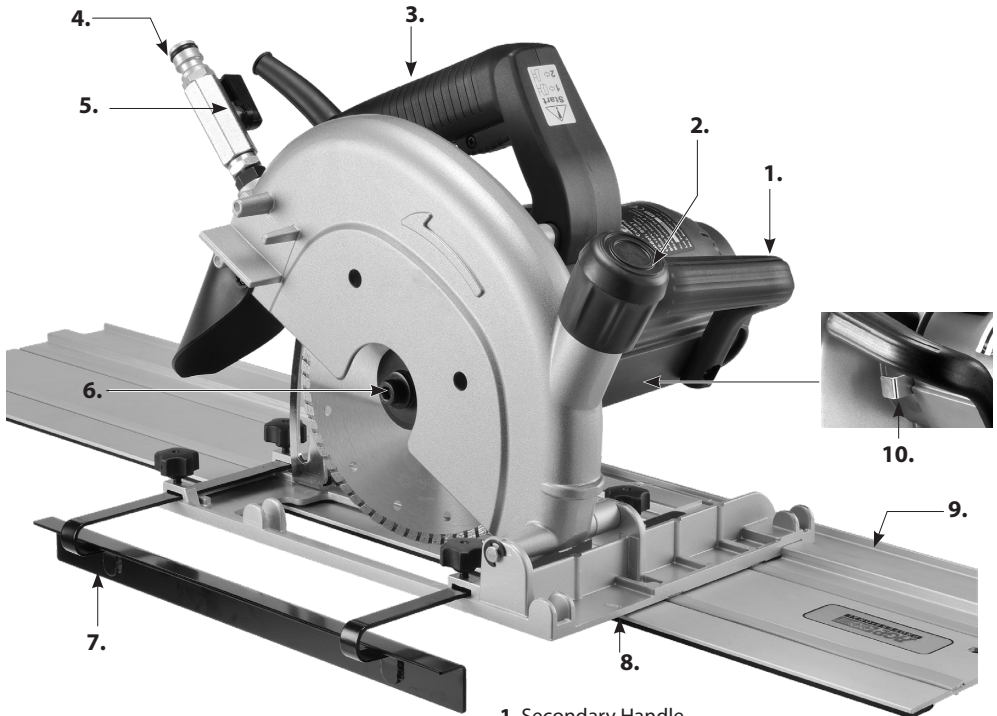

1. Secondary Handle
2. Vacuum Port Cap
3. Main Handle
4. Water Hose Coupling
5. Water Valve
6. Arbor Bolt
7. Parallel Guide
8. Sighting notch
7. Parallel Guide
9. Guide Rail (optional)
10. Spindle Lock
11. Trigger Switch (lock off type)
12. Release Button
13. Brush Cap
14. Depth Stop
15. Depth Scale

GENERAL SAFETY INSTRUCTIONS



WARNING Read all safety warnings, instructions, illustrations and specifications provided with this power tool. Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference. The term “power tool” in the warnings refers to your mains operated (corded) power tool or battery-operated (cordless) power tool.

1) WORK AREA SAFETY

- a. **Keep work area clean and well lit.** Cluttered or dark areas invite accidents.
- b. **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
- c. **Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.
- d. **Never leave the electric power tool unattended.** Only leave the machine when the tool in use has come to a complete standstill.

2) ELECTRICAL SAFETY

- a. **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** Unmodified plugs and matching outlets will reduce risk of electric shock.
- b. **Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is earthed or grounded.
- c. **Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.
- d. **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** Damaged or entangled cords increase the risk of electric shock.
- e. **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** Use of a cord suitable for outdoor use reduces the risk of electric shock.
- f. **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** Use of an RCD reduces the risk of electric shock.

3) PERSONAL SAFETY

- a. **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication.** A moment of inattention while operating power tools may result in serious personal injury.
- b. **Use personal protective equipment. Always wear eye protection.** Protective equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- c. **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool.** Carrying power tools with

your finger on the switch or energising power tools that have the switch on invites accidents.

- d. Remove any adjusting key or wrench before turning the power tool on.** A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
- e. Do not overreach. Keep proper footing and balance at all times.** This enables better control of the power tool in unexpected situations.
- f. Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts.** Loose clothes, jewelry or long hair can be caught in moving parts.
- g. If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used.** Use of dust collection can reduce dust-related hazards.
- h. Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles.** A careless action can cause severe injury within a fraction of a second.

4) POWER TOOL USE AND CARE



- a. Do not force the power tool. Use the correct power tool for your application.** The correct power tool will do the job better and safer at the rate for which it was designed.
- b. Do not use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- c. Disconnect the plug from the power source and/or the battery pack from the power tool before making any adjustments, changing accessories, or storing power tools.** Such preventive safety measures reduce the risk of starting the power tool accidentally.
- d. Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** Power tools are dangerous in the hands of untrained users.
- e. e. Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use.** Many accidents are caused by poorly maintained power tools.
- f. Keep cutting tools sharp and clean.** Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.
- g. Use the power tool, accessories and tool bits etc., in accordance with these instructions, taking into account the working conditions and the work to be performed.** Use of the power tool for operations different from those intended could result in a hazardous situation.
- h. Keep handles and grasping surfaces dry, clean and free from oil and grease.** Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

5) SERVICE

Have your power tool serviced by a qualified repair person using only identical replacement parts.

This will ensure that the safety of the power tool is maintained.

Symbols used in this manual

V.....volts	always wear hearing protection
A.....amperes	wear safety-approved hard hat
Hz.....hertz	Keep hands clear – pinching hazard.
W.....watt	 DANGER! Keep hands away from cutting area and the blade.
~.....alternating current	
n_0no load speed	 rotating parts - entanglement hazard. Keep hands, loose clothing and long hair away from moving parts
min^{-1}revolutions or reciprocation per minute	
warning of general danger	
with electrical earth	
read these instructions	
always wear eye protection	 do not dispose of electric tools, accessories and packaging together with household waste material
always wear a dust mask.	

CUT-OFF MACHINE SAFETY WARNINGS

- a. **Position yourself and bystanders away from the plane of the rotating wheel.** The guard helps to protect the operator from broken wheel fragments and accidental contact with wheel.
- b. **Use only diamond cut-off wheels for your power tool.** Just because an accessory can be attached to your power tool, it does not assure safe operation.
- c. **The rated speed of the accessory must be at least equal to the maximum speed marked on the power tool.** Accessories running faster than their rated speed can break and fly apart.
- d. **Wheels must be used only for recommended applications. For example: do not grind with the side of a cut-off wheel.** Abrasive cut-off wheels are intended for peripheral grinding, side forces applied to these wheels may cause them to shatter.
- e. **Always use undamaged wheel flanges that are of correct diameter for your selected wheel.** Proper wheel flanges support the wheel thus reducing the possibility of wheel breakage.
- f. **The outside diameter and the thickness of your accessory must be within the capacity rating of your power tool.** Incorrectly sized accessories cannot be adequately guarded or controlled.
- g. **The arbour size of wheels and flanges must properly fit the spindle of the power tool.** Wheels and flanges with arbour holes that do not match the mounting hardware of the power tool will run out of balance, vibrate excessively and may cause loss of control.
- h. **Do not use damaged wheels. Before each use, inspect the wheels for chips and cracks. If the power tool or wheel is dropped, inspect for damage or install an undamaged wheel. After inspecting and installing the wheel, position yourself and bystanders away from the plane of the rotating wheel and run the power tool at maximum no load speed for one minute.** Damaged wheels will normally break apart during this test time.
- i. **Wear personal protective equipment. Depending on application, use face shield, safety goggles or safety glasses. As appropriate, wear dust mask, hearing protectors, gloves and shop apron**

capable of stopping small abrasive or workpiece fragments. The eye protection must be capable of stopping flying debris generated by various operations. The dust mask or respirator must be capable of filtering particles generated by your operation. Prolonged exposure to high intensity noise may cause hearing loss.

- j. Keep bystanders a safe distance away from work area. Anyone entering the work area must wear personal protective equipment.** Fragments of workpiece or of a broken wheel may fly away and cause injury beyond immediate area of operation.
- k. Position the cord clear of the spinning accessory.** If you lose control, the cord may be cut or snagged and your hand or arm may be pulled into the spinning wheel.
- l. Regularly clean the power tool's air vents.** The motor's fan can draw the dust inside the housing and excessive accumulation of powdered metal may cause electrical hazards.
- m. Do not operate the power tool near flammable materials.** Do not operate the power tool while placed on a combustible surface such as wood. Sparks could ignite these materials.

KICKBACK AND RELATED WARNINGS

Kickback is a sudden reaction to a pinched or snagged rotating wheel. Pinching or snagging causes rapid stalling of the rotating wheel which in turn causes the uncontrolled cutting unit to be forced upwards toward the operator. For example, if an abrasive wheel is snagged or pinched by the workpiece, the edge of the wheel that is entering into the pinch point can dig into the surface of the material causing the wheel to climb out or kick out. Abrasive wheels may also break under these conditions. Kickback is the result of power tool misuse and/or incorrect operating procedures or conditions and can be avoided by taking proper precautions as given below.

- a. Maintain a firm grip on the power tool and position your body and arm to allow you to resist kickback forces.** The operator can control upward kickback forces, if proper precautions are taken.
- b. Do not position your body in line with the rotating wheel.** If kickback occurs, it will propel the cutting unit upwards toward the operator.
- c. Do not attach a saw chain, woodcarving blade, segmented diamond wheel with a peripheral gap greater than 10 mm or toothed saw blade.** Such blades create frequent kickback and loss of control.
- d. Do not "jam" the wheel or apply excessive pressure. Do not attempt to make an excessive depth of cut.** Overstressing the wheel increases the loading and susceptibility to twisting or binding of the wheel in the cut and the possibility of kickback or wheel breakage.
- e. When the wheel is binding or when interrupting a cut for any reason, switch off the power tool and hold the cutting unit motionless until the wheel comes to a complete stop. Never attempt to remove the wheel from the cut while the wheel is in motion otherwise kickback may occur.** Investigate and take corrective action to eliminate the cause of wheel binding.
- f. Do not restart the cutting operation in the workpiece. Let the wheel reach full speed and carefully re-enter the cut.** The wheel may bind, walk up or kickback if the power tool is restarted in the workpiece.
- g. Support any oversized workpiece to minimize the risk of wheel pinching and kickback.** Large workpieces tend to sag under their own weight. Supports must be placed under the workpiece near the line of cut and near the edge of the workpiece on both sides of the wheel.

ADDITIONAL SAFETY RULES

- a. **Only use diamond wheels with this tool. Bonded abrasive wheels are not permitted.**
- b. **Diamond wheels must have a maximum diameter of 180 mm, with wheel thickness of 1.0 mm to 3.0 mm, and with 22.23 mm (7/8") bore.**
- c. **Only use diamond wheels which are rated for 5800 rpm or higher.**
- d. **Segmented diamond wheels shall have a maximum 10 mm peripheral gap between segments and with a negative rake angle.**
- e. **Wear gloves when handling diamond wheels.**
- f. **Ensure that the tool is always used on a stable and level surface. Workpiece should be straight and firmly clamped to avoid possible movement and pinching as the cut nears completion.**
- g. **Do not exceed 50 mm thickness workpieces.**
- h. **Store diamond wheels in such a way that the blade is protected from damage.**

SPECIFIC SAFETY RULES

- 1. **Keep hands away from cutting area and blade at all times! Keep your second hand on an auxiliary handle.** If both hands are holding the saw, they cannot be cut by the blade.
- 2. **Do not reach underneath the work.**
- 3. **Hold tool by insulated gripping surfaces when performing an operation where the cutting tools may contact hidden wiring or its own cord.** Contact with a "live" wire will make exposed metal parts of the tool "live" and shock the operator.
- 4. **Always use blades with correct size and shape arbor holes.** Blades that do not match the mounting hardware of the saw will run eccentrically, causing loss of control.
- 5. **Never use damaged or incorrect arbor flanges or bolts.** The arbor flanges and bolt were specially designed for your saw, for best performance and safety of operation.
- 6. **Maintain a firm grip on the saw and position your body and arm in a way that allows you to resist KICKBACK forces.** KICKBACK forces can be controlled by the operator, if proper precautions are taken.
- 7. **Do not use a dull or damaged blade.**
- 8. **Use only recommended blades, rated at the machine's maximum rated RPM or higher with correct arbor hole.**
- 9. **Tighten blade retaining bolt** and all clamps before operating.
- 10. **Check the inside surfaces** of the arbor flanges as well as the sides of the blade for freedom from any foreign matter.
- 11. **Check the blade** for cracks or other damage before operation. Replace cracked or damaged blade immediately. Carry out a test run without load for at least 30 seconds before use.
- 12. **Never start the tool** with the workpiece against the blade.
- 13. **Allow the motor to achieve full speed** before cutting.
- 14. **Important: After completing the cut,** release power switch and wait for coasting blade to stop completely before putting the saw down
- 15. **Never operate the tool in an area with flammable solids, liquids, or gases.** Sparks from the commutator/carbon brushes could cause a fire or explosion.
- 16. **There are certain applications for which this tool was designed.** The manufacturer strongly recommends that this tool NOT be modified and/or used for any application other than for which it was designed. If you have any questions relative to its application DO NOT use the tool until you have written the manufacturer and have been advised.
- 17. **Only use the machine for cutting in stone, concrete or masonry.**
- 18. **Use the auxiliary handles supplied with the tool.** Loss of control can cause personal injury.
- 19. **Use a residual current device (PRCD) (not included) to protect from current surges.**

20. **Keep power supply cord clear from the working range of the machine.** Always lead the cable away behind you.
21. **Immediately switch off the machine if unusual vibrations or if other malfunctions occur.** Check the machine in order to find out the cause.
22. **Only use and store diamond blades according to the Manufacturer's instructions.**
23. **Pay attention to the dimensions of the blades.** The diameter of the center bore must engage the arbor without play. If not use any necessary reduction pieces or adapters (supplied with the blade) to ensure a proper fit.
24. **Take care to avoid hidden electric lines, gas and water pipes.** Check your working area, e.g. with a metal detector before commencing work.
25. **The dust that arises when working with this tool can be harmful to health.** Use a dust absorption system and wear a suitable dust protection mask and remove deposited dust with a vacuum cleaner.

ELECTRICAL CONNECTION

The network voltage must conform to the voltage indicated on the tool name plate. Under no circumstances should the tool be used when the power supply cable is damaged. A damaged cable must be replaced immediately by an authorized Customer Service Center. Do not try to repair the damaged cable yourself. The use of damaged power cables can lead to an electric shock.

INTENDED USE

This saw is designed exclusively for wet or dry cutting of stone, concrete and masonry. This machine should not be used for cutting other materials. The machine should not be converted or modified, e.g. for any other form of use, other than as specified in these operating instructions. The user shall be liable for damages and accidents due to incorrect use.

EXTENSION CABLE

If an extension cable is required, it must have a sufficient cross-section so as to prevent an excessive drop in voltage or overheating. An excessive drop in voltage reduces the output and can lead to failure of the motor. The following table shows you the correct cable diameter as a function of the cable length for this machine. Use only U.L. and CSA listed extension cables. Never use two extension cables together. Instead, use one long one.

Total Extension Cord Length (feet)	Cord Size (AWG)
25	16
50	12
100	10
150	8
200	6

UNPACKING

Carefully remove the tool and all loose items from the shipping container. Retain all packing materials until after you have inspected and satisfactorily operated the machine.

NOTE: An appropriate diamond blade must be mounted to the machine before operating. Refer to the section of this manual: "INSTALLING THE BLADE"

CARTON CONTENTS

- Stone Cutting Circular Saw Machine
- * Vacuum hose connector
- * Parallel guide
- * Quick-release water hose coupling
- * L-hex wrench


DO NOT OPERATE THIS TOOL UNTIL YOU READ AND UNDERSTAND THE ENTIRE INSTRUCTION MANUAL.

INSTALLING THE DIAMOND BLADE -ENSURE THAT TOOL IS DISCONNECTED FROM POWER SOURCE.

To install the blade

1. Remove any accumulated debris in the guards and around the arbor.
2. First mount the Inner Flange, then the blade, making sure the direction of rotation arrow of the blade and the arrow on the machine are in the same direction.
3. Mount the Outer Flange, Washer and Arbor Bolt.

NOTE: Use blades that have an arbor bore which can fit, and that are rated for the machine's maximum rated speed or higher.




REMOVING THE BLADE-DISCONNECT TOOL FROM POWER SOURCE.

Removal is the opposite of installing the blade.

TO ADJUST DEPTH OF CUT- DISCONNECT TOOL FROM POWER SOURCE.


To adjust the depth of cut

Loosen the Depth Stop Lever by pushing it forwards and adjust the depth of cut to the desired amount. Then retighten the Depth Stop Lever.



HOW TO USE THE SIGHTING NOTCH

To aid in free-hand cutting, a sighting notch is located at the front of the base plate. This mark corresponds to the blade's cutting line.



VACUUM DUST COLLECTION

There is a vacuum port provided on the blade cover to collect dust when operating.

Simply attach the vacuum cleaner hose to the vacuum port. Keep the Cap in place when not in use.




WATER FEED SYSTEM

WARNING: This machine is equipped with a Portable Residual Current Device (PRCD) also known as a Ground Fault Circuit Interrupter (GFCI). Always use this device whenever using the machine to reduce the risk of shock hazards. Always position the device PRCD as close as possible to the power source.

Test the PRCD device before each use.

Press the "Test" button to test. Press the "Reset" button to energize the circuit to the machine.



WARNING: Never use the machine without the PRCD fault-current safety switch supplied.

WARNING: Check all connections of the water feed system to ensure there are no leaks. Inspect hoses and other critical parts which could deteriorate.

WARNING: If you detect a leak in any part of the water supply system, shut the machine down immediately and repair the fault.

WARNING: The maximum water pressure should not exceed 70 psi (4 bar).


The water feed system allows the machine to cut more effectively. Ensure that a PRCD interrupter unit is always used. Mount the Quick Release Water Coupling to the water supply hose. Adjust the Water Valve for the desired amount of water flow.

WARNING: Great care must always be taken to avoid the risk of electrocution whenever using water. Never allow water to contact the electrical parts of the tool. Always use a PRCD Interrupter.




PARALLEL GUIDE

The Parallel Guide allows straight cuts to a desired distance from the edge. To mount, insert the Parallel Guide into the slot in the Base Plate and tighten the Thumb Knobs at the desired position.



STARTING AND STOPPING TOOL

Make sure that the power circuit voltage is the same as that shown on the specification plate of the machine and that switch is "OFF" before connecting the tool to the power circuit



Switching the machine on and off

Keep the machine steady during switching and during use by holding the main handle and the secondary handle with both hands.

To switch on:

This machine is equipped with a "LOCK-OFF" switch. To press the switch, you must first press the release button located at the top of the switch. Then the trigger switch will be free to be pressed to start the machine.

To switch off:

Release the trigger switch to stop the machine. After the machine has been switched off, the blade will still rotate for a time, take care that parts of your body do not come into contact with the blade while it is still rotating !

ELECTRONIC OVERLOAD PROTECTION

If while cutting the machine reaches a load approaching overload level, the electronic overload protection will kick in and shut the saw off. When this happens, release the trigger and return the machine to its topmost position (out of the cut) and wait at least 3 seconds before continuing.

HOW TO USE THE TOOL

Effective control of this powerful saw requires two-handed operation for maximum protection. Note there is a secondary handle as well as a side handle which has two choices of position. Choose the handle according to the working conditions. Support the work properly and to hold the saw firmly **WITH BOTH HANDS** to prevent loss of control which could cause personal injury. Always hold one of the auxiliary handles with the left hand and the main handle with the right hand for proper hand support of the saw. Protect your eyes from injury with safety glasses or goggles.

OPERATION

1. Adjust the depth of cut.
2. Draw a cutting line before beginning cutting so it is easy to make straight cuts.
3. Place the machine in position on the workpiece.
4. While the blades are not yet in contact with the workpiece, press the lock button squeeze the trigger and allow the machine to reach full speed.
5. Holding firmly with both hands, slowly advance the machine until it makes contact with the workpiece. Begin moving forward along the line of cut Take care that the base remains firmly on the workpiece.

CAUTION: Take care not to cut in a curved line. This will likely shatter the diamond blades causing a severe hazard.

6. When the cut is finished, allow the coasting blade to come to a full stop before setting down.

NOTE: Only operate the machine forwards relative to itself and never backwards. If you cut backwards there is the danger that the machine might be accelerated out of the cutting groove (recoil) and cause serious injury.

CAUTION: Keep the cord away from cutting area to prevent it from becoming entangled in the workpiece.

Do not force the cut. Let the saw do the cutting at the rate of speed permitted by the type of cut and workpiece.

SHARPENING DULL DIAMOND BLADES

If a lot of sparks are seen while cutting, this is a sign that the blade is becoming dull. To create better diamond exposure (sharpen), make several cuts in a special sharpening stone for diamond blades or alternately use calcareous sandstone.

MAINTENANCE


Every 50 hours of operation blow compressed air through the motor while running at no load to clean out accumulated dust. (If operating in especially dusty conditions, perform this operation more often.)

KEEP TOOL CLEAN

Periodically blow out all air passages with dry compressed air. All plastic parts should be cleaned with a soft damp cloth. NEVER use solvents to clean plastic parts. They could possibly dissolve or otherwise damage the material. Wear safety glasses while using compressed air.

THE CARBON BRUSHES

The carbon brushes are a normal wearing part and must be replaced when they reach their wear limit.



To replace:

simply remove the brush caps and withdraw the old brushes. Replace with new brushes (always replace as a pair) ensuring that they align properly and slide freely. Then replace the brush caps.




If the replacement of the power supply cord is necessary, this has to be done by the manufacturer or their agent in order to avoid a safety hazard.

WARNING: All repairs must be entrusted to an authorized service center. Incorrectly performed repairs could lead to injury or death.

EXPLODED VIEW

NO.01~84 Version 2023.02.07 D.888

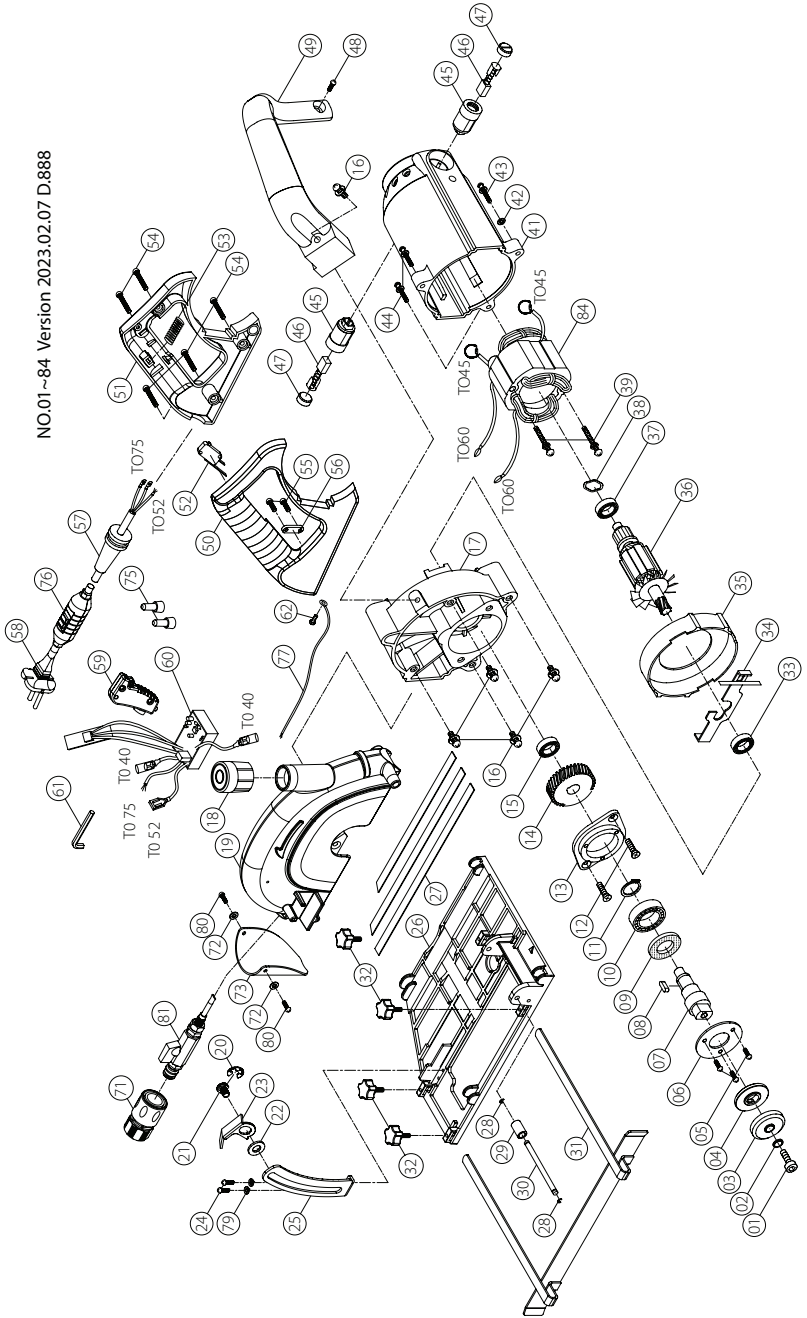

PARTS LIST

NO.	Parts Name	Q'TY	NO.	Parts Name	Q'TY
1	SOCKET CAP SCREW (M8x20xP1.25)	1	37	BALL BEARING (6200)	1
2	FLAT WASHER (Ø8xØ20x3)	1	38	WAVE SPRING WASHER (Ø29.5)	1
3	OUTER FLANGE	1	39	PANHEAD TAPPING SCREW (M5x60)	2
4	INNER FLANGE (Ø21.9)/(Ø22.2)	1	41	MOTOR HOUSING	1
5	FLAT HEAD MACHINE SCREW (M4x8xP0.7)	3	42	FLAT WASHER (Ø5xØ12x1)	1
6	BEARING COVER PLATE	1	43	PANHEAD MACHINE SCREW (M5x30xP0.8)	1
7	SPINDLE (67.7MM)	1	44	PANHEAD MACHINE SCREW (M5x50xP0.8)	2
8	PARALLEL KEY (5x5x12)	1	45	CARBON BRUSH HOLDER (7x17)	2
9	FELT OILER (Ø19xØ35x3.2)	1	46	CARBON BRUSH (7x17x17)	2
10	BALL BEARING (6202)	1	47	BRUSH CAP (7x17)	2
11	EXTERNAL CIRCLIP (S-15)	1	48	PANHEAD TAPPING SCREW (M5x20)	1
12	FLAT HEAD MACHINE SCREW (M5x15xP0.8)	2	49	AUX. HANDLE	1
13	GEAR PLATE	1	50	HANDLE HALF-RIGHT	1
14	OUTPUT GEAR (M1.25x30T)	1	51	HANDLE HALF-LEFT	1
15	BALL BEARING (608)	1	52	SWITCH (110V&220V)	1
16	PANHEAD MACHINE SCREW (M5x20xP0.8)	5	53	SPRING (Ø0.8 x Ø6.4 x Ø8 x 9T x 26L)	1
17	GEAR HOUSING	1	54	PANHEAD TAPPING SCREW (M4x25)	5
18	END CAP	1	55	PANHEAD TAPPING SCREW (M4x14)	2
19	BLADE COVER	1	56	CABLE CLIP	1
20	E-CLIP (E-10)	1	57	CORD ARMOR	1
21	DEPTH LOCK PIN (M8x12)	1	58	POWER SUPPLY CABLE	1
22	FLAT WASHER (Ø8xØ20x1)	1	59	TRIGGER SWITCH	1
23	DEPTH LOCK LEVER	1	60	ELECTRONICS UNIT (110V/220V)	1
24	PANHEAD MACHINE SCREW (M4x8xP0.7)	2	61	HEX KEY (M6)	1
25	DEPTH STOP TRACK	1	62	PANHEAD MACHINE SCREW (M4x6xP0.7)	1
26	BASE	1	71	WATER COUPLING (1/2'')/(3/4')	1
27	ANTI-FRICTION STRIPS	1	72	FLAT WASHER (Ø4xØ10x1)	2
28	E-CLIP (E-7)	2	73	RUBBER FENDER	1
29	BUSHING	1	75	CRIMP CAP CONNECTOR (C4)	2
30	SWIVEL AXLE	1	76	PRCD INTERRUPTER PROTECTION (110V/220V)	1
31	RIP FENCE	1	77	WIRE LEAD (1007-20#25CM)	1
32	THUMB SCREW (M5x8)	4	79	SPRING WASHER (M4)	2
33	BALL BEARING (6002)	1	80	PANHEAD MACHINE SCREW (M4x6xP0.7)	2
34	BLADE LOCK COVER	1	81	WATER FEED CONNECTOR KIT	1
35	FAN SHROUD	1	84	STATOR (110V/220V-94x54x45)	1
36	ARMATURE (110V/220V-94x54x45)	1			

WIRING

